



24" ADA COMPLIANT SERIES SINGLE DOOR



HB24RS Refrigerator



HB24BS Beverage Center



HB24FS Freezer Drawers



JOB	
AREA	
ITEM NO.	
MODEL NO.	

HB24RS	Refrigerator
HB24FS	Freezer
HB24BS	Beverage Center
HB24WS	Wine Reserve

MODEL NUMBERS		HB24RS	HB24FS	HB24BS	HB24WS
MODEL DESCRIPTION		Refrigerator	Freezer	Beverage Center	Wine Reserve
OVERALL DIMENSIONS	Width - in. (mm)	23-7/8 (606)	23-7/8 (606)	23-7/8 (606)	23-7/8 (606)
	Depth - in. (mm)	24 (610)	24 (610)	24 (610)	24 (610)
	Height - in. (mm)	32 (813)	32 (813)	32 (813)	32 (813)
OPENING DIMENSIONS	Width - in. (mm)	24 (610)	24 (610)	24 (610)	24 (610)
	Depth - in. (mm)	24 (610)	24 (610)	24 (610)	24 (610)
	Height - in. (mm)	32-1/8 (816)	32-1/8 (816)	32-1/8 (816)	32-1/8 (816)
INTERNAL VOLUME Net. Cu. Ft. (L)		4.8 (136)	4.8 (136)	4.8 (136)	4.8 (136)
SHIPPING WEIGHT Lbs. (kg.)		195 (88)	195 (88)	195 (88)	195 (88)
ELECTRICAL SPECIFICATIONS	Electrical Supply	120 VAC/60 Hz/1 Ph	120 VAC/60 Hz/1 Ph	120 VAC/60 Hz/1 Ph	120 VAC/60 Hz/1 Ph
	Running Load Amps	2.3	2.3	2.3	2.3
	Electrical Connection	Cord connected	Cord connected	Cord connected	Cord connected
	Cord Plug Type	NEMA 5-15P	NEMA 5-15P	NEMA 5-15P	NEMA 5-15P
	Cord Length	6'	6'	6'	6'
	Defrost Initiation	Automatic	Automatic	Automatic	Automatic
	Defrost Type	Off cycle	Off cycle	Off cycle	Off cycle
	Thermostat	Electromechanical	Electromechanical	Electromechanical	Electromechanical
	Lighting Type	Incandescent	Incandescent	Incandescent	Incandescent
REFRIGERATION SPECIFICATIONS	Horsepower	1/6	1/6	1/6	1/6
	Refrigerant	R134a	R134a	R134a	R134a
	Expansion Device	Capillary Tube	Capillary Tube	Capillary Tube	Capillary Tube
	Temperature Range F (C)	33°-42° (.5°- 5.6°)	-10°- 10° (-23.3° -12.2°)	33°- 48° (3.3°-8.9°)	45°-65° (7.2°-18.3°)
	Front Vented	Yes	Yes	Yes	Yes
PLUMBING		None Required	None Required	None Required	None Required

AVAILABLE DOOR/DRAWER STYLES	HB24RS	HB24FS	HB24BS	HB24WS
Solid Black Vinyl/Field Laminate (Lock Optional)	X	X	X	X
Solid Stainless Steel (Lock Optional)	X	X	X	X
Solid w/Laminate (Lock Optional)	X	X	X	X
Glass w/Black Vinyl/Field Laminate (Lock Optional)	X		X	X
Glass w/Stainless Steel (Lock Optional)	X		X	X
Glass w/Laminate (Lock Optional)	X		X	X
Drawers Solid Black Vinyl/Field Laminate (Lock INCLUDED)	X	X		
Drawers Stainless Steel (Lock INCLUDED)	X	X		
Drawers w/Laminate (Lock INCLUDED)	X	X		

*Doors/Drawers can be finished with wood overlay panels (by others). Contact Perlick for drawing templates.



24" ADA COMPLIANT SERIES



SINGLE DOOR

CABINET CONSTRUCTION	HB24RS	HB24FS	HB24BS	HB24WS
Cabinet Construction - Exterior	Top & sides are Stainless Steel. Back is Galvanized. Doors - see door chart on front.			
Cabinet Construction - Interior	Stainless Steel			
Cabinet Insulation	Polyurethane-Ecomate. Wall Thickness 2" (foamed-in-place)			

SHELVING (Excludes Drawers)	HB24RS	HB24FS	HB24BS	HB24WS
Black Vinyl-Coated Full Extension Shelves	2	2	1	-
Black Vinyl-Coated Full Extension Wine Shelves f/(8) 750ml Bottles	-	-	2	4

DOOR HANDLES	HB24RS	HB24FS	HB24BS	HB24WS
Door Handles	24" Full Length - Stainless Steel, Classic 6" Black Vinyl Handle w/Chrome Ends, 12" Stainless Steel, Tab Handles - Top Mounted			

NOTE: This equipment is intended for the storage and display of non-potentially hazardous bottled or canned products only!

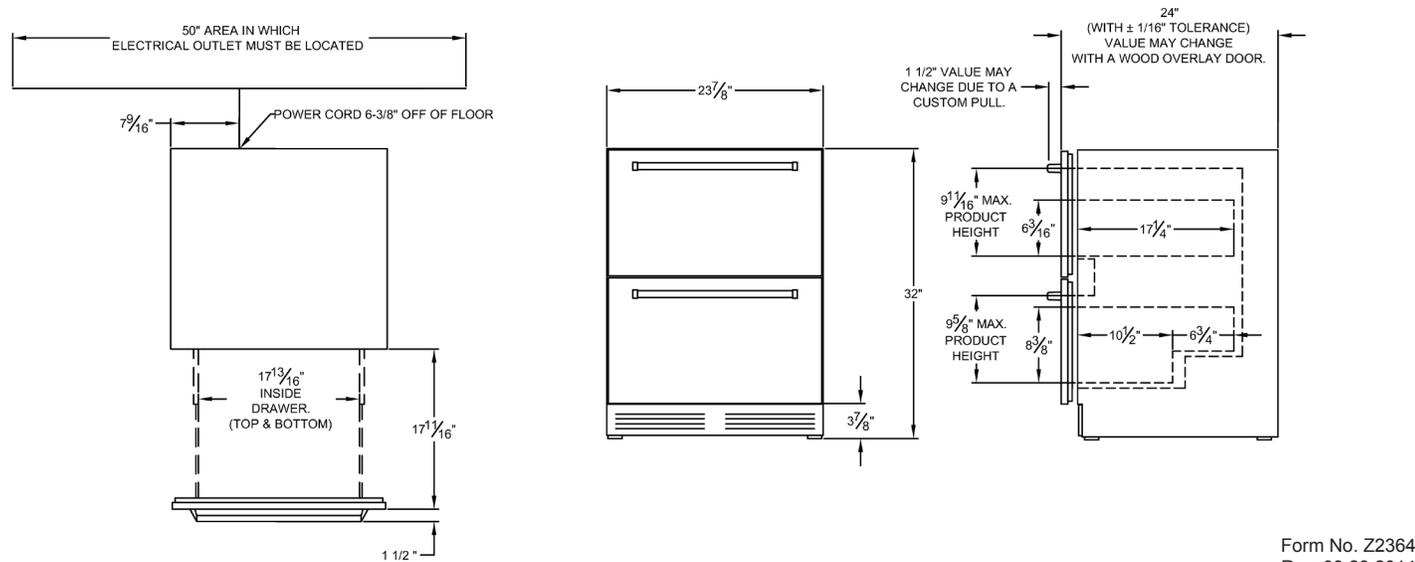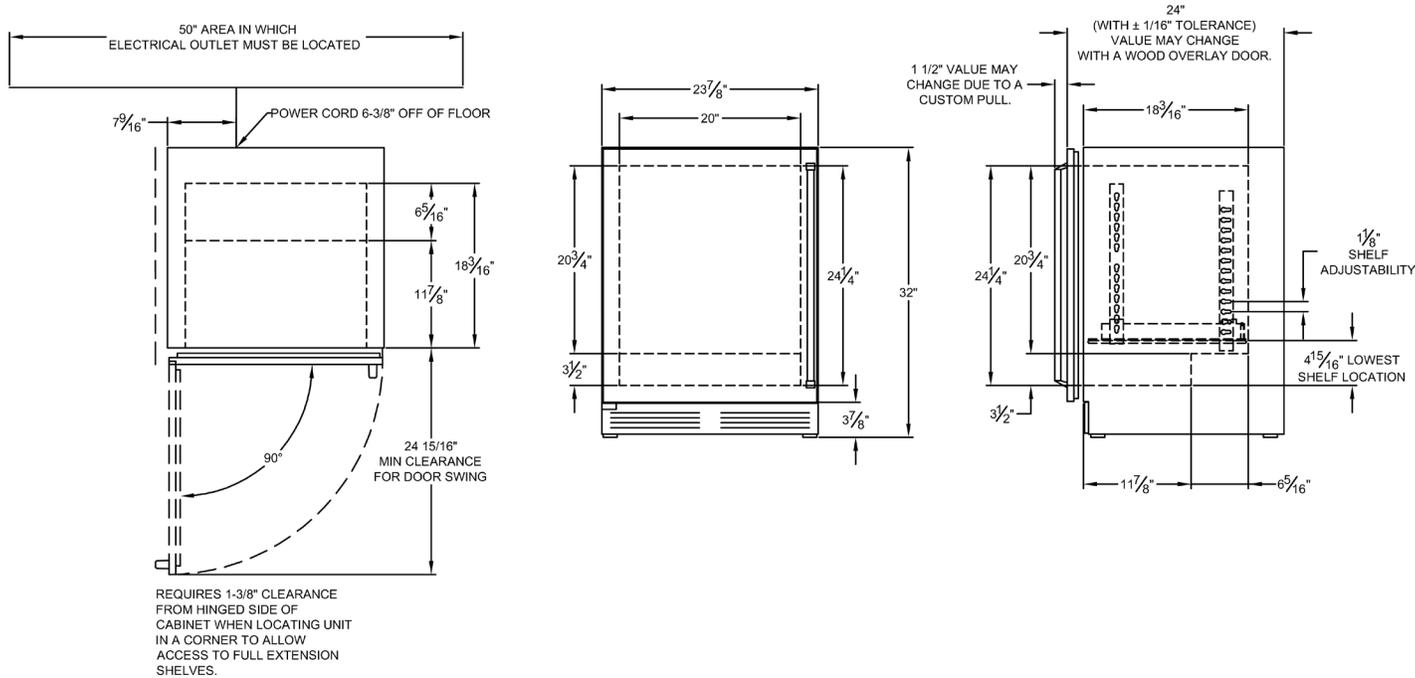

Form No. Z2364
Rev. 09.29.2014