STANDARD ICE CHESTS (FULL DEPTH) WITH COLD PLATE

MODELS

TSF Series

- □ TSF24IC10
- □ TSF30IC10
- □ TSF36IC10
- □ TSF42IC10
- □ TSF48IC10



Perlick Features

- Patented design conceals cold plate under liner for improved sanitation.
- Dent resistent ABS top ledge
- Stainless steel legs install without tools and have "Rust Free" thermoplastic feet.
- New full 24" depth

Form No. IC10




Size and Specifications

Standard Ice Chests with Cold Plate

Job	
Area	
Item No.	
Model No.	

MODEL NOS.	TSF24IC10	TSF30IC10	TSF36IC10	TSF42IC10	TSF48IC10		
LENGTH IN. (mm)	24" (610)	30″ (762)	36" (914)	42" (1067)	48" (1219)		
ICE CAP. lbs. (kg)	65 (29.4)	85 (38.6)	105 (47.7)	125 (56.7)	145 (65.8)		
SHIP WT. lbs. (kg)	140 (95.5)	150 (68.0)	160 (72.6)	170 (77.1)	180 (81.6)		
FRONT & SIDES	Stainless steel, top rim ABS						
BACKSPLASH	Stainless steel 6" high (4" optional) with 1" return at top, mechanically fastened and sealed to ice chest top with steel support brackets						
BACK & BOTTOM	Galvanized steel						
INTERIOR	Stainless steel with 1/4" radius corners, welded and sealed with non-exposed cold plate. Interiors can be divided with freestanding ice dividers						
INSULATION	Foamed-in-place polyurethane						
LEGS	1-5/8" tubular, stainless steel with 1" adjustable thermoplastic foot						
PLUMBING	Drain connection– 1/2" NPS male						
COLD PLATE	Cast aluminum plate concealed under ice chest liner. Cold plate has 2 full-length circuits and 8 half- length circuits. Connections– 5/16" O.D. stainless steel tubing with swagged end to accept standard 1/4" I.D. beverage tubing						
OPERATING SPECIFICATIONS	Each full circuit will deliver four, 6 oz drinks per minute at 40° continuously, or 40 oz. every three minutes in a single draw (Flow rate 2 oz./sec, 75° ambient, 75° product).						
ACCESSORIES	Cover (stainless steel, two-piece, removable), Ice Divider, 2-Piece Cover, Bottle Wells, Soda Chase, Condiment Trays						

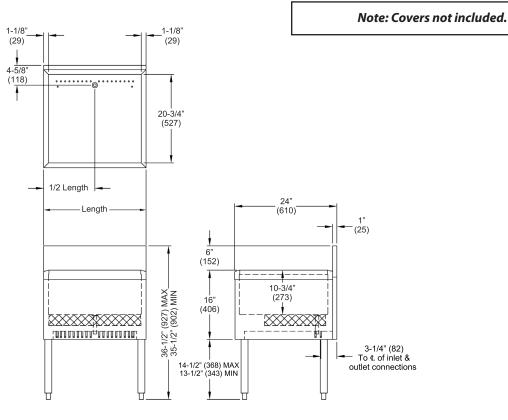

Form No. IC10



8300 West Good Hope Road • Milwaukee, WI 53223 • Phone 414.353.7060 • Fax 414.353.7069 Toll Free 800.558.5592 • E-Mail perlick@perlick.com • www.perlick.com

Perlick is committed to continuous improvement. Therefore, we reserve the right to change specifications without prior notice