

Serving Lines.	Fiberglass	Electric Heated W	/ell models HTD & HTD-9
----------------	-------------------	--------------------------	--------------------------------

Enclosed Base	□14GFG HTD-2	□14GFG HTD-3	□14GFG HTD-4	☐ 14GFG HTD-5	□14GFG HTD-6
Storage Base	□14GFG HTD-3S	□14GFG HTD-4S	□14GFG HTD-5S	\square 14GFG HTD-6S	

Description:

Randell's 14GFG HTD Series Electric Heated Well Units designed for virtually any hot food serving application, the 14GFG HTD series is enclosed in a brilliant one-piece fiberglass body and 14 gauge stainless steel top.

Specifications:

CABINET CONSTRUCTION: One-piece molded fiberglass body for smooth exterior finish. All corners and areas where accessories are mounted are reinforced internally with metal backers.

TOP CONSTRUCTION: Exterior top is standard in reinforced 14 gauge 300 series stainless steel with #4 finish.

HOT WELL CONSTRUCTION: The hot wells are constructed of die stamped and annealed stainless steel and are provided with individual drains manifolded to a common gate valve. The gate valve is accessed through an enclosed housing with louvered access door. Two types of fittings are provided to offer flexibility in type of drain hose the operator wishes to attach (hose not included). Only available in single phase.

Standard Features:

- Easy access to drain and controls
- Easy access to service electrical components
- · Concealed locking mechanism with easy to use spring-activated catch

Additional Available Configurations:

•14GFG HTD "S" Series

Same basic construction of standard enclosed base series with an optional open shelf storage compartment. Available in the 3, 4, 5 & 6 well models to offer most efficient space capacity.

 14GFG HTD "B" Series (see HTD-B specification) Same basic construction of standard enclosed base series with an optional heated storage compartment. Available in the 3, 4, 5 & 6 well models.

model 14GFG HTD-4S shown with optional kick plate



Available Fiberglass Colors:


	Pitch Black
	Dark-Bark Brown
	Cabernet Wine
	British Racing Green
	Tin Man Gray
	True Blue
	Light Sky Blue
	Candy Apple Red
	Tiger Lilly Orange
	Canary Yellow
	White
On	tions & Accessories

☐ Canony

ш	duriopy
	Overshelves
	Trayslides
	Corian top
	Granite top
	Kick Plate
	Graphics
	Sneeze Guards
	Elementary School Height
	Electrical Distribution System





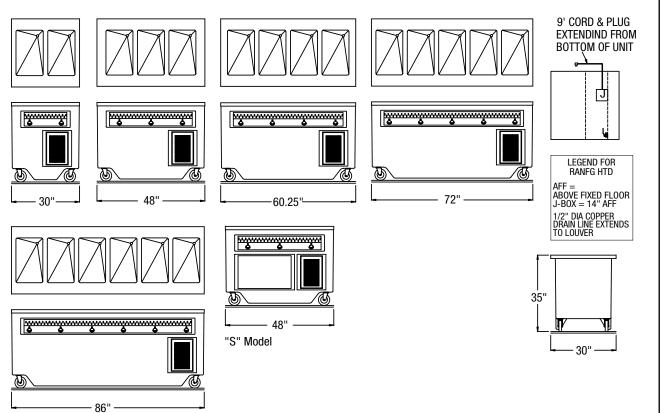

Storage Shelf Information for HTD "S" Series								
Model	Width	Height	Model	Width	Height			
14GFG HTD-3S	23"	14.5"	14GFG HTD-5S	47"	14.5"			
14GFG HTD-4S	35"	14.5"	14GFG HTD-6S	61"	14.5"			

14GFG-HTD DRAWINGS SHOWN, 14GFG HTD-S FRONT VIEW SHOWN AS REPRESENTATION OF "S" MODELS Drawings are to be viewed in the same order as the chart

Model L D	ш	No. of Wells (12x20)	120 Volt Operation		208 Volt Operation		240 Volt Operation			Ship				
Model	L	ט	Н	and/or Pans	KW	Amps*	NEMA*	KW	Amps*	NEMA*	KW	Amps*	NEMA*	Wt.
Enclosed Base (2 well not available with storage shelf due to size restraints)														
14GFG HTD-2	30"	30"	35"	(2) Wells	2.2	18.4	5-30P	2.2	10.6	6-15P	2.2	9.2	6-15P	175
14GFG HTD-3	48"	30"	35"	(3) Wells	3.3	27.6	5-50P	3.3	15.9	6-20P	3.3	13.8	6-20P	225
14GFG HTD-4	60.25"	30"	35"	(4) Wells	4.4	36.8	5-50P	4.4	21.2	6-30P	4.4	18.4	6-30P	275
14GFG HTD-5	72"	30"	35"	(5) Wells	NA		5.5	27.4	6-50P	5.5	23	6-30P	325	
14GFG HTD-6	86"	30"	35"	(6) Wells		NA		6.6	31.7	6-50P	6.6	27.5	6-50P	375
"S" Dry Storage Base														
14GFG HTD-3S	48"	30"	35"	(3) Wells	3.3	27.6	5-50P	3.3	15.9	6-20P	3.3	13.8	6-20P	250
14GFG HTD-4S	60.25"	30"	35"	(4) Wells	4.4	36.8	5-50P	4.4	21.2	6-30P	4.4	18.4	6-30P	300
14GFG HTD-5S	72"	30"	35"	(5) Wells		NA		5.5	27.4	6-50P	5.5	23	6-30P	350
14GFG HTD-6S	86"	30"	35"	(6) Wells		NA		6.6	31.7	6-50P	6.6	27.5	6-50P	400

*Amp loads for base unit with light option-adding any Heat lamps or incandescent light options will change total load and/or number of electrical cords/connections (consult factory for clarification).



