

# Reach-In Roll-In Double Door Freezer model 2268

## Description:

Randell Series 2000 Roll-Ins are built for years of efficient, high performance service. The top mounted, expansion valve refrigeration system offers the highest, most consistent performance available while maximizing usable interior space.

## Finishes:

- Standard Series Doors/Louwer:** Stainless steel.  
**Exterior Sides:** Anodized aluminum. **Interior:** Anodized aluminum
- E Series** Cabinet interior, exterior sides, fronts, and doors stainless steel.

## Specifications:

**CABINET EXTERIOR:** Cabinet body is constructed of all metal, inside & out. The top, bottom, & back are galvanized steel. Fronts and sides are available in finishes as listed above. Doors and louver are stainless steel and are removable without tools. Provided with two stainless steel removable ramps.

**CABINET INTERIOR:** Interior of cabinet is fully covered to meet N.S.F. standard #7. Solid core stainless steel interior floor is standard. The interior walls, ceiling and door liner are available in either stainless steel or anodized aluminum as listed above. Foamed in place, CFC free urethane insulation. Snap-in A.B.S. breaker strips allow access to condensate heater wires. Provided with stainless steel rack guide.

**DOORS:** Stainless steel front with either anodized aluminum or stainless steel liner, mounted on (3) heavy duty cam lift hinges with heavy duty chrome handle, and cylinder door lock.


**REFRIGERATION:** Top mounted condensing unit and evaporator coil, expansion valve system with pressure control, factory tested and balanced to maintain (0° F. to -5° F.) average interior temperature utilizing CFC free 404a refrigerant. Evaporator coil is coated to resist corrosion. Unit supplied with master on/off switch and 8' cord and plug. Access to service points without tools is standard. Provided with full automatic coil defrost with programmable timer and safety switches.



## Standard Features:

- Expansion Valve
- Digital Control
- Exterior LED Temperature Display
- Top mounted Compressor & Evaporator Coil
- C.F.C. Free R-404a Refrigerant
- Efficient Hot Gas Condensate Evaporator
- Full Automatic Coil Defrost With Programmable Timer and Safety Switches
- Cylinder Door Locks
- 8' Cord & Plug
- Main Power Supply Switch
- Self-Closing, Cam Lift Hinges with 120° Open Feature (Lifetime Warranty)
- Triple Hinged Doors
- Solid Core Stainless Steel Interior Bottom
- Fully Covered Interior meeting N.S.F. Standard #7
- Stainless Steel Interior Rack Guide
- Polyurethane Insulation
- Condensate Heaters Around All Door Openings
- Stainless Steel Removable Ramps
- Snap-In Magnetic Door Gaskets



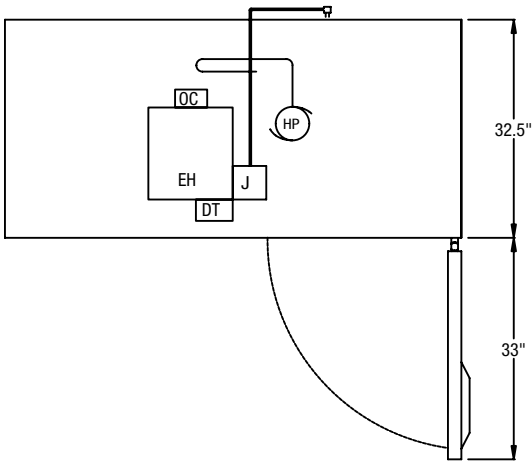

**LEGEND FOR MODEL # 2268**  
 5060 BTU/Hr

1hp COMPRESSOR  
 R404A REFRIGERANT

JUNCTION BOX  
 120/208-230V/60Hz/1Ph  
 9.7 Amps

9' LONG CORD SET  
 (NEMA 14-20P)


EVAPORATOR HOUSING

DEFROST TIMER

CONDENSATE DRAIN 1/2"

HOT GAS CONDENSATE EVAPORATOR

DESIGNED TO ACCOMMODATE  
 66"H x 26"W x 29"D RACK.  
 ACTUAL CLEARANCE DIM.  
 66.5" x 26.5" x 29.5" DEEP

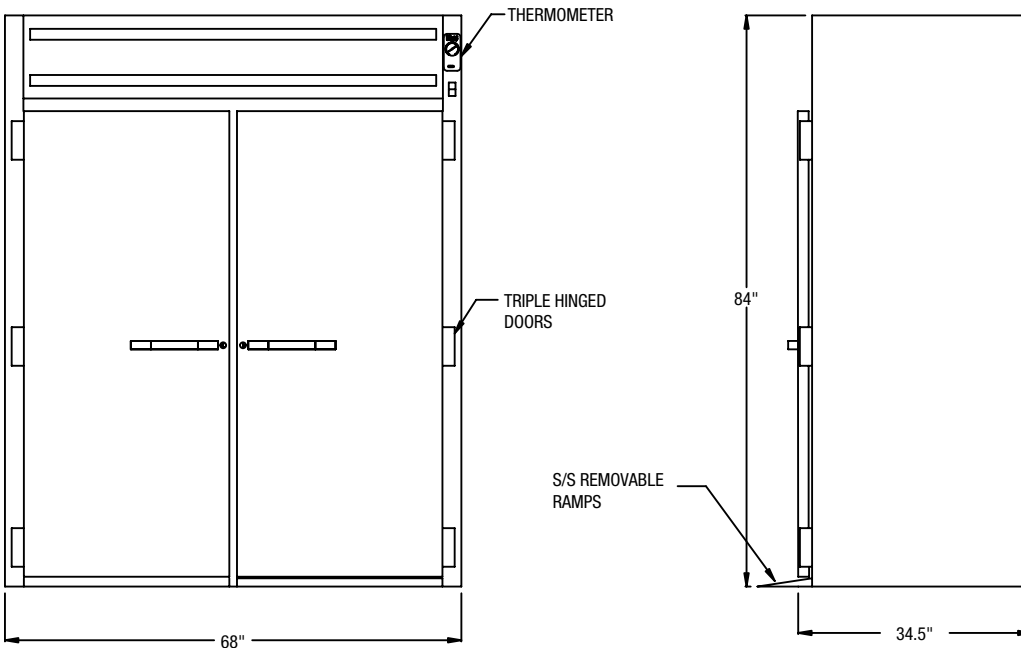

**NOTE:**  
 Unit designed to accommodate one 66" high x 26" wide x 29" deep rack.  
 Actual rack clearance dimensions: 66 1/2" high x 26 1/2" wide x 29 1/2" deep.  
 Actual door opening dimensions: 67 1/2" high x 28 1/2" wide.

FOR REMOTE MODEL  
 Use same specifications as self-contained model except for:

Model No.	Rec. H.P.	Rec. BTU/Hr.	Amp.	Ship Wt.
2268R		4895		1260

TWO SECTION ROLL-IN FREEZER

Model	L	D	H	Doors	Cu./Ft.	HP	Volt	Amps	NEMA	BTU/HR	Ship Wt.
2268 two section	68"	34 1/2"	84"	2	70.98	1	120/208-230	9.7	14-20P	3765*	1310

\* Based on 90° ambient and -10° evaporator.

