



WORKTOPS/UNDERCOUNTERS

UNDERCOUNTER

Self-contained refrigerated work top unit with back-mounted removable, replaceable, R-134a (refrigerator), R-404a (freezer) refrigeration system. "Front Breathing" refrigeration system, requires no side or back clearance. Integrated rubber bumpers provide 1" rear clearance on model 9301F-7. Model 9404-32D-7 with two refrigerated drawers in lieu of door and shelves. Stainless steel worktop, self-closing door, locking casters and cordset for 115V operation. Range from 27" to 48" long, and are 36" high. Models 9404-32-7 and 9404-32D-7 are 32.75" deep, while the others are 30" deep.

AVAILABLE MODELS:

- 9404-7
- 9404F-7
- 9404-32-7
- 9404F-32-7
- 9404F-32D-7
- 9404-32DF-7
- 9301-7
- 9301F-7

STANDARD FEATURES:

- Self-contained, removable, replaceable refrigeration package that utilizes "CFC free" R-134a refrigerant
- "Front Breathing" (on legs/casters) refrigeration system, no side or back clearance required. Integrated rubber bumpers provide 1" rear clearance on model 9301F-7.
- Fully adjustable shelves, behind self-closing stainless steel door (Model 9404-32D-7 has (2) drawers in lieu of doors)

CABINET EXTERIOR: The top, sides, and front are stainless steel. Cabinet top to be one piece die-formed 20 gauge stainless steel with 1 1/2" high square nosing. Exterior sides, and die-stamped front louver panel extend to 1/4" AFF. Bottom and back of unit are corrosion resistant steel. Door openings to be ABS and contain magnetic strip for positive sealing of gaskets. Model 9404-32-7 & 9404-32D-7 with drawer opening frames to be stainless steel with ABS breaker strips. Drawer fronts to be 24 gauge stainless steel with 16 gauge stainless handle, magnetic gasket, ABS interior liner and foamed in place insulation. Work surface to be at 36" work height with unit on standard 2 1/2" high casters (front two with locks). 9404-7 & 9301-7 with legs.

CABINET INTERIOR: Interior of cabinet is fully coved to meet N.S.F. standard #7. The Interior bottom, back, and top are anodized aluminum with coved corners for easy clean-up. The interior ends are ABS. Unit insulated with a minimum of 2.5" of CFC free, foamed in place polyurethane. Model 9404-32D-7 with two refrigerated drawers below top. Each drawer contains two 12" x 20" x 6" deep polycarbonate pans - pans are removable without removing drawer tracks. Drawer tracks are 14 gauge stainless steel with 1 5/16" stainless steel ball bearings, self-closing and removable.

DOORS: Stainless steel front with easy to grasp recessed handles, mounted on heavy duty concealed hinges. Hinges are all stainless steel with bronze pivot pin in nylon bushing, spring loaded to be self-closing. Door with foamed in place insulation, press fit magnetic gaskets - (designed for installation & removal without tools), and deep draw ABS interior liner for maximum insulation value. Model 9404-32D-7, with refrigerated drawers in lieu of door.

REFRIGERATION: CFC free, R-134a (refrigerators), R-404a (freezer) back-mounted refrigeration system to be self-contained with evaporator blower coil, compressor, thermostatic control, forced-air condensing coil and capillary tube contained in removable assembly. Condensate evaporator provided. Units totally prewired and to be supplied with 8' cordset (NEMA 5-15P) for 115V operation. "Front Breathing" refrigeration system, requires no side or back clearance. Integrated rubber bumpers provide 1" rear clearance on model 9301F-7.

ORIGIN OF MANUFACTURE: Designed and manufactured in the United States.

PROJECT NAME:

LOCATION:

ITEM NO:

QTY:

MODEL NO:

AIA NO:

SIS NO:


CSI SECTION: 11400

SHORT FORM: 9000-7 & 9404-32-7 Undercounters, Model 9404-32D-7 shown.



OPTIONS/ACCESSORIES:

- Stainless steel back panel
- Overshelves (double or single tier)
- Export voltages
- Backsplash
- Casters (9404-7 & 9301-7)

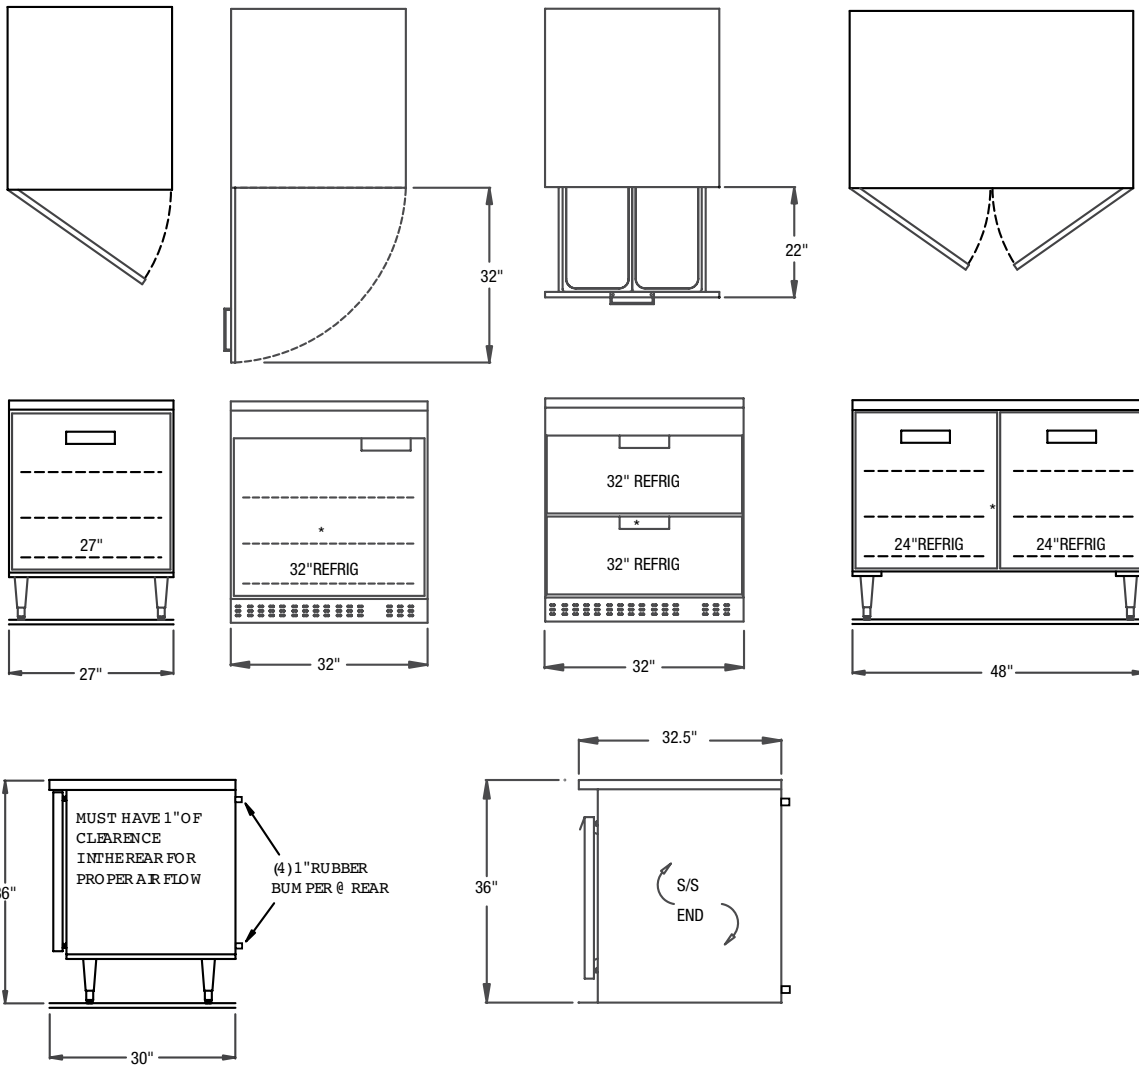

Drawings are to be viewed in the same order as the chart, one drawing to represent refrigerator and freezer units

Model	L	D	H	Doors	Storage Cu. Ft.	Pan Capacity	HP	Volt	Amps	NEMA	Ship Wt.
9404-7	27"	30"	36"	(1)27"	5.66	-	1/4	115/60/1	5.5	5-15P	190
9404F-7	27"	32.75"	36"	(1)27"	5.66	-	1/3	115/60/1	6.8	5-15P	190
9404-32-7	32"	32.75"	36"	(1)32"	8.62	-	1/4	115/60/1	5.5	5-15P	252
9404F-32-7	32"	32.75"	36"	(1)32"	8.62	-	1/2	115/60/1	8.2	5-15P	252
9404-32D-7	32"	32.75"	36"	(2)32" drawers	-	(2) 12"x20"x6" per drawer	1/4	115/60/1	5.5	5-15P	300
9404F-32D-7	32"	32.75"	36"	(2) 32" drawers	-	-	1/3	115/60/1	6.8	5-15P	300
9301-7	48"	30"	36"	(2) 24"	10.82	-	1/4	115/60/1	5.5	5-15P	265
9301F-7	48"	30"	36"	(2) 24"	10.82	-	1/2	115/60/1	8.2	5-15P	265