



## Hot Food Table/Drop-In Hot Food Well models 9570

model  9570-2  9570-3  9570-4  9570-5  9570-6

### Description:

Stainless steel, drop-in, electrically heated hot food well unit with open water bath tank, thermostatically controlled. Separate control panel for field installation, prewired.

### Specifications:

UNIT TOP: Top and water bath tank to be one piece, 16 gauge stainless steel.

UNIT BODY: Unit fitted with electric heating element(s) mounted beneath tank, insulated and shielded. Unit prewired to controls, mounted on separate stainless steel panel. 1" stainless steel drain nipple and gate valve provided. Fully insulated exterior body of corrosion resistant steel.

CONTROLS: Controls prewired to junction box mounted on separate stainless steel panel for field installation in counter front. Connections to heating elements to be located outside of heated zone to avoid wiring deterioration. 208/240V operation.

### Standard Features:

- Open tank Baine Marie style for wet operation
- True thermostatic control for precise food temperatures
- Drain and gate valve
- Approved for installation in either stainless or laminate counter work

### Options & Accessories:

- Adaptor bars
- Extended thermostatic lead

model 9570-2 shown




**LEGEND FOR MODEL # 9570-2**

J JUNCTION BOX  
HARDWARE CONNECTION

(1) ELEMENT, 3000 WATTS  
CHOOSE ONE:

208V/60Hz/1Ph/14.4Amps  
 240V/60Hz/1Ph/12.5Amps

D 1" DIA DRAIN LINE CONNECTION  
T FPT AT 24" AFF

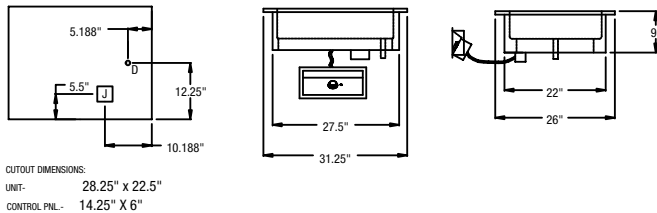


**LEGEND FOR MODEL # 9570-3**

J JUNCTION BOX  
HARDWARE CONNECTION

(1) ELEMENT, 3000 WATTS  
CHOOSE ONE:

208V/60Hz/1Ph/14.4Amps  
 240V/60Hz/1Ph/12.5Amps

D 1" DIA DRAIN LINE CONNECTION  
T FPT AT 24" AFF

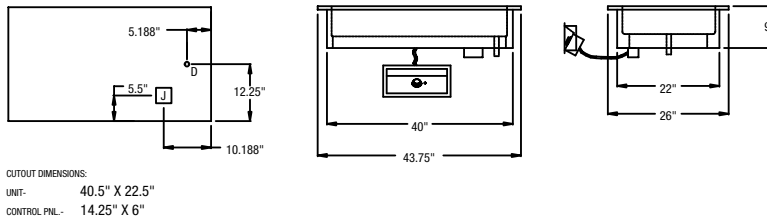


**LEGEND FOR MODEL # 9570-4**

J JUNCTION BOX  
HARDWARE CONNECTION

(2) ELEMENTS, 6000 WATTS  
CHOOSE ONE:

208V/60Hz/1Ph/28.8Amps  
 240V/60Hz/1Ph/25.0Amps

D 1" DIA DRAIN LINE CONNECTION  
T FPT AT 24" AFF

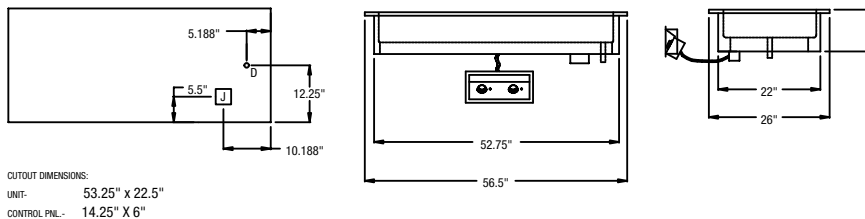


**LEGEND FOR MODEL # 9570-5**

J JUNCTION BOX  
HARDWARE CONNECTION

(2) ELEMENT, 6000 WATTS  
CHOOSE ONE:

208V/60Hz/1Ph/28.8Amps  
 240V/60Hz/1Ph/25.0Amps

D 1" DIA DRAIN LINE CONNECTION  
T FPT AT 24" AFF

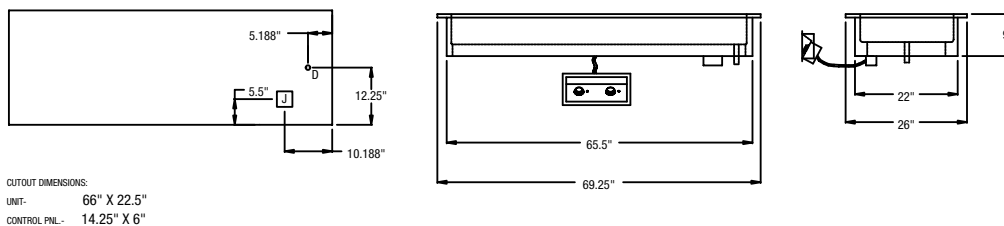


**LEGEND FOR MODEL # 9570-6**

J JUNCTION BOX  
HARDWARE CONNECTION

(2) ELEMENT, 6000 WATTS  
CHOOSE ONE:

208V/60Hz/1Ph/28.8Amps  
 240V/60Hz/1Ph/25.0Amps

D 1" DIA DRAIN LINE CONNECTION  
T FPT AT 24" AFF

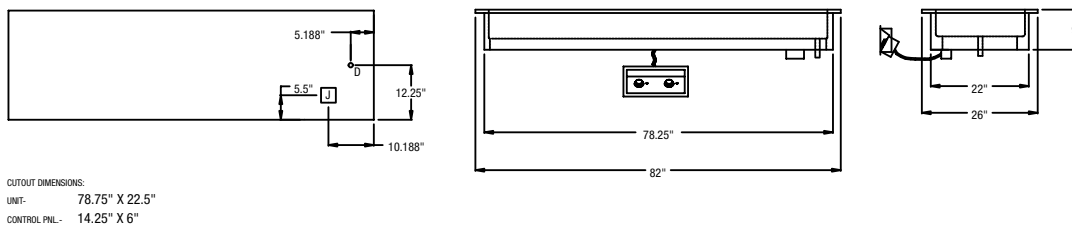

Model	L	D	12"x20" Pan Cap.	Cut Out Size		No. of Elements	Watts	Amps / 60 / 1 PH		Ship Wt.
				Unit	Control Panel			208V	240V	
9570-2	31 1/8"	26"	2	28 1/4" x 22 1/2"	14" x 6"	1	3000	14.4	12.5	110
9570-3	43 5/8"	26"	3	40 1/2" x 22 1/2"	14" x 6"	1	3000	14.4	12.5	135
9570-4	56 1/2"	26"	4	53 1/4" x 22 1/2"	14" x 6"	2	6000	28.8	25	160
9570-5	69 1/4"	26"	5	66" x 22 1/2"	14" x 6"	2	6000	28.8	25	185
9570-6	82"	26"	6	78 3/4" x 22 1/2"	14" x 6"	2	6000	28.8	25	210

Power supply requires hard wiring to "J" box.



Component