

RANDELL®

RanServe Stainless Steel Freezer/Plate Chiller models FRA

model RAN FRA-1 RAN FRA-2

Description:

Portable, stainless steel self-contained freezer/plate chiller. Foamed in place (CFC free) polyurethane insulation. Interchangeable stainless steel or laminate body panels, snap together locking device designed to work with all other RanServe equipment. (4) swivel casters provided along with cordset. R-404a refrigerant, "CFC free".

Specifications:

UNIT TOP: Top to be one piece of die-formed 16 gauge stainless steel with 1 1/2", 90° nosing on all sides. Unit fitted with a self-contained freezer/plate chiller. Top to have opening with raised rim, fitted with removable, hinged, insulated lid(s).

UNIT BODY: Body frame to be all welded construction of steel with exposed corners to be 1 1/2" stainless steel. All corners welded and polished. Body ends and panels to be plastic laminate with galvanized steel backing (specify laminate color). Body ends and panels to be removable to allow the changing of colors. Interior to be stainless steel, with coved corner construction for easy cleaning. Insulation to be high density (CFC free) polyurethane, foamed in place. Unit interior sides wrapped with refrigerating lines held firmly in place with holding clips welded to unit body. Unit to be equipped with 4 swivel casters, (2) locking, that are recessed inside of toe area.

REFRIGERATION: CFC free, R-404a refrigeration system to be wrapped refrigeration construction. Condensing unit, expansion valve, and thermostatic control for operator adjustability mounted in compressor housing. 8' cordset (NEMA 5-15P) supplied for 115V operation.

This equipment is intended for use in rooms having an ambient temperature of 86°F (30°C) or less.

model RAN FRA-2 shown









Standard Features:

- Coved corner interior
- Stainless steel top with insulated hinged covers - clear plexi covers available
- R-404a refrigerant, "CFC free"
- Foamed in place (CFC free) polyurethane insulation
- Interchangeable body panels
- Concealed locking mechanism with easy to use spring-activated catch
- Suitable for ice cream, frozen foods, plate and mug chilling
- Swivel casters - (2) locking


Options & Accessories:

- Canopy
- Overshelves
- Trayslides
- Corian top
- Granite top
- Laminates
- Graphics
- Sneeze Guards
- Elementary School Height
- Electrical Distribution System



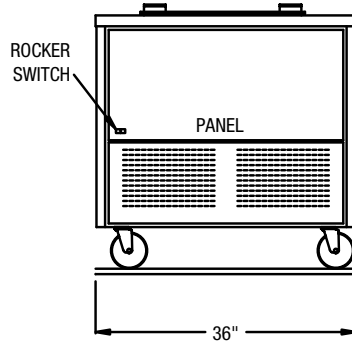

LEGEND FOR MODEL # RAN FRA
 AFF = ABOVE FIXED FLOOR
 HP HP COMPRESSOR
 JUNCTION BOX 14" AFF.
 115V/60Hz/1PH
 9' CORD NEMA #5-15P
 CU FT STORAGE
 GALLON CAPACITY



Drawings are to be viewed in the same order as the chart

Model	L	D	H	Storage Cu. Ft.	Gallon Capacity	H.P.	Volts	Amps	NEMA	Ship Wt.
RAN FRA-1	24"	30"	35"	1.8	6	1/3	115/60/1	6.3	5-15P	200
RAN FRA-2	36"	30"	35"	3.6	12	1/3	115/60/1	6.3	5-15P	230

