

Serving Lines, Fiberglass Ice Cooled Cold Pan models IC

model

□ RANFG IC-2 □ RANFG IC-3 □ BANFG IC-3S □ BANFG IC-4S

□ RANFG IC-4

□ RANFG IC-5S

□ RANFG IC-5 □ RANFG IC-6 □ RANFG IC-6S

Description:

Randell's RANFG IC Series Ice Cooled Pan Units designed for virtually any cold food serving application, the RANFG IC series is enclosed in brilliant one-piece fiberglass body and 16 gauge stainless steel top.

Specifications:

CABINET CONSTRUCTION: One-piece molded fiberglass body for smooth exterior finish. All corners and areas where accessories are mounted are reinforced internally with metal backers.

TOP CONSTRUCTION: Exterior top is standard in reinforced 16 gauge 300 series stainless steel with #4 finish. Optional 14 gauge tops available at a minimal upgrade.

ICE WELL CONSTRUCTION: The ice pans are constructed of die formed stainless steel and are provided with a drain and a gate valve. The gate valve is accessed through the louvered access door. Draining is accomplished by setting a bucket in front of the door and opening valve (simple and easy-eliminates floor drain requirements).

This equipment is intended for use in rooms having an ambient temperature of 86°F (30°C) or less.

Standard Features:

- · Hinged access to drain gate valve
- Concealed locking mechanism with easy to use springactivated catch

Additional Available Configurations:

RANFG IC "S" Series

Same basic construction of standard enclosed base series with an optional open shelf storage compartment. Available in the 4, 5 & 6 pan models to offer most efficient space capacity.

model RANFG IC-6S shown with optional kick plate



Available Fiberglass Colors:

- Pitch Black
- Dark-Bark Brown
- □ Cabernet Wine
- British Racing Green
- □ Tin Man Gray
- True Blue
- □ Light Sky Blue
- Candy Apple Red
- **Tiger Lilly Orange** Canary Yellow
- White

Options & Accessories:

- Canopy □ Overshelves Trayslides Corian top Granite top Kick Plate Graphics
- □ Sneeze Guards
- Elementary School Height
- Electrical Distribution System

Randell Serving Lines, Page 29 PP SPEC0109 Rev. B Revised 10/09


33°F to 41°F



 \mathbb{Q}

72

unified bro

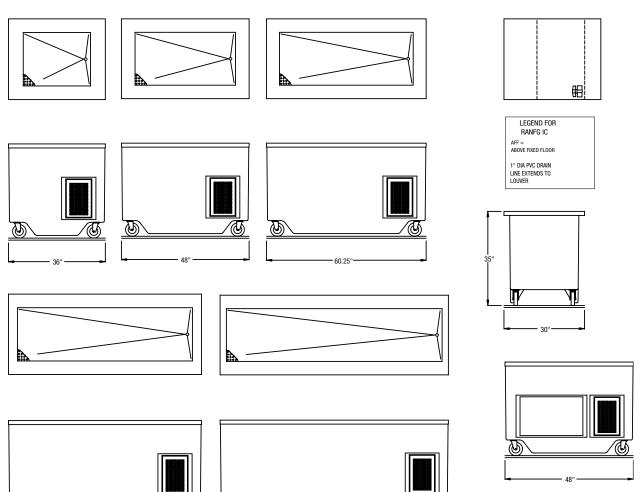

86

RANFG-IC DRAWINGS SHOWN, RANFG IC-S FRONT VIEW SHOWN AS REPRESENTATION OF "S" MODELS Drawings are to be viewed in the same order as the chart

 \mathbb{Q}

COMMON DATA FOR IC SERIES (INCLUDES THE STANDARD IC SERIES AND THE"S" STORAGE BASE SERIES)							
Model	L	Тор	Work		No). Of	
	(A)	Depth	Hei	ght	12x2	20 wells	Ship Wt.
RANFG IC-2	36"	30"	3	35"		2	250
RANFG IC-3(S)	48"	30"	3	35"		3	300
RANFG IC-4(S)	60.25"	30"	3	85"		4	350
RANFG IC-5(S)	72"	30"	3	85"		5	400
RANFG IC-6(S)	86"	30"	3	5"		6	450
STORAGE SHELF INFORMATION FOR IC "S" SERIES 2 & 3 pan not available with storage shelf (too small)							
Model	L(A)	W(W(B)		C)	Ship Wt	
RANFG IC-3S	48"	48" 21		14.5"		275	
RANFG IC-4S	60.25	" 33.	.5" 14		.5"	325	
RANFG IC-5S	72"	2" 45		14.5"		375	
RANFG IC-6S	86"	6" 59		14.5"		425	

A DOVER COMPANY



"S" Model