

DCH Heated Display Cabinet



DCH-300



DCH-200

Sell product fast by attractively displaying it to customers. The Heated Display Cabinet keeps products well lit and has an easy-to-change menu board for added flexibility.

The digital display thermostat and electronic controls ensure product is held safely. Models are available with a low-temperature range for pastries and pretzels and a high-temperature range for protein-based products.


Features

- Bright, full-length lighting.
- Digital display thermostat and electronic controls.
- European design with curved, tempered glass.
- Easy-to-change menu board.
- Stainless steel construction for long life.



DCH Heated Display Cabinet

Dimensions

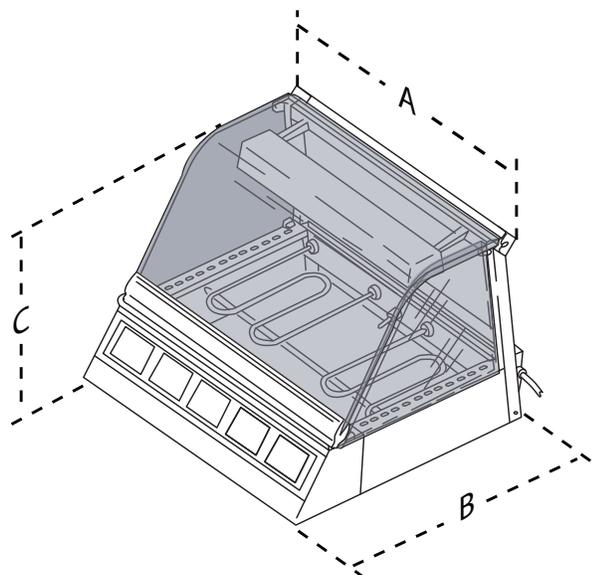

Model No.	Width (A)	Depth (B)	Height (C)
DCH-300	42 1/2"	31 1/4"	22"
DCH-320	(1080 mm)	(794 mm)	(559 mm)
DCH-200	30 1/4"	31 1/4"	22"
DCH-220	(768 mm)	(794 mm)	(559 mm)

Electrical Ratings and Plug Configuration

Model & Mfg. No.	Volts	Watts	Amps	Hertz	Plug Description
DCH-300 9500540	120	1800	15	50/60	NEMA 5-20P 20 Amp., 120 Volt
DCH-320 9500550	120	1800	15	50/60	NEMA 5-20P 20 Amp., 120 Volt
DCH-200 9500520	120	1760	14.7	50/60	NEMA 5-20P 20 Amp., 120 Volt
DCH-220 9500530	120	1760	14.7	50/60	NEMA 5-20P 20 Amp., 120 Volt

Specifications

Model No.	Temperature Ranges
DCH-300 DCH-200	150°F to 165°F (66°C to 74°C)
DCH-320 DCH-220	100°F to 165°F (38°C to 74°C)

Accessories

Units are not supplied with pans or transparencies. A wire rack is available to allow for two levels of display. The pan adaptor allows for a 4" deep steam table pan.

P/N 1020219 Rev. G 03/13