Scotsman[®]



C2648 – 2600 lb Cube Ice Machine

Prodigy® Modular Cube Ice Maker

PRELIMINARY



Features

Prodigy® cubers use significantly less energy and water than other cube ice machines, exceeding California and Federal energy efficiency regulations.

AutoAlert™ indicator lights constantly communicate about operating status and actually signal your staff when it's time to descale, sanitize, and more making upkeep practically foolproof.

The patented WaterSense adaptive purge control delivers maximum reliability by reducing scale buildup for a longer time between cleanings.

Preventative maintenance is simpler than ever with easily-removed panels allowing clear access to internal components and a diagnostic code display insuring the right fix the first time.

All external panel components are crafted for optimal aesthetic appeal through superior fit and finish.

An optional advanced feature Smart-Board™ provides NAFEM data protocol and additional operational data that can be displayed on-screen or transmitted remotely, resulting in early alert and fast diagnosis of operating issues.

An optional Vari-Smart™ ultrasonic ice level control sensor allows you flexibility to program ice levels, for up to 7 days, keeping just the right amount of freshly made ice in the bin.

24 Hour Volume Production

	70°F/21°C 50°F/10°C lb/kg	Air Water	AHRI 90°F/32°C 70°F/21°C lb/kg	-
C2648MR-3A	2570/1168		2256/1025	
C2648SR-3A	2570/1168		2224/1011	













NAFEM DATA PROTOCOL



AHRI Certified Bin Capacity lb/kg Application Capacity Ship Weight lb/kg Dimensions W" x D" x H" lb/kg Finish 1755/796 SS w/ GBB' 370/168 60 x 34 x 62 1375/624 370/168 60 x 34 x 62 1375/624 1755/796 SS



Modular Bin Options

Model

BH1600BB

BH1600SS

Bin: BH1600SS

Cube Ice



Small Cube 7/8" X 7/8" X 3/8" (2.22 x 2.22 x .95 cm)



Common

ideal for mixed

Medium Cube 7/8" X 7/8" X 7/8" (2.22 x 2.22 x 2.22 cm)


Warranty

* Stainless Steel with Galvanized Back & Bottom.

- 3 years parts and labor on all components.
- 5 years parts and labor on the evaporator.
- 5 years parts on the compressor and condenser.

Warranty valid in North, South & Central America. Contact factory for warranty in other regions.

Scotsman[®]

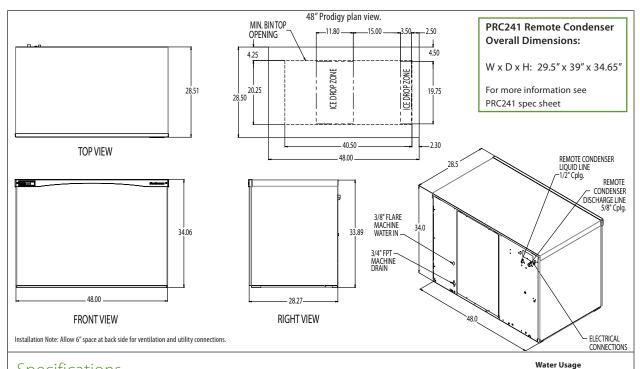

Chacifications

Specification	ons						Gallons/100 lb	(liters/45.4 kg)
Model Number* Cube Size: medium or small	Condenser Unit	Basic Electrical Volts/Hz/Phase	Max. Fuse Size or HACR Circuit Breaker (amps)	Circuit Wires	Min. Circuit Ampacity	Energy Consumption kWh/100 lb (45.4 kg) 90°F(32°C)/70°F(21°C)	Potable 90°F(32°C)/ 70°F(21°C)	Condenser 90°F(32°C)/ 70°F(21°C)
C2648MR-3A	Remote	208-230/60/3	30	3	21.6	4.34	17.0/64.4	-
C2648SR-3A	Remote	208-230/60/3	30	3	21.6	4.50	17.7/67.1	-

= ENERGY STAR®

All Models

Dimensions (W x D x H): Unit:

48" x 28.5" x 34" (121.9 x 72.39 x 86.36 cm)

Shipping Carton:

53.75" x 32.75" x 40" (136.5 x 83.2 x 101.6 cm)

Shipping Weight:

430 lb / 195 kg

BTUs per hour:

31,600

Accessories

Model Number	Description
KVS	Vari-Smart™ Ice Level Control - Program ice bin levels to match ice needs.
KSBU	Smart-Board™ Advanced Control - Use additional operational data for fast diagnosis.
KSBU-N	Smart-Board [™] Advanced Control with Network - Network capable.
PRC241-32A	Remote Condenser for C2648xR, 208-230/60/1
RTEL25	Line set, Precharged, R-404A, 25ft.
RTEL40	Line set, Precharged, R-404A, 40ft.
RTEL75	Line set, Precharged, R-404A, 75ft.

^{*} Scotsman recommends all ice machines have water filtration. See Scotsman Water Filter Spec Sheet for details.

Operating Requirements

	Minimum	Maximum
Air Temperatures	50°F (10°C)	100°F (38°C)
Water Temperatures	40°F (4.4°C)	100°F (38°C)
Remote Cond. Temps	-20°F (-29°C)	120°F (49°C)
Water Pressures	20 PSIG (1.4 bar)	80 PSIG (5.5 bar)
Electrical Voltage	-5%	+10%

Specifications and design are subject to change without notice.

Scotsman Ice Systems 775 Corporate Woods Parkway Vernon Hills, IL 60061

1-800-SCOTSMAN Fax: 847-913-9844

E-mail: customer.service@scotsman-ice.com

www.scotsman-ice.com

© 2010 Scotsman Ice Systems. SIS-SS-PRD-C2648 11-10