

FOOD WARMERS: FOOD SERVERS SINGLE WELL

Model FS-4+, FS-7 & FS-11











ALSO AVAILABLE FOR EXPORT

TWO YEAR WARRANTY

Server Products equipment is backed by a two-year limited warranty against defects in materials and workmanship. For a copy of our complete warranty statement, please refer to server-products.com.

BID DESCRIPTION

The round series of water bath warmer/cookers is constructed of stainless steel with a polished finish. Inset and lid assemblies are included. The lid stays upright during ladling and features a rim that collects moisture and returns it to the food.

An adjustable precalibrated thermostat controls the heating element. Temperature settings marked on thermostat knob —range from 100° F (38° C) to 200° F (93° C) on FS-4+. FS-7 and FS-11 range from 60° F (16° C) to 200° F (93° C).

FS-4+ has a 5 quart (4.7 L) capacity with 500 watts. Power is controlled with an ON/OFF rocker switch.

FS-7 has a 7 quart (6.6 L) capacity with 1000 watts. FS-11 has an 11 quart (10.4) capacity with 1500 watts. Power is controlled with a positive ON/OFF thermostat for both the FS-7 and FS-11.

STANDARD FEATURES

- NSF-certified as a rethermalization unit
- · Water fill line eliminates overflow accidents
- Adjustable thermostat for accurate heat control
- Temperature marks on knob with protective knob guard
- Inside lid rim returns moisture to the food to retain flavor
- Hinged lid stays upright during ladling for easy use
- Handle on FS-7 & FS-11 assists in opening larger lids ergonomically—no more reaching over hot zone

ACCESSORY ITEMS


5 qt (4.7 L) Inset & Lid Assembly 81111
7 qt (6.6 L) Inset & Lid Assembly 84040
11 qt (10.4 L) Inset & Lid Assembly 84149
2 oz (59 mL) Ladle 82660
4 oz (118 mL) Ladle 82574
6 oz (177 mL) Ladle 82661
8 oz (237 ml.) Ladle 82662



FOOD WARMERS: FOOD SERVERS SINGLE WELL

Model FS-4+, FS-7 & FS-11

FOOD SERVER/COOKER SERIES

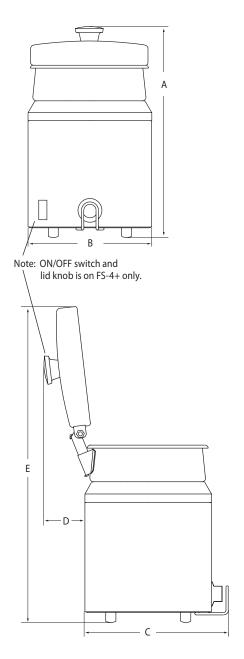

MODELS	FS-4+	FS-7	FS-11	
	81000 ™	84000 ℃	84100 &	
Capacity	5 qt	7 qt	11 qt	
	4.7 L	6.6 L	10.4 L	
A-Height	14 ⁹ / ₁₆ "	14 ³ / ₁₆ "	14 ¼"	
	37 cm	36 cm	36.1 cm	
B-Width	7 ¾"	9 ⁹ / ₁₆ "	11 ⁹ / ₁₆ "	
	19.7 cm	24.3 cm	29.4 cm	
C-Depth	8 ³ / ₁₆ "	11"	13"	
	22.4 cm	27.9 cm	33 cm	
D-Depth	2 ½"	2 ³ / ₁₆ "	2 ³ / ₁₆ "	
	6.4 cm	5.6 cm	5.6 cm	
E-Height	20 ¹ / ₁₆ "	22 ⁹ / ₁₆ "	24 ⁹ / ₁₆ "	
	51 cm	57.3 cm	62.4 cm	
Electrical	500 W	1000 W	1500 W	
	4.1 A	8.3 A	12.5 A	
Electrical	120V, 60Hz, 72" (183 cm) cord set NEMA 5-15P, 15A, 125V PLUG			
Weight	9 lb	13 lb	16 lb	
	4.1 kg	5.9 kg	7.3 kg	

FOB RICHFIELD, WISCONSIN 53076

NSF LISTED AS A RETHERMALIZATION UNIT TO ENSURE FOOD IS QUICKLY HEATED TO A SAFE TEMPERATURE BEFORE BACTERIA HAS AN OPPORTUNITY TO GROW. &

CAD LIBRARY

Individual CAD images can be downloaded from our website. We are also a member of The KCL CADalog with more than 100 other manufacturers. Our complete collection of CAD files can be purchased through Kochman Consultants, Ltd. at kclcad.com.

