

SLIMLINE DROP-IN SEALED WELL ELECTRIC UNIT



DISLSW-3-120 Shown

Item #:	_____	Qty #:	_____
Model #:	_____		
Project #:	_____		

FEATURES:

- Fiberglass insulation between each compartment
- 12" x 20" die stamped openings
- Full stainless steel construction inside and out.
- Remote control panel
- Units are supplied with drains for wet or dry application
- Drains with gate valves per well

MATERIAL:

- TOP:** 18 gauge #304 stainless steel with die stamped pan openings and self rimmed. (12" x 20" opening)
- BODY:** 20 gauge galvanized



ELECTRICAL:

- 120V units yield 1100 Watts
- 208V/240V dual voltage units yield 825 Watts at 208V and 1100 Watts at 240V
- 6' electrical cord with plug
- Infinite control knobs
- Indicator lights
- Unit to be hard wired in the field. Optional cord sets available, please consult the factory for more information**

Model #	Length (L)	Unit Cut-Out Size	# of Wells	Wt	Cubic Feet	Volts	Power Consumption
DISLSW-2-120	47.5625"	15-1/8" x 45-7/8"	2	130	23	120	20/1100
DISLSW-3-120	70.375"	15-1/8" x 68-3/4"	3	150	33	120	50/1100
DISLSW-2-240	47.5625"	15-1/8" x 45-7/8"	2	130	23	208/240	20/825 • 20/1100
DISLSW-3-240	70.375"	15-1/8" x 68-3/4"	3	150	33	208/240	20/825 • 20/1100
DISLSW-4-240	93.1875"	15-1/8" x 91-1/2"	4	170	43	208/240	20/825 • 20/1100

NOTE: Units are not designed to cook or heat frozen or refrigerated foods. Food placed in tables should already be hot, and the table will maintain the proper temperatures

Upgrade Options:



- Manifold Drains (Shown Above) - Add suffix **-M**
- Thermostatic Controls - Add suffix **-T**

Accessories:

- Buffet Shelf - **Models TBS - (2-5)**
- Serving Shelf - **Models TSS-(2-5)**




CONSULT FACTORY FOR SNEEZE GUARDS

 <p>ADVANCE TABCO SMART FABRICATION™ www.advancetabco.com</p>	Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T.	
	For Orders: Email: customer@advancetabco.com or Fax To: 631-242-6900	For Smart Fabrication™ Quotes: Email: smartfab@advancetabco.com or Fax To: 631-586-2933

DIMENSIONS and SPECIFICATIONS

TOL ± .125"

ALL DIMENSIONS ARE TYPICAL

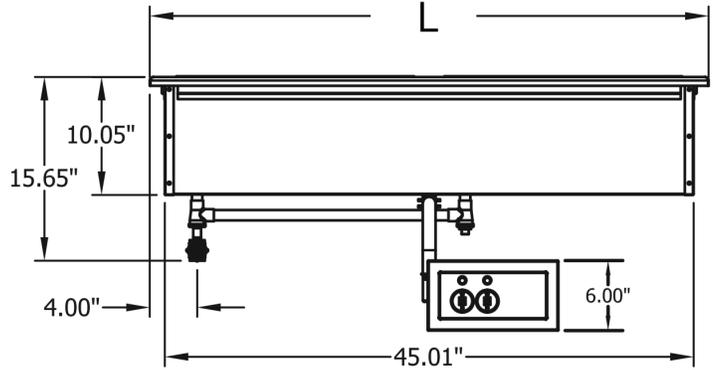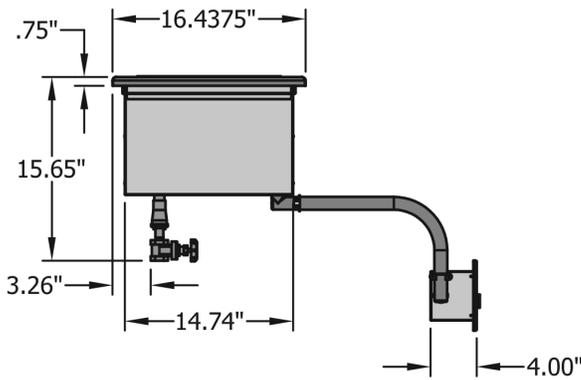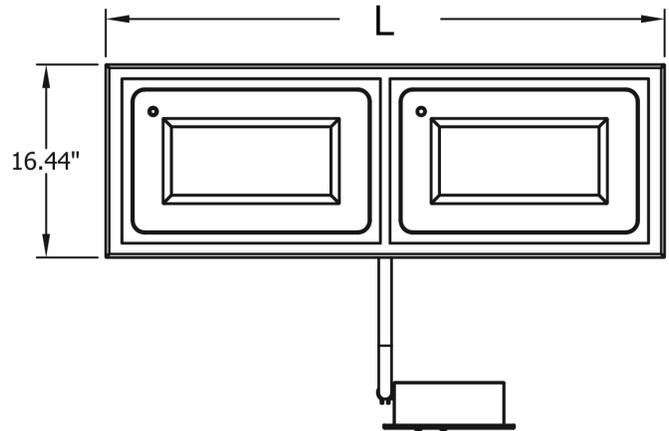

CONTROL PANEL SPECS

Model #	Cut-Out Size Length (A)	Cut-Out Size Height (B)	Front Panel Length (C)
DISW-2	9 -1/2"	4 -5/16"	11 -1/8"
DISW-3	15 -3/8"	4 -5/16"	17"
DISW-4	15 -3/8"	4 -5/16"	17"

Unit to be hard wired in the field. Optional cord sets available, please consult the factory for more information

