



500-1D 500-2D 500-3D

DRAWER WARMERS



500-1D



500-3D



500-2D



• HALO HEAT . . . a controlled, uniform heat source that gently surrounds foods for better appearance, taste, and longer holding life.

- Product moisture is retained without adding water.
- Digital control senses temperature drops faster, providing quick heat recovery time.
- Extra large pans for additional capacity, or can be adapted to accept standard full-size pans.
- Can be built into cabinets or counters. Built-in trim kits are available.
- Stackable design.

Exterior of 20 gauge non-magnetic stainless steel with one set of removable 16 gauge stainless steel drawer rail supports per drawer. Each cabinet is controlled by one (1) ON/OFF power switch; Up and Down Arrow Keys with a temperature range of 60° to 200°F (16° to 93°C); heat indicator light; temperature display key, and digital display. Each drawer includes one (1) 12" x 20" x 6" (305mm x 508mm x 152mm) stainless steel pan. The drawer assembly is easily adapted to accept an oversized 15" x 20" x 5" (381mm x 508mm x 127mm) pan for greater capacity. Drawer warmers are designed with four (4) stacking projections, located on the top of each cabinet, to allow stacking in any combination without the need of additional hardware. Individual drawer warmers, or stacked combinations, can be mounted on 3" (76mm) or 5" (127mm) Caster Stand Assembly for mobility, or a 6" (152mm) Leg Stand Assembly for stationary placement.

- MODEL 500-1D:** One drawer warmer

- MODEL 500-2D:** Two drawer warmer

- MODEL 500-3D:** Three drawer warmer



ANSI/NSF 4



FACTORY INSTALLED OPTIONS

- Electrical Choices
 - 120V
 - 208-240V
 - 230V
- Drawer Choices
 - Non-Vented, Standard
 - Vented, Optional (5014559)

ADDITIONAL FEATURES

- Stack units without additional hardware
- Individual or stacked units can be mounted on:
 - 3" (76mm) Casters and Caster Stand Assembly
 - 5" (127mm) Casters and Caster Stand Assembly
 - 6" (152mm) Leg Stand Assembly



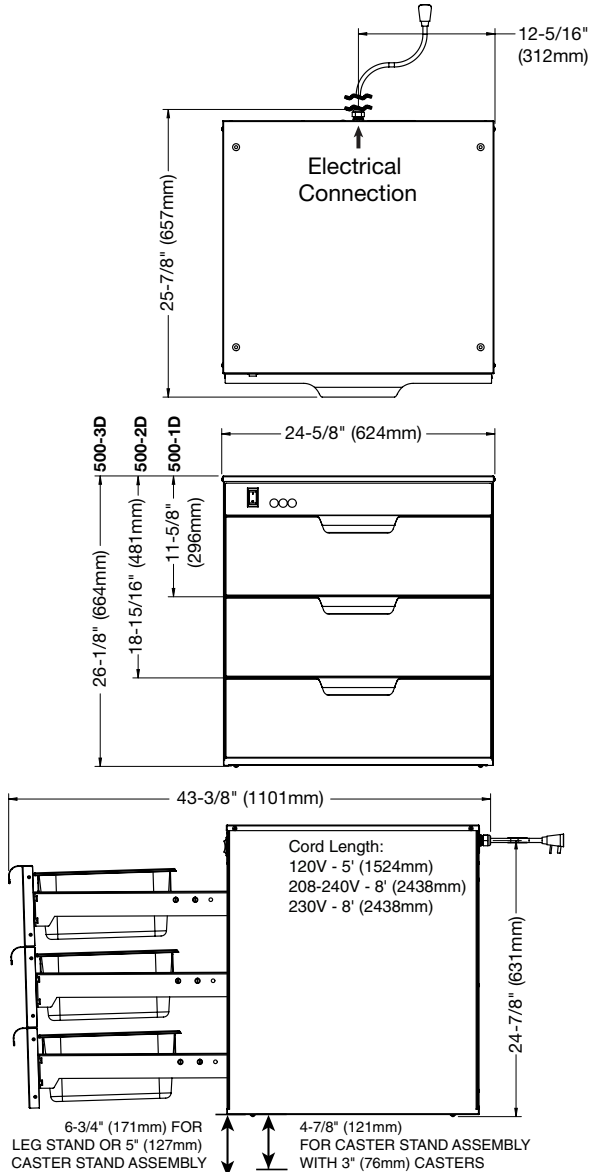
W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A.

PHONE: 262.251.3800 800.558.8744 U.S.A./CANADA FAX: 262.251.7067 800.329.8744 U.S.A. ONLY




www.alto-shaam.com

500-1D, 500-2D, 500-3D

DRAWER WARMERS



DIMENSIONS H X W X D	
500-1D EXTERIOR:	11-5/8" x 24-5/8" x 25-7/8" (296mm x 624mm x 657mm)
500-2D EXTERIOR:	18-15/16" x 24-5/8" x 25-7/8" (481mm x 624mm x 657mm)
500-3D EXTERIOR:	26-1/8" x 24-5/8" x 25-7/8" (664mm x 624mm x 657mm)
Pan size: (EACH DRAWER) 12" x 20" x 6" (305mm x 508mm x 152mm) GN 1/1	
CUT OUT DIMENSIONS: (FOR UNITS WITH BUILT-IN TRIM) Add 3/4" (19mm) to unit height and 1-1/2" (38mm) to unit width	

ELECTRICAL						
VOLTAGE	PHASE	CYCLE/HZ	AMPS	kW		
120	1	60	5.3	0.64		NEMA 5-15P 15A, 125V PLUG
208-240	1	60	2.7	0.64		NEMA 6-15P 15A, 250V PLUG
230	1	50	2.6	0.59		CEE 7/7, 220-230V PLUG

PRODUCT CAPACITY	
36 lbs (16 kg) MAXIMUM • EACH DRAWER (34 BAKED POTATOES, 50 DINNER ROLLS)	

WEIGHT (EST.)			
	500-1D	500-2D	500-3D
NET	80 lb (36 kg)	115 lb (52 kg)	150 lb (68 kg)
SHIP	90 lb (41 kg)	125 lb (57 kg)	165 lb (75 kg)
CARTON DIMENSIONS: (L X W X H)			
	30" x 27" x 16" (762mm x 686mm x 406mm)	30" x 27" x 23" (762mm x 686mm x 584mm)	30" x 27" x 30" (762mm x 686mm x 762mm)

INSTALLATION REQUIREMENTS	
Drawer warmer must be installed level, and must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.	

CLEARANCE REQUIREMENT (FOR VENTILATION)	
Minimum: 3" (76mm) at the back, 2" (51mm) at the top, and 1" (25mm) at both sides. On-site venting for proper airflow must also be provided for built-in counter installations.	

OPTIONS & ACCESSORIES	
Built-in Trim Kit	
<input type="checkbox"/> 500-1D	5015147
<input type="checkbox"/> 500-2D	5015149
<input type="checkbox"/> 500-2D for BU2-48, BU2-72	5015151
<input type="checkbox"/> 500-2D for BU2-96	5015152
<input type="checkbox"/> 500-3D	5015153

Caster Stand Assembly	
<input type="checkbox"/> with 5" (127mm) casters	15379
<input type="checkbox"/> with 3" (76mm) casters	5010920
<input type="checkbox"/> Leg Stand Assembly	15380
<input type="checkbox"/> Pan, oversize, 15" x 20" x 5" (381 x 508 x 127mm)	PN-2123
Perforated Pan Grid	
<input type="checkbox"/> 15" x 20" (381mm x 508mm)	1231
<input type="checkbox"/> 12" x 20" (305mm x 508mm)	16642