



# COMBITHERM®

## CTP20-10E

### ELECTRIC BOILER-FREE

#### CAPACITY

- Twenty (20) full-size or GN 1/1 pans; twenty (20) half-size sheet pans; one row deep
- Roll-in pan cart with twenty (20) non-tilt support rails; 13" (330mm) horizontal width between rails, 2-9/16" (65mm) vertical spacing between rails

#### CONSTRUCTION

- Stainless steel exterior, bright annealed interior
- Seamless welded interior stainless steel cavity
- CoolTouch3™ triple pane window door with hinged inner glass prevents additional heat loss and increases cooking efficiency
- Door is hinged right with a 130° swing
- High efficiency LED lighting integrated in the door

- Hands free positive catch door handle with lighted visual alerts [PATENT PENDING]
- PROrinse™ ergonomic retractable hand shower includes a safety shutoff interlock that shuts off water to the hose when fully retracted [PATENT PENDING] and a built-in backflow preventer
- SafeVent™ provides automatic steam venting at the end of the cooking cycle [PATENT #7,282,674]
- Zero Clearance system maximizes floor space utilization with features that carefully protect temperature sensitive components and controls [PATENT PENDING]
- Adjustable stainless steel flanged legs provide stability
- Roll-in pan cart includes mounted drip tray and four (4) swivel casters, including two (2) with brakes

#### CT PROFORMANCE™ STANDARD FEATURES

- Oven with state-of-the-art innovative solutions that meld together perfectly to deliver the highest performance standards, consistent food quality, and production efficiency.
- PROtouch™ control provides a simple and intuitive touch screen interface, large screen display and icons that are easy to use and identify.
- Software operation in English, French, German, Korean, Mandarin, Russian, or Spanish.
- Four cooking modes:  
Steam - 85°F to 250°F (30°C to 120°C)  
Convection - 85°F to 575°F (30°C to 300°C)  
Combination - 212°F to 575°F (100°C to 300°C)  
Retherm - 245°F to 320°F (120°C to 160°C)
- Cook time is displayed in hours : minutes : seconds for greater precision.

- Access an unlimited number of programmed titled recipes that you've customized, marked as favorites, or placed into category folders.
- Removable, single-point, quick-connect, core temperature product probe.
- Two power levels: reduced power to manage kitchen power peaks, and eco power for optimal oven efficiency.
- Absolute Humidity Control™ (AHC) provides 0 - 100% humidity levels allowing more control over the ideal cooking environment and product finish [PATENT PENDING].
- Auto-reversing fan with five different fan speeds expands cooking capabilities - from braising, roasting, to flow sensitive products such as soufflés and meringues, or any product affected by a high velocity of air movement.
- Moisture injection feature provides perfect sheen and crust on breads and pastry items.
- Auto-detect USB for HACCP data access, Recipe Management, and software updates.
- Multi-shelf timers can be labeled by product name and programmed in hours, minutes and seconds giving greater control for delicate items.
- Sleep mode can be used to save valuable time by eliminating the need to power down and restart.
- Low temperature Delta-T feature for lower temperature cooking or longer term roasting.
- Programmable cool down feature provides the operator with the ability to lower the temperature of the oven compartment at an accelerated pace.
- Dehydration auxiliary function.
- CombiClean PLUS™ fully automated cleaning with 5 cleaning levels.
- Odometer tracking and audit trail provides extensive diagnostic and troubleshooting features.

#### SHORT FORM SPEC

Provide Alto-Shaam Combitherm® CT PROformance™ floor-standing model CTP20-10E boiler-free electric CombiOven designed with EcoSmart® technology for reduced energy and water consumption. Includes operational modes for steam, convection, a combination of steam and convection heat, and retherm. Oven is to be constructed of 18 gauge stainless steel interior cavity. Oven includes an attached retractable hand shower spray hose with safety shutoff interlock system and a backflow preventer. PROtouch™ control


features includes a cool-down function, automatic cleaning function, recipe programming, two power levels, 0 - 100% humidity levels, auto-reversing fan with five (5) fan speeds, multi-shelf timers, and sleep mode. Oven includes standard right-hand door hinging with integrated preheat strip, USB port, HACCP data access, and six (6) adjustable stainless steel legs. Roll-in pan cart accommodates up to twenty (20) half-size sheet pans or twenty (20) full-size hotel pans (GN 1/1), twenty (20) non-tilt support rails, and includes ten (10) stainless steel shelves.

#### FACTORY INSTALLED OPTIONS

- Boiler Version
- PROpower™ – An accelerated turbo power for an instant boost of heat or quick heat recovery [PATENT PENDING]
- Electrical Choices
  - 208-240V 3ph
  - 380-415V 3ph
  - 440-480V 3ph
- Door Swing
  - Right-hand Door Hinging, standard
  - Recessed Door, optional: increases oven width by 4" (102mm)
- Automatic Grease Collection System [PATENT PENDING], includes four (4) 6-piece, self-trussing poultry racks #5014438, interior drip collection pan, and grease collection container with shut off valve (not available on units with smoking feature)

- Cleaning system choices
  - Automatic tablet-based cleaning system, standard
  - Automatic liquid cleaning system, optional  
Pumps through the system for a deep cleaning, hands free process, includes one (1) removable support tray for liquid cleaner container
- CombiLatch™ door interlock with adjustable timer safeguards operators from heat and steam in the oven cavity when opening the door during a cooking cycle
- Extended One-year Warranty
- Installation Start-Up Check - AVAILABLE THROUGH AN ALTO-SHAAM AUTHORIZED SERVICE AGENCY
- Smoking Feature - including one-step cold smoking

- Probe Choices
  - Removable, single-point, quick-connect core temperature probe, standard
  - Removable, single-point, quick-connect sous vide temperature probe, optional
  - Hard-wired, multi-point core temperature probe, optional
- Security Devices for correctional facility use
  - Optional base package: includes tamper-proof screw package, excludes temperature probe
  - Anti entrapment device, optional
  - Control panel security cover, optional
  - Hasp door lock (padlock not included), optional
  - Removable, single-point, quick-connect core temperature probe, optional
  - Seismic feet package, optional

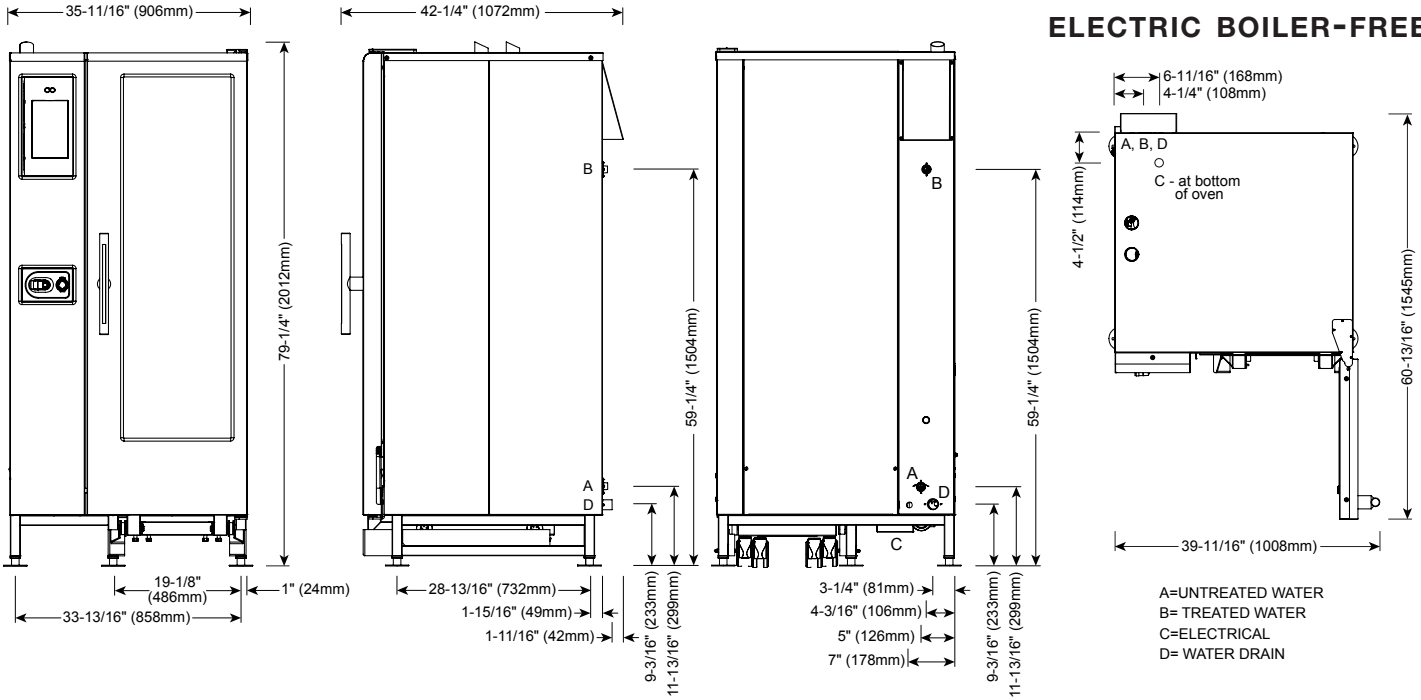

**DIMENSIONS: H x W x D**

**EXTERIOR:**

79-1/4" x 35-11/16" x 42-1/4" (2012mm x 906mm x 1072mm)

**EXTERIOR WITH RECESSED DOOR:**

79-1/4" x 39-11/16" x 42-1/4" (2012mm x 1008mm x 1072mm)

**INTERIOR:**

60-7/16" x 16-1/4" x 28-1/16" (1535mm x 411mm x 712mm)

**WATER REQUIREMENTS**

**TWO (2) COLD WATER INLETS - DRINKING QUALITY**

**ONE (1) TREATED WATER INLET:** 3/4" NPT\* \* Can manifold off of one 3/4" line.  
**ONE (1) UNTREATED WATER INLET:** 3/4" NPT\*

**LINE PRESSURE:** 30 to 90 psi 2.1 to 6.3 bar

**WATER DRAIN:** 1-1/2" (40mm) CONNECTION WITH A 2" MINIMUM AIR GAP INSTALLED AS CLOSE TO THE OVEN AS POSSIBLE. MATERIALS MUST WITHSTAND TEMPERATURES UP TO 200°F (93°C).

**CLEARANCE REQUIREMENTS**

**LEFT:** 0" (0mm) 18" (457mm) FOR SERVICE ACCESS

**RIGHT:** 0" (0mm) NON-COMBUSTIBLE SURFACES 2" (51mm) COMBUSTIBLE SURFACES

**TOP:** 20" (508mm) FOR AIR MOVEMENT

**BACK:** 4" (102mm) **BOTTOM:** 5-1/8" (130mm) FOR LEGS, AIR INTAKE

**INSTALLATION REQUIREMENTS**

- Oven must be installed level.
- Hood installation is required.
- Water supply shut-off valve and back-flow preventer when required by local code.

**WATER QUALITY STANDARDS**

It is the sole responsibility of the owner/operator/purchaser of this equipment to verify that the incoming water supply is comprehensively tested and if required, a means of "water treatment" provided that would meet compliance requirements with the published water quality standards published below. Non-compliance with these minimum standards will potentially damage this equipment and/or components and VOID the original equipment manufacturer's warranty. Alto-Shaam recommends using OptiPure® [www.optipurewater.com] products to properly treat your water.

**Contaminant Inlet Water Requirements**

Free Chlorine Less than 0.1 ppm (mg/L)

Hardness 30-70 ppm

Chloride Less than 30 ppm (mg/L)

pH 7.0 to 8.5

Silica Less than 12 ppm (mg/L)

Total Dissolved Solids (tds) 50-125 ppm

**ELECTRICAL - CTP20-10E (NO CORD, NO PLUG, DEDICATED CIRCUIT REQUIRED) DO NOT CONNECT TO A G.F.I. OUTLET**

**WITH COMBISMOKER® OPTION**

| VOLTAGE | PH | HZ    | AWG   | CONNECTION       | ECO STANDARD |           |         | **PROpower™ OPTION |           |         | ECO STANDARD |           |         | **PROpower™ OPTION |           |         |
|---------|----|-------|-------|------------------|--------------|-----------|---------|--------------------|-----------|---------|--------------|-----------|---------|--------------------|-----------|---------|
|         |    |       |       |                  | AMPS         | KW        | BREAKER | AMPS               | KW        | BREAKER | AMPS         | KW        | BREAKER | AMPS               | KW        | BREAKER |
| 208-240 | 3  | 50/60 | 1-1/0 | L1, L2, L3, G    | 78.8-90.9    | 28.4-37.8 | 80-90   | 98.8-114           | 33.2-44.2 | 100-125 | 81.3-93.8    | 28.9-38.5 | 90-100  | 101.3-116.9        | 33.7-44.9 | 110-125 |
| 380-415 | 3  | 50    | 4-3   | L1, L2, L3, N, G | 48.2-52.5    | 32.3-37.8 | 63      | 60.5-65.8          | 37.1-44.2 | 63-80   | 50.9-55.4    | 32.8-38.5 | 63      | 63.1-68.7          | 37.7-44.9 | 100     |
| 440-480 | 3* | 60    | 6-4   | L1, L2, L3, G    | 41.7-45.5    | 32.4-37.8 | 50      | 52.2-57            | 37.2-44.2 | 60      | 43-46.9      | 32.9-38.5 | 50      | 53.6-58.5          | 37.8-44.9 | 60      |

\*ELECTRICAL SERVICE CHARGE APPLIES

\*\*NO-COST OPTION ON ELECTRIC MODELS

| WEIGHT                                                                                   |             |         | SHIP DIMENSIONS             |                         | PAN CAPACITY                                           |                    |             |
|------------------------------------------------------------------------------------------|-------------|---------|-----------------------------|-------------------------|--------------------------------------------------------|--------------------|-------------|
| NET                                                                                      | 905 lbs est | 410 kg  | (L x W x H) 56" x 45" x 87" | (1422 x 1143 x 2210mm)* | FULL-SIZE:                                             | 20" x 12" x 2-1/2" | Twenty (20) |
| SHIP                                                                                     | 955 lbs*    | 433 kg* |                             |                         | GN 1/1:                                                | 530 x 325 x 65mm   | Twenty (20) |
| *DOMESTIC GROUND SHIPPING INFORMATION. CONTACT FACTORY FOR EXPORT WEIGHT AND DIMENSIONS. |             |         |                             |                         | *HALF-SIZE SHEET:                                      | 18" x 26" x 1"     | Twenty (20) |
|                                                                                          |             |         |                             |                         | *ON WIRE SHELVES ONLY                                  |                    |             |
|                                                                                          |             |         |                             |                         | VOLUME MAXIMUM: 150 quarts (190 liters)                |                    |             |
|                                                                                          |             |         |                             |                         | *ADDITIONAL WIRE SHELVES REQUIRED FOR MAXIMUM CAPACITY |                    |             |