

REACH-IN REFRIGERATOR

Model: 2R

2-Section Reach-In Refrigerator

2R - Stainless steel front, aluminum end panels and interior
 2R-SA - Stainless steel exterior, aluminum interior
 2R-SS - Stainless steel exterior and interior
Designed to maintain NSF-7 temperatures in 100°F ambient.



Options and Accessories

(upcharge and lead times may apply)

| | |
|---------------------------------------|---|
| Stainless steel case back | Pan slide assemblies |
| Additional epoxy-coated steel shelves | Pass-Thru |
| Chrome or stainless steel shelves | Shallow depth |
| Heavy-duty pilaster strips | Hinged glass doors |
| Rehinging of doors (consult factory) | Increased refrigeration systems |
| Expansion valve system | Special electrical req. (consult factory) |
| Wine display | Correctional Facility Options |
| Adjustable legs | • One way security screws |
| Digital thermometer | • Locking hasp (lock not included) |
| Remote models | • Stainless steel mesh cover |
| Custom laminates | • Coverless hinges |
| Half doors | |

Consult factory for other model configurations, options and accessories.

Continental
 Refrigerator

Toll-Free: 800-523-7138
 Phone: 215-244-1400
 Fax: 215-244-9579

539 Dunksferry Road
 Bensalem, PA 19020
www.continentalrefrigerator.com

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Environmentally-safe R-134a refrigerant

Self contained, performance-rated refrigeration system

Automatic, electric condensate evaporator

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handles

Cam-action, lift-off hinges

Self-closing doors

Magnetic snap-in door gaskets

Cylinder lock in door

Heavy-duty, epoxy-coated steel shelves

5" casters

MODEL FEATURES

LED interior lighting

External dial thermometer

Energy saving switch for door heaters

APPROVAL:

Model Specifications

DIMENSIONAL DATA

| | |
|--|------------------|
| Net Capacity (cu. ft.) | 48 (1359 cu l) |
| Width, Overall (in.) | 52 (1321 mm) |
| Depth, Overall (in.) (incl. handles) | 35 3/8 (899 mm) |
| Depth (in.) (less doors) | 32 (813 mm) |
| Depth (in.) (doors open 90°) | 55 1/2 (1410 mm) |
| Clear Door Width (in.) | 19 3/8 (492 mm) |
| Clear Door Height (in.) | 58 5/8 (1489 mm) |
| Height, Overall (in.) (incl. 5" casters) | 82 1/4 (2089 mm) |
| No. of Doors | 2 |
| No. of Shelves | 6 |
| Shelf Area (sq. ft.) | 40.8 (3.8 sq m) |
| Tray Slide Capacity (per section) | 24 ea. |

REFRIGERANT DATA

| | |
|-----------------------------|------|
| Condensing Unit Size (H.P.) | 1/3 |
| Capacity (BTU/Hr)* | 2560 |

ELECTRICAL DATA

| | |
|-------------------------------------|---------------------|
| Voltage (int'l) | 115/60/1 (220/50/1) |
| Feed Wires (incl. ground) | 3 |
| Total Amps (int'l) | 6.5 (4.9) |
| 10 ft. Cord/Plug [attached] (int'l) | Yes (No) |

SHIPPING DATA



| | |
|------------------------------|------------------|
| Height - Crated (in.) | 85 1/2 (2172 mm) |
| Width - Crated (in.) | 64 (1626 mm) |
| Depth - Crated (in.) | 42 (1067 mm) |
| Volume - Crated (cu. ft.) | 133 (3766 cu l) |
| Weight Std - Crated (lbs.) | 520 (236 kg) |
| Weight SS - Crated (lbs.) | 600 (272 kg) |
| Weight Std - Uncrated (lbs.) | 350 (159 kg) |
| Weight SS - Uncrated (lbs.) | 430 (195 kg) |

* Rating @ +25°F evaporator, 90°F ambient
 Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug
 (varies by country)

Model Plan Views

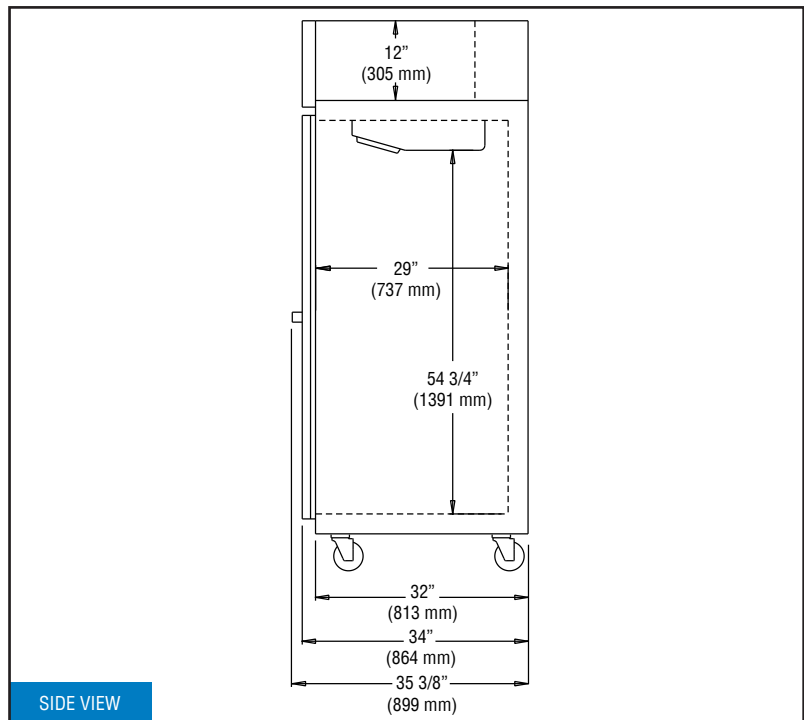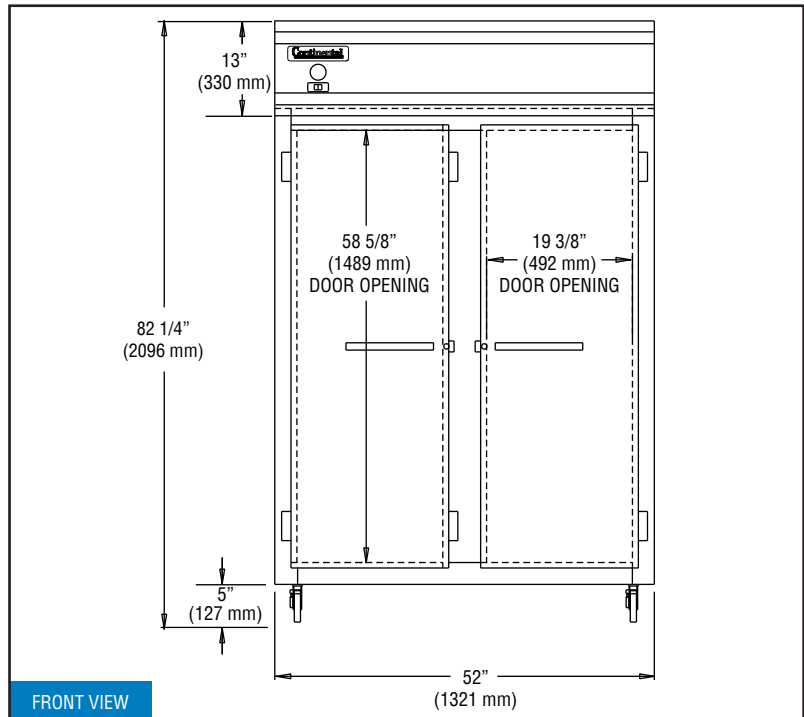

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required.

Continental
 Refrigerator

Toll-Free: 800-523-7138
 Phone: 215-244-1400
 Fax: 215-244-9579

539 Dunkserry Road
 Bensalem, PA 19020
www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



MADE IN THE U.S.A.

© Copyright 2015. Continental Refrigerator.
 A Division of National Refrigeration & Air Conditioning Products, Inc.