

# Continental

*Designer-line*  
REFRIGERATORS

**Refrigerator**

**SANDWICH UNIT  
MIGHTY TOP  
FRONT BREATHER**

## Standard Features

Utilizing Environmentally Safe, CFC-free R-134a Refrigerant



DL60-24M-FB

### Models Available

- DL27-12M-FB
- DL48-12M-FB
- DL48-18M-FB
- DL60-12M-FB
- DL60-18M-FB
- DL60-24M-FB
- DL72-18M-FB
- DL72-27M-FB
- DL72-30M-FB

- Unique Field Assembled, Bottom Mounted Ventilation System Designed To Allow Cabinets To Be Flush Against A Wall Or Built Into A Counter To Conserve Space
- 12" Deep, Full Length Nylon Cutting Board
- Unique Air Flow Distribution Allows Pan Product To Maintain 33°-41°F Being In Compliance With and Certified Under The New '98 NSF Standard For Preparation Units
- Modern, State-of-the Art Styling
- Performance Rated Refrigeration System Utilizing Environmentally Safe R-134a Refrigerant
- Easily Serviceable Back Mounted Compressor
- 2" Non-CFC Polyurethane Foam Insulation
- Spring Loaded, Self Closing Door
- Magnetic Snap-In Gasket
- 3 $\frac{3}{8}$ " Casters
- Heavy-Duty, Epoxy-Coated Steel Shelves
- Cabinet Construction Consisting of Stainless Steel Exterior and Interior
- Completely Enclosed, Vented & Removable Case Back
- Automatic, Energy Saving, Non-Electric Condensate Disposal
- 1/6 Size Pans, 4" Deep
- 10 ft Cord and Plug Attached

### REFRIGERATION SYSTEM

The self-contained refrigeration system is rear mounted, concealed behind a removable louvered cover. Full-length front air grille allows for even air circulation to condensing unit. A "Performance Rated", air-cooled, hermetically sealed, capillary type refrigeration system is installed in each model. Plasticized finned coil and air circulating fans are contained within an easily accessible rear mounted housing. Our unique airflow design allows the cabinet to be enclosed on both sides or to be mounted flush against a wall. Our refrigeration system, fully charged with R-134a refrigerant, is designed to maintain 38° - 40° Fahrenheit while operating with an unrestricted air supply in an ambient temperature of 100° Fahrenheit. All condensate water is directed to a non-electric condensate vaporizer located in the compressor compartment, thus no plumbing is required. A strict quality assurance team inspects all materials and components to certify that each model conforms to the most exacting standards. All models are performance tested for a minimum of 16 hours prior to crating.

### CABINET CONSTRUCTION

All materials are of top quality and are assembled under rigid supervision conforming to strict quality assurance requirements. Case is of all metal welded construction and is internally supported and braced for rigid unit construction. Exterior cabinet back and bottom are heavy gauge galvanized steel. Worktop is constructed of heavy gauge polished stainless steel for durability.

Cabinet design eliminates overlapping panels with raw edges. Interior corners are rounded with a  $\frac{1}{4}$ " radius for cleaning ease. All cabinet joints and seams are vapor-tight sealed. An easily removable anti-sweat door heater, concealed by a non-metallic, non-conductive, high impact thermal breaker strip, eliminates condensation build-up on case front.

### INSULATION

All cabinet walls, top, and bottom have high density, foamed-in-place, non-CFC polyurethane insulation.

### SHELVING

Shelves are designed for heavy-duty use with .306" diameter frame and brace members and .140" diameter fill wires spaced  $\frac{3}{4}$ " apart. Shelves are welded steel and epoxy-coated for a durable, long, rust-free service life.

### DOOR CONSTRUCTION

Door shells are constructed of heavy-gauge stainless steel and are internally braced and urethane-foam-insulated for rigidity. Door corners are of welded construction and polished. Replaceable snap-in door gaskets are self adjusting, heavy-duty, magnetic type. Door handles and hinges are chrome-plated and non-corrosive. Hinges are spring loaded, heavy duty, self-closing.



c






REFRIGERATORS


CHARACTERISTICS

DIMENSIONAL DATA


	MODEL DL27-12M-FB	MODEL DL48-12M-FB	MODEL DL48-18M-FB	MODEL DL60-12M-FB	MODEL DL60-18M-FB	MODEL DL60-24M-FB	MODEL DL72-18M-FB	MODEL DL72-27M-FB	MODEL DL72-30M-FB
Net Capacity (cu. ft.)	7.4	13.4	13.4	17.0	17.0	17.0	20.6	20.6	20.6
1/6 Size Pans (4" Deep)	12	12	18	12	18	24	18	27	30
Width, Overall (in.)	27 1/2	48	48	60	60	60	72	72	72
Depth, Overall (Incl. Hds.) (in.)	34	34	34	34	34	34	34	34	34
Depth, Body only (Less Door(s)) (in.)	27 1/2	27 1/2	27 1/2	27 1/2	27 1/2	27 1/2	27 1/2	27 1/2	27 1/2
Depth, Cutting Board	10	10	10	10	10	10	10	10	10
Height (Incl. 3 5/8" Casters)	40 5/8	40 5/8	40 5/8	40 5/8	40 5/8	40 5/8	40 5/8	40 5/8	40 5/8
Shelf Area (sq.ft.)	3.5	6.8	6.8	8.1	8.1	8.1	10.2	10.2	10.2
Shelves	1	2	2	2	2	2	3	3	3
Doors	1	2	2	2	2	2	3	3	3
Condensing Unit Size (H.P.)	1/5	1/5	1/5	1/4	1/4	1/4	1/4	1/4	1/4
Refrigerant	R134a	R134a	R134a	R134a	R134a	R134a	R134a	R134a	R134a
Cabinets Electric	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1
Amps	6.2	7.1	7.1	8.2	8.2	8.2	9.0	9.0	9.0
Fans	2	3	3	3	3	3	4	4	4
Interior Depth (in.)	20	20	20	20	20	20	20	20	20
Interior Height (in.)	26 1/4	26 1/4	26 1/4	26 1/4	26 1/4	26 1/4	26 1/4	26 1/4	26 1/4
Interior Width (in.)	24 1/2	44	44	56	56	56	68	68	68
Shipping Weight (lbs.)	188	282	285	319	322	330	398	414	420
Shipping Height (in.)	43 1/4	43 1/4	43 1/4	43 1/4	43 1/4	43 1/4	43 1/4	43 1/4	43 1/4
Shipping Length (in.)	35 3/4	64	64	68 1/4	68 1/4	68 1/4	80 1/4	80 1/4	80 1/4
Shipping Depth (in.)	46	46	46	46	46	46	46	46	46




DL27-12M-FB Front View




DL48-12M, 18M-FB Front View




DL60-12M, 18M, 24M-FB Front View

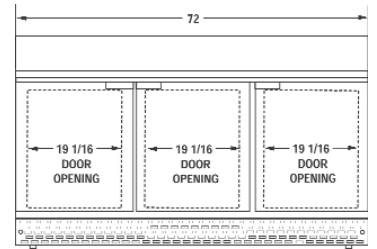


DL72-18M, 27M, 30M-FB Front View




SIDE VIEW DIMENSIONS




DL27-12M-FB




DL48-12M-FB




DL48-18M-FB




DL60-12M-FB




DL60-18M-FB




DL60-24M-FB



DL72-18M-FB



DL72-27M-FB



DL72-30M-FB



A Division of National Refrigeration & A/C Products, Inc.  
 539 Dunksferry Road Bensalem, PA 19020  
 (800) 523-7138 Fax: (215) 244-9579  
 www.continentalrefrigerator.com