



Encore® Glass Filler Faucet KL26-5001

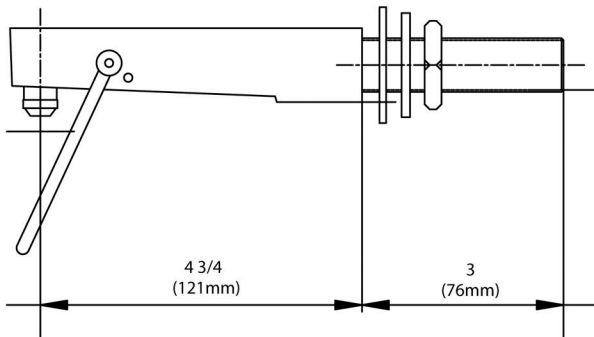

Dimensions shown in inches (mm) are for reference only and are subject to change.

1/2" NPSM Male Inlet
Operating Temperature: 40 - 180°F
Operating Pressure: 20 - 125psi

Approximate shipping weight - 2 lbs.
Warranty - 2 years

Deck mounted glass filler

Commercial Quality Features

- Polished chrome plated brass
- Stainless steel valve and lever
- Two position lever arm pushes back for easy filling or upward for continuous flow
- Fully adjustable aerator for regulated water flow control

SPECIFICATIONS:

Glass filler to be Encore KL26-5001. Glass filler to be constructed of polished chrome plated brass with total lead content less than 0.25% by weighted average. Valve and lever to be stainless steel. Lever arm to have two positions. Fully adjustable aerator for regulated water flow control. Mounting hardware to be included.

COMPLIES WITH:
ASME A112.18.1-2005
CSA B125.1-05
NSF/ANSI 61/9, ANNEX G
SECTION 116875 OF THE
CALIFORNIA HEALTH & SAFETY CODE
(COMMONLY KNOWN AS AB1953)
VERMONT ACT 193
UNIFORM PLUMBING CODE

