

**PROJECT NAME:** \_\_\_\_\_

**LOCATION:** \_\_\_\_\_


**SPECIFIER ITEM NO.** \_\_\_\_\_ **QTY:** \_\_\_\_\_

**ENCORE PART NO.** \_\_\_\_\_

Encore<sup>®</sup> 4" (102mm) Deck Mount Faucet with Rigid Gooseneck Spout and 4" (102mm) Wrist Blade Handles

## KL41-4x0x-RE4 Series

- KL41-4100-RE4 3" spout, ceramic valves
- KL41-4000-RE4 3" spout, compression valves
- KL41-4101-RE4 8" spout, ceramic valves
- KL41-4001-RE4 8" spout, compression valves
- KL41-4102-RE4 6" spout, ceramic valves
- KL41-4002-RE4 6" spout, compression valves

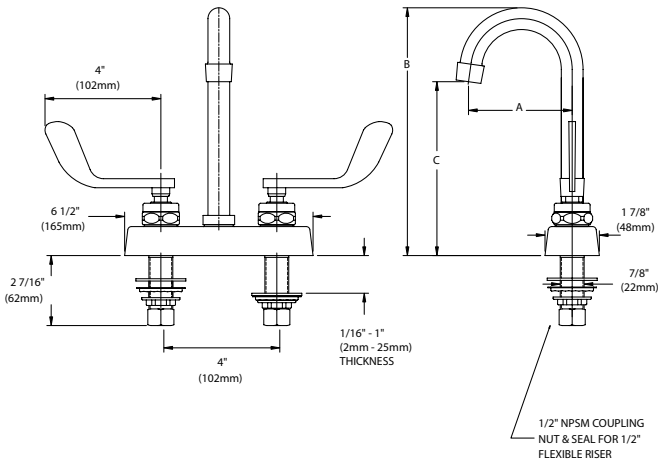

Dimensions shown in inches (mm) are for reference only and are subject to change.

1-1/8" (29mm) hole for deck and backsplash is recommended to accommodate 1/2" supply nipples  
1/2" NPSM Male Inlets  
Operating Temperature: 40 - 180°F (5 - 83°C)  
Operating Pressure: 15 - 125psi

Approximate shipping weight - 5 lbs  
Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality.

### Commercial Quality Features

- Rigid gooseneck spout design
- ADA-compliant 4" wrist blade handles
- Built-in check valves to prevent cross-flow and back-flow
- Leak proof double O-ring spout design
- Stainless steel spout

### SANIGUARD<sup>®</sup> Product Protection

- Permanently incorporated on all touch points of Encore plumbing fixtures
- Inorganic, silver ion technology inhibits growth of common bacteria, yeasts, mold and fungi, minimizes cross-contamination

### SPECIFICATIONS:

Deck Mount Faucet to be Encore KL41 Series in the following configuration:

- \_\_\_\_\_ KL41-4100-RE4 3" spout, ceramic valves
- \_\_\_\_\_ KL41-4000-RE4 3" spout, compression valves
- \_\_\_\_\_ KL41-4101-RE4 8" spout, ceramic valves
- \_\_\_\_\_ KL41-4001-RE4 8" spout, compression valves
- \_\_\_\_\_ KL41-4102-RE4 6" spout, ceramic valves
- \_\_\_\_\_ KL41-4002-RE4 6" spout, compression valves

Faucet body to be constructed of polished chrome plated brass with total lead content less than 0.25% by weighted average. 4" wrist blade handles to be incorporated with SANIGUARD treatment. Supply inlets to be 4" on center. Valves to be 1/4-turn with integral check valve to prevent cross-flow and back-flow. Spout to be stainless steel rigid gooseneck style with leak proof double O-ring seal design. Color coded temperature indexes shall meet international standards. 2.2gpm aerator @ 60psi standard with full flow stream bubbler screen spout tip.

Model No.	A	B	C
KL41-4100-RE4	3-1/2" (89 mm)	8-5/16" (211mm)	6-1/16" (154mm)
KL41-4000-RE4	3-1/2" (89 mm)	8-5/16" (211mm)	6-1/16" (154mm)
KL41-4101-RE4	8-1/2" (216mm)	12-1/16" (306mm)	6-5/16" (160mm)
KL41-4001-RE4	8-1/2" (216mm)	12-1/16" (306mm)	6-5/16" (160mm)
KL41-4102-RE4	6" (152mm)	9-3/16" (233mm)	5-1/2" (140mm)
KL41-4002-RE4	6" (152mm)	9-3/16" (233mm)	5-1/2" (140mm)

For a complete list of available options for KL41-4000 Series, see product configurator on reverse.



COMPLIES WITH:  
THE FEDERAL "REDUCTION OF LEAD IN DRINKING WATER ACT" -  
2011 - US SENATE BILL NO. S.3874  
NSF/ANSI 61/9, ANNEX G



# KL41-4x0x-RE4 Series



1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701  
 Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110  
[www.encoreplumbing.com](http://www.encoreplumbing.com) • [www.componenthardware.com](http://www.componenthardware.com)

## Faucet Configuration for KL41-4000 Series

