


Encore® Anti-Spill, Anti-Siphon Backflow
 Backflow Preventer

KL50-X197
KL50-X198

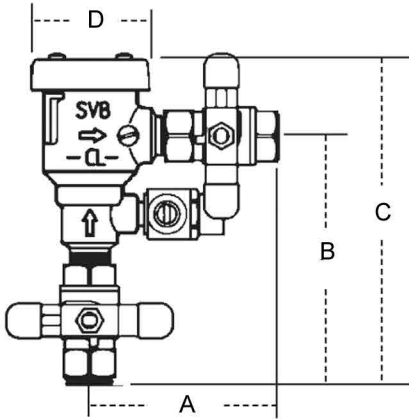

Dimensions shown in inches (mm) are for reference only and are subject to change.

Maximum Working Pressure: 150psi (10.3 bar)
 Temperature Range: 33°F - 180°F (5°C - 83°C)

Approximate shipping weight - 2 lbs.

Back siphoning prevention for faucet units

SPECIFICATIONS:

Backflow preventer to be Encore KL50 Series in the following configuration:

- _____ KL50-X197 3/8" Inlet
- _____ KL50-X198 1/2" Inlet

Spill-resistant vacuum breaker shall include a one-piece modular check valve and float assembly constructed of engineered thermoplastic and housed in a lead free cast copper silicon alloy body. A molded diaphragm separates the air inlet from the potable water supply to prevent spillage.

Model No.	Inlet	A	B	C	D
KL50-X197	3/8" (10mm)	3-1/8" (79mm)	4" (102mm)	5-1/2" (140mm)	2" (51mm)
KL50-X198	1/2" (13mm)	3-3/8" (86mm)	4-1/4" (108mm)	5-3/4" (146mm)	2" (51mm)