

**PROJECT NAME:** \_\_\_\_\_

**LOCATION:** \_\_\_\_\_


**SPECIFIER ITEM NO.** \_\_\_\_\_ **QTY:** \_\_\_\_\_

**ENCORE PART NO.** \_\_\_\_\_

Encore<sup>®</sup> Wall Mount Faucet with Double  
Jointed Swing Spout and Lever Handles

**KL54-8xxx-SE1 Series**

- KL54-8118-SE1 18" Spout, Ceramic Valves
- KL54-8018-SE1 18" Spout, Compression Valves
- KL54-8124-SE1 24" Spout, Ceramic Valves
- KL54-8024-SE1 24" Spout, Compression Valves

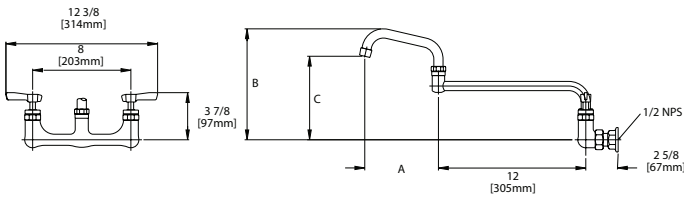

Dimensions shown in inches (mm) are for reference only and are subject to change.

1-1/2" (29mm) holes for backsplash are recommended to accommodate 1/2" supply nipples.  
1/2" NPT Female Inlets  
Operating Temperature: 40 - 180°F (5 - 83°C)  
Operating Pressure: 15 - 125psi

Approximate shipping weight - 5 lbs  
Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality

**Commercial Quality Features**

- Double jointed swing spout design
- ADA-compliant lever handles
- Built-in check valve to prevent cross-flow and back-flow
- Leak proof double O-ring spout design
- Stainless steel spout

**SANIGUARD<sup>®</sup> Product Protection**

- Permanently incorporated on all touch points of Encore plumbing fixtures
- Inorganic, silver ion technology inhibits growth of common bacteria, yeasts, mold and fungi, minimizes cross-contamination

**SPECIFICATIONS:**

Wall Mount Faucet to be Encore KL54 Series in the following configuration:

- \_\_\_\_\_ KL54-8118-SE1 18" Spout, Ceramic Valves
- \_\_\_\_\_ KL54-8018-SE1 18" Spout, Compression Valves
- \_\_\_\_\_ KL54-8124-SE1 24" Spout, Ceramic Valves
- \_\_\_\_\_ KL54-8024-SE1 24" Spout, Compression Valves

Faucet body to be constructed of polished chrome plated brass with total lead content less than 0.25% by weighted average. Lever handles to be incorporated with SANIGUARD treatment. Valves to be 1/4-turn with integral check valve to prevent cross-flow and back-flow. Spout to be stainless steel double O-ring swing extension and double O-ring swing spout. Color coded temperature indexes shall meet international standards. 2.2gpm aerator @ 60psi standard with full flow stream bubbler screen spout tip.

Model No.	A	B	C
KL54-8118-SE1	6" (152mm)	9-1/16" (229mm)	6-13/16" (173mm)
KL54-8018-SE1	6" (152mm)	9-1/16" (229mm)	6-13/16" (173mm)
KL54-8124-SE1	12" (305mm)	6-15/16" (176mm)	4-11/16" (120mm)
KL54-8024-SE1	12" (305mm)	6-15/16" (176mm)	4-11/16" (120mm)

**COMPLIES WITH:**

ASME A112.18.1-2005  
CSA B125.1-05  
NSF/ANSI 61/9, ANNEX G  
SECTION 116875 OF THE  
CALIFORNIA HEALTH & SAFETY CODE  
(COMMONLY KNOWN AS AB1953)  
VERMONT ACT 193  
UNIFORM PLUMBING CODE

