

PROJECT NAME: _____

LOCATION: _____


SPECIFIER ITEM NO. _____ **QTY:** _____

ENCORE PART NO. _____

Encore[®] 4" Deck Mount Faucet with
 Tubular Swing Spout & Lever Handles

KL57-4xxx-SE1 Series

- KL57-4106-SE1 6" Spout, Ceramic Valves
- KL57-4006-SE1 6" Spout, Compression Valves
- KL57-4108-SE1 8" Spout, Ceramic Valves
- KL57-4008-SE1 8" Spout, Compression Valves
- KL57-4110-SE1 10" Spout, Ceramic Valves
- KL57-4010-SE1 10" Spout, Compression Valves
- KL57-4112-SE1 12" Spout, Ceramic Valves
- KL57-4012-SE1 12" Spout, Compression Valves
- KL57-4114-SE1 14" Spout, Ceramic Valves
- KL57-4014-SE1 14" Spout, Compression Valves
- KL57-4116-SE1 16" Spout, Ceramic Valves
- KL57-4016-SE1 16" Spout, Compression Valves

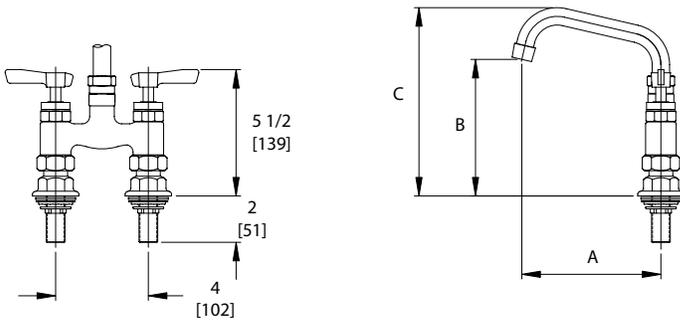

Dimensions shown in inches (mm) are for reference only and are subject to change.

1-1/8" (29mm) holes for deck are recommended to accommodate 1/2" supply nipples.

1/2" NPSM Male Inlets

Operating Temperature: 40-180°F (5-83°C)

Operating Pressure: 15-125psi

Approximate shipping weight - 6 lbs
 Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality

Commercial Quality Features

- Tubular swing spout design
- ADA-compliant lever handles
- Built-in check valve to prevent cross-flow and back-flow
- Leak proof double O-ring spout design
- Stainless steel spout

SANIGUARD[®] Product Protection

- Permanently incorporated on all touch points of Encore plumbing fixtures
- Inorganic, silver ion technology inhibits growth of common bacteria, yeasts, mold and fungi, minimizes cross-contamination

SPECIFICATIONS:

4" Deck Mount Faucet to be Encore KL57 Series in the following configuration:

- _____ KL57-4106-SE1 6" Spout, Ceramic Valves
- _____ KL57-4006-SE1 6" Spout, Compression Valves
- _____ KL57-4108-SE1 8" Spout, Ceramic Valves
- _____ KL57-4008-SE1 8" Spout, Compression Valves
- _____ KL57-4110-SE1 10" Spout, Ceramic Valves
- _____ KL57-4010-SE1 10" Spout, Compression Valves
- _____ KL57-4112-SE1 12" Spout, Ceramic Valves
- _____ KL57-4012-SE1 12" Spout, Compression Valves
- _____ KL57-4114-SE1 14" Spout, Ceramic Valves
- _____ KL57-4014-SE1 14" Spout, Compression Valves
- _____ KL57-4116-SE1 16" Spout, Ceramic Valves
- _____ KL57-4016-SE1 16" Spout, Compression Valves

Faucet body to be constructed of polished chrome plated brass with total lead content less than 0.25% by weighted average. Lever handles to be incorporated with SANIGUARD treatment. Color coded temperature indexes shall meet international standards. Valve to be 1/4-turn with integral check valve to prevent cross-flow and back-flow. Spout to be stainless steel tubular swing style with leak proof double O-ring seal design. 2.2gpm aerator @ 60psi standard with full flow stream bubbler screen spout tip.

Model No.	A	B	C
KL57-4106-SE1	6" (152mm)	5-7/8" (150mm)	8-1/8" (207mm)
KL57-4006-SE1	6" (152mm)	5-7/8" (150mm)	8-1/8" (207mm)
KL57-4108-SE1	8" (203mm)	6-3/8" (162mm)	8-5/8" (219mm)
KL57-4008-SE1	8" (203mm)	6-3/8" (162mm)	8-5/8" (219mm)
KL57-4110-SE1	10" (254mm)	6-13/16" (173mm)	9-1/16" (230mm)
KL57-4010-SE1	10" (254mm)	6-13/16" (173mm)	9-1/16" (230mm)
KL57-4112-SE1	12" (305mm)	7-5/16" (185mm)	9-9/16" (243mm)
KL57-4012-SE1	12" (305mm)	7-5/16" (185mm)	9-9/16" (243mm)
KL57-4114-SE1	14" (356mm)	7-3/4" (197mm)	10" (254mm)
KL57-4014-SE1	14" (356mm)	7-3/4" (197mm)	10" (254mm)
KL57-4116-SE1	16" (406mm)	8-3/16" (208mm)	10-7/16" (265mm)
KL57-4016-SE1	16" (406mm)	8-3/16" (208mm)	10-7/16" (265mm)

COMPLIES WITH:
 THE FEDERAL "REDUCTION OF LEAD
 IN DRINKING WATER ACT" -
 2011 - US SENATE BILL NO. S.3874
 NSF/ANSI 61/9, ANNEX G

