


**CARTER-HOFFMANN**

# PH1470 & PH1490 HEAVY-DUTY HEATED TRANSPORT CARTS For Compartment Trays

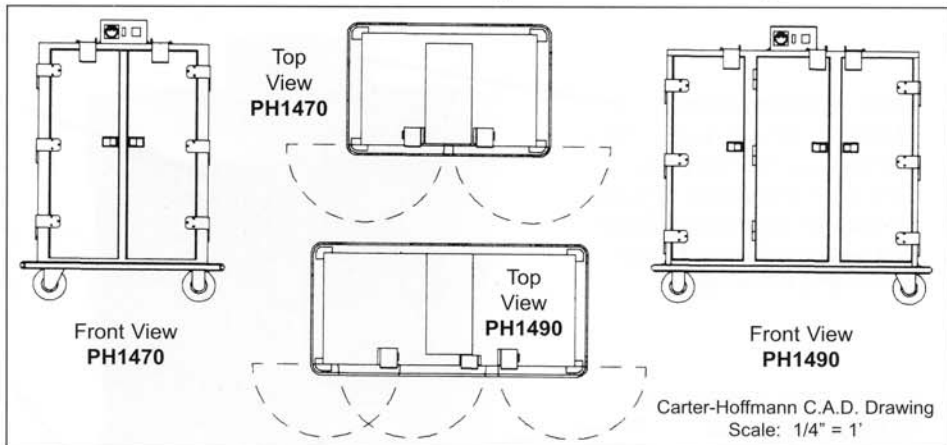

Model Number	Tray Capacity*		Inside Working Height		Overall Dimensions						Caster Diameter		Shipping Weight	
	10" x 14"	14" x 18" or 15" x 20"	in	mm	Height		Depth		Width		in	mm	lbs	kgs
PH1470	60	30	49	1245	69 1/4	1759	31 3/4	806	50 1/2	1283	8	203	449	204
PH1490	90	45	49	1245	69 1/4	1759	31 3/4	806	70 3/8	1788	8	203	600	273

\* Tray slide spacing is fixed on 3" centers. Sample tray required with order.

**CONSTRUCTION...** Completely welded cabinet construction with outer cabinet formed and welded to base. All seams turned in to eliminate raw edges. Exposed fasteners tamper resistant.

**CABINET MATERIAL...** Nickel-bearing type 300 series stainless steel; 16 gauge polished exterior wall and 20 gauge interior.

**BASE FRAME...** 12 gauge stainless steel full depth caster bolsters with 1" x 1" 16 gauge tubular stainless steel perimeter supports welded to bolsters.

**CASTERS...** 8" diameter, industrial grade caster with polyurethane tread. Sealed roller axle bearing and double ball bearing swivel. Zerk grease fittings. Plate mounted and bolted to base in offset "wheel ahead" pattern. Two casters fitted with brakes.

**BUMPER...** Non-marking gray vinyl bumper set in heavy-duty 3/16" thick extruded aluminum frame with reinforced corner cut-outs. Bumper reinforced with 12 gauge angle brackets welded to cart and bolted through bumper.

**INSULATION...** High density, continuous wrap-around type fiberglass insulation; 1" thick in sides, bottom and top.

**DOORS...** Non-removable, recessed within cart walls, top and base. Welded double panel stainless steel. 16 gauge polished exterior and 20 gauge interior. Filled with 1" thick high density fiberglass insulation. 270 degree door swing (except center door on PH1490).

**HINGES...** 12 gauge stainless steel hinges with 3/8" diameter stainless steel pins, fully welded and bolted to cabinet and doors.

**GASKETS...** High temperature silicone gaskets mounted to cabinet.

**LATCHES...** Flush mounted heavy-duty slide latches for positive door closure.

**TRANSPORT/SECURITY LATCHES...** Top mounted 12 gauge transport/security latches with padlock provision. Welded to cabinet top.

**PUSH HANDLES...** Two tubular stainless steel push handles recessed in cabinet.

**TRAY RACK ASSEMBLIES...** 18 gauge stainless steel tray racks with welded stainless steel angle slides. Tray racks secured in place with tamper resistant hold down device, removable with tools.

Specifications subject to change through product improvement & innovation.

**THERMOMETER...** Dial type with remote sensing bulb and protective Lexan cover.

**HEATING SYSTEM...** Top mounted heater secured in place with tamper resistant screws. Inconel-sheathed heating element. High impedance protected, internally cooled fan motor. Full range thermostat concealed for tamper resistance. Power indicating light.

**HEAT DUCT SYSTEM...** Exclusive full vertical stainless steel heat duct, rear-mounted in cabinet interior.

**ELECTRICAL CHARACTERISTICS...** PH1470 operates on 120 volts, 60 cycle single phase, 1500 watts, 12.5 amps. PH1490 operates on 120 volts, 60 cycle, single phase, 2000 watts, 16.7 amps. Ten foot 3 wire rubber cord with 3 prong grounding plug. NEMA 5-15P on PH1470 and NEMA 5-20P on PH1490.

**PERFORMANCE...** Capable of heating to 200° F (94° C). Preheat to 160° F (71° C) approximately 25 minutes.

- ACCESSORIES/OPTIONS...**
- Menu Card Holder
  - Pull Handles in lieu of Sliding Latches
  - Top Rail
  - 220 Volt Operation
  - 240 Volt Operation

# SPECIFICATIONS



**CARTER-HOFFMANN CORP.**  
 1551 McCormick Ave., Mundelein, IL 60060  
 Tel (847) 362-5500 • (800) 323-9793 • Fax (847) 367-8981  
[www.carter-hoffmann.com](http://www.carter-hoffmann.com)