



Electrolux

air-o-steam
air-o-steam TOUCHLINE
Electric Combi Oven 101

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



Electrolux

air-o-steam TOUCHLINE Electric Combi Oven 101

air-o-steam



air-o-steam

air-o-steam TOUCHLINE Electric
Combi Oven 101

267282 (AOS101ETM1) EI Combi TOUCHLINE Oven
101 – 208V/3ph/60Hz - 47A

267322 (AOS101ETV1) EI Combi TOUCHLINE Oven
101 – 480V/3ph/60Hz - 47A

Short Form Specification

Item No. _____

Unit to be Electrolux air-o-steam® Combi TOUCHLINE Oven. The air-o-steam® features three cooking modes – Automatic, Programs and Manual. Large touch-screen display for both set and actual values of humidity and temperature in cooking chamber during cooking. Three automatic modes: Low Temperature Cooking cycle (LTC), reheating cycle and proofing cycle. Traditional cooking modes - steam (max. 266 °F - 130°C), hot convected air (max. 572 °F - 300°C) and combi-mode (max. 482°F - 250°C). Each cooking mode operates under Lambda-sensor driven air-o-clima™: automatic and constant real humidity control. 6-point multi-sensor for core temperature controlled cooking cycles. All 304 stainless-steel construction, seamless hygienic cooking chamber with all rounded corners. Double thermo-glazed door with open frame construction for cool outside door panel. Halogen cooking chamber lighting. IPX-5 spray water protection certification. Retractable spray hose included as standard. USB connection. air-o-clean™, automatic and built-in self-cleaning system. Food Safe control to automatically monitor and validate the cooking process according to HACCP standards. HACCP management available upon request. Green functions to save energy, water and rinse aid. Half day chef training included. Covered by Electrolux Platinum Star® Service Program two-year parts and one-year labor warranty, installation start-up and performance checkup after one year from installation.



APPROVAL: _____

Main Features

- Manual mode: traditional cooking style by manually selecting the parameters. Traditional cooking cycles available:
 - Dry, hot convection cycle (max. 212 °F / max 300 °C): ideal for low humidity cooking such as dehydration, baking and grilling.
 - Low temperature steam cycle (max. 212 °F / 100 °C): ideal for sous-vide (vacuum packed), rethermalization and delicate steam cooking.
 - Steam cycle (212 °F / 100 °C): ideal for traditionally steaming products such as seafood and vegetables.
 - High temperature steam (max. 266 °F / max. 130 °C): ideal for steaming frozen products and vegetables.
 - Combination cycle (max. 482 °F / max. 250 °C): combines convected heat and steam to obtain a humidity controlled cooking environment, accelerating the cooking process, while guaranteeing perfect textures and reducing weight loss.

Possible to set up to 16-phases (steps).

- Programs mode: a maximum of 1000 recipes can be stored in the oven's memory, to replicate the same results at any time. The recipes can be grouped in up to 16 different categories to help organize the menu. Possible to save programs with up to 16-phases (steps) each.
- Automatic mode: by choosing family and food type, the oven automatically selects the appropriate cooking climate, temperature and time. A maximum of 60 personalized preset can be saved per family. Three special automatic cycles available:
 - Low Temperature Cooking cycle (LTC) PATENTED: ideal for large cuts of meat, to minimize weight loss and maximize food quality.
 - Regenerating cycle: efficient humidity management for fast and easy rethermalization, both on plate as well as on tray.
 - Proofing cycle: uses the air-o-clima™ function manages temperature and humidity to create the perfect proofing conditions.
- air-o-clima™ PATENTED: Lambda sensor controlled, automatic humidity adjustment of cooking environment based on settings for perfect textures and repeatability.
- MultiTimer function to manage a sequence of up to 14 different cooking cycles, improving flexibility and ensuring excellent cooking results. Can be saved up to 70 MultiTimers Programs.
- air-o-flow: fresh air from the outside is directed to the bi-functional fan, becomes pre-heated and then pushed into the cooking chamber to guarantee an even cooking process.
- 6-point multi sensor core temperature probe for maximum precision and food safety.
- Fan speeds: full, half speed and pulse. Full speed active as default. Half speed ideal for delicate cooking such as baking. Pulse ideal for low weight loss and for keeping food warm at the end of the cooking cycle.
- Food Safe Control (FSC) PATENTED monitors the cooking process to comply with HACCP standards. HACCP management to record cooking procedure available upon request.
- USB connection: to download HACCP and FSC data, upload the recipes and interface setting.
- Sous-vide USB probe to ensure excellent cooking results even with vacuum-packed products (optional accessory).

Electrolux Professional, Inc.

www.electroluxusa.com/professional

10200 David Taylor Drive, Charlotte, NC 28262 • Telephone Number: 866-449-4200 • Fax Number: 704-547-7401



Electrolux

air-o-steam
air-o-steam TOUCHLINE
Electric Combi Oven 101

- air-o-clean™ automatic and built-in self cleaning system (4 automatic) with "Green" functions to save energy, water and rinse aid.
- Guided descaling function to guide operator during boiler descaling phase (from "Setting" mode).
- Supplied with n.1 tray rack, 2 1/2" 65mm pitch.
- Electrolux Platinum Star® Service package included:
 - 2-year parts, 1-year labor warranty
 - Start-up installation check
 - Equipment check-up after 12 months from installation.
- ETL safety approved, complies with UL 197 and CSA 22.2 listings.
- ETL sanitation approved, complies with NSF/ANSI 2 listing.

Construction

- 304 AISI stainless steel construction throughout.
- Double thermo-glazed door with open frame construction, for cool outside door panel. Swing hinged easy-release inner glass on door for easy cleaning.
- IPX 5 spray water protection certification for easy cleaning.
- Seamless hygienic cooking chamber with all rounded corners for easy cleaning.
- Swing hinged front panel for easy service access to main components.



Electrolux

air-o-steam
air-o-steam TOUCHLINE
Electric Combi Oven 101

Included Accessories

- 3 of Single 304 stainless steel grid (12"x20") PNC 922062

Optional Accessories

- Exhaust hood without fan for 6&10 1/1GN ovens. It is mandatory to use the flue condenser (640413) on installation with gas ovens PNC 640791 ☐
- Exhaust hood with fan for 6&10x1/1 GN ovens. It is mandatory to use the flue condenser (640413) on installation with gas ovens PNC 640792 ☐
- Odourless hood for air-o-steam/air-o-convect 6GN1/1 and 10GN1/1, electric (only for 267282) PNC 640796 ☐
- Automatic water softener for ovens PNC 921305 ☐
- Resin sanitizer for water softener PNC 921306 ☐
- Wheel kit for base for 61, 62, 101 and 102 oven bases PNC 922003 ☐
- Trolley for rack cassette for 61 and 101 oven PNC 922004 ☐
- 10 rack cassette (wheel kit included) for 101 oven (standard pitch) PNC 922006 ☐
- 8 rack cassette (wheel kit included) for 101 oven (Increased pitch) PNC 922009 ☐
- Kit - 4 adjustable feet for 61, 62, 101, 102 ovens PNC 922012 ☐
- Thermal blanket for 101 racks PNC 922013 ☐
- Mobile banqueting rack for 101 with 2 1/2" (65 mm) pitch, 30 plates (should be ordered with 1 each PNC 922074) PNC 922015 ☐
- Pair of half size oven racks, type 304 stainless steel PNC 922017 ☐
- Tray support for 61 and 101 oven bases PNC 922021 ☐
- Chicken racks, pair (2) (fits 8 chickens per rack) PNC 922036 ☐
- Mobile banqueting rack for 101 with 3 1/3" (85 mm) pitch, 23 plates (should be ordered with 1 each PNC 922074) PNC 922071 ☐
- Wheels and Hinges kit for 6 and 10 oven PNC 922073 ☐
- Slide-in rack support with handle for 61 and 101 oven PNC 922074 ☐
- Stainless steel 304 grids (GN 1/2) with spikes, fits 4 chickens PNC 922086 ☐
- GN 1/1 (12" x 20") tray made of aluminium alloy with no-stick coating, 3/4" (20 mm) deep PNC 922090 ☐
- GN 1/1 (12" x 20") tray made of aluminium alloy with no-stick coating, 1 1/2" (40 mm) deep PNC 922091 ☐
- GN 1/1 (12" x 20") tray made of aluminium alloy with no-stick coating, 2 1/2" (65 mm) deep PNC 922092 ☐
- Tray rack with 11 tray guides and reinforcement for 101 oven (should be ordered with 1 each PNC 922287) PNC 922099 ☐
- Kit to connect external rinse aid and detergent tank for 61, 62, 101, and 102 ovens PNC 922169 ☐
- External side spray unit (needs to be mounted outside and includes support for mounting to oven) PNC 922171 ☐
- Fat filter for 101 and 102 oven PNC 922178 ☐
- Open base with rack guides for 61 and 101 oven PNC 922195 ☐
- Basket for detergent tank (wall mounted) PNC 922209 ☐
- Holder for detergent tank on open base PNC 922212 ☐
- GN 1/1 (12" x 20") frying griddle, made of aluminium alloy with no-stick coating PNC 922215 ☐
- Cupboard base and tray support for 61 and 101 oven (only for 267322) PNC 922223 ☐
- Hot cupboard base with humidifier for 6&10x1/1GN ovens, with support for 1/1GN and 600x400mm trays (only for 267322) PNC 922227 ☐


- Pair of frying baskets PNC 922239 ☐
- Heat shield for 61 on top of 101 oven stacking kit PNC 922245 ☐
- Heat shield for 101 oven PNC 922251 ☐
- Double-click closing catch for oven door PNC 922265 ☐
- Grid for whole chicken 1/1GN (8 per grid - 1,2kg each) PNC 922266 ☐
- Electronic Board for HACCP through PC Network, for air-o-steam and air-o-convect Ovens PNC 922275 ☐
- USB Probe for sous-vide cooking (only for Touchline oven) PNC 922281 ☐
- Drain kit (diameter 2") for 61, 62, 101, 102 ovens PNC 922283 ☐
- Pastry runners (400x600 mm) for 6 & 10 GN1/1 oven bases PNC 922286 ☐
- Trolley for grease collection with specific grease drip tray for 101 oven (should be ordered with 1 each PNC 922099) PNC 922287 ☐
- Baguette tray (holds 4), made of perforated aluminium, silicon coated, GN1/1 (12" x 20") PNC 922288 ☐
- Oven grill made of aluminium alloy with no-stick coating PNC 922289 ☐
- GN 1/1 (12" x 20") egg fryer grid, made of aluminium alloy with no-stick coating. Fits 8 eggs PNC 922290 ☐
- Kit bakery rack for 101 oven (only for 267322) PNC 922292 ☐
- GN 1/1 (12" x 20") baking sheet, made of aluminium alloy with no-stick coating PNC 922299 ☐
- GN 1/1 (12" x 20") potato baker grid (holds 28 potatoes) PNC 922300 ☐
- GN 1/2 (10" x 12") tray made of aluminium alloy with no-stick coating, 3/4" (20 mm) deep PNC 922308 ☐
- GN 1/2 (10" x 12") tray made of aluminium alloy with no-stick coating, 1 1/2" (40 mm) deep PNC 922309 ☐
- GN 1/2 (10" x 12") tray made of aluminium alloy with no-stick coating, 2 1/2" (65 mm) deep PNC 922310 ☐
- Stacking Kit: 61 on top of 61 or 101 electric ovens PNC 922319 ☐
- Kit flaged feet PNC 922320 ☐
- Fat collection tray PNC 922321 ☐
- Trolley for slide-in rack 10x1/1GN PNC 922323 ☐
- Universal skewer pan for ovens (TANDOOR) PNC 922326 ☐
- 4 long (24") skewers for ovens (TANDOOR) PNC 922327 ☐
- Fat collection tray for ovens (1.5") PNC 922329 ☐
- NPT adaptor 1 1/4" gas for ovens PNC 922332 ☐
- Wheels for stacked ovens (61 on 61 ovens, or 61 on 101 ovens) PNC 922333 ☐
- Smoker for ovens PNC 922338 ☐
- Kit check valve PNC 922347 ☐




Electrolux

air-o-steam air-o-steam TOUCHLINE Electric Combi Oven 101

Front

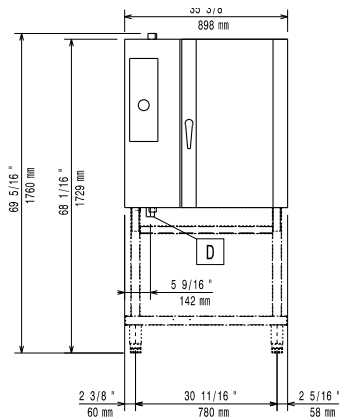


Top

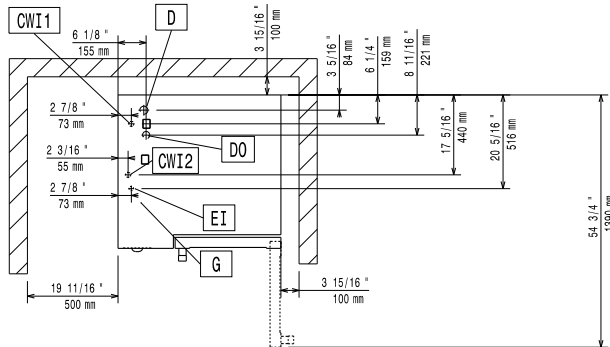

- CWI** = Cold Water inlet
- D** = Drain
- EI** = Electrical connection

Side

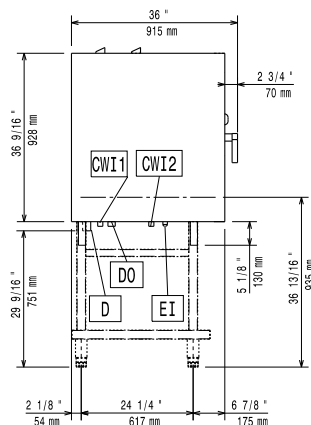

Electric

Supply voltage:

267282 (AOS101ETM1)	208 V/3 ph/60 Hz
267322 (AOS101ETV1)	480 V/3 ph/60 Hz

Amps:

267282 (AOS101ETM1)	46 A
267322 (AOS101ETV1)	20 A

Connected load:

16.5 kW

Circuit breaker required

Water:

Water inlet "CW" connection:

3/4"

5-50ppm (boiler/steam – rear connection) less than 400ppm (cleaning/quenching - front connection)

Hardness:

Water consumption (gal./hr.):

Min: 2.25 Max: 11.89

Pressure:

22-36 psi (1.5-2.5 bar)

Drain "D":

1"1/4

Conductivity:

(50-200 µs/cm)

Chlorides:

(must be less than 20 ppm)

PH:

(must be greater than 7)

Electrolux recommends the use of treated water, based on testing of specific water conditions.

Please refer to user manual for detailed water quality information

It is obligatory upon the end-user to supply the combi with water that conforms to the specifications attached on the spec sheet. A properly sized system combined with a disciplined filter replacement regimen will ensure the maximum life of the oven.

Installation:

Clearance:

2" rear and right hand sides

Suggested clearance for service access:

20" left hand side.

Capacity:

Steam pans:

10 - 12" x 20"

Half size sheet pans:

10 - 13" x 18"

GN:

10 - 1/1 Gastronorm

Max load capacity:

110 lbs. (50 kg)

Key Information:

Net weight:

359 lbs (163 kg)

Shipping width:

37 5/8" (955 mm)

Shipping depth:

38 3/4" (985 mm)

Shipping height:

49 13/16" (1265 mm)

Shipping weight:

403 lbs (183 kg)

Shipping volume:

42.02 ft³ (1.19 m³)

air-o-steam
air-o-steam TOUCHLINE Electric Combi Oven 101

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2014.07.01