

### TECHNICAL DATA SHEET FOR G32D5 DOUBLE STACKED

#### Full Size Digital / Gas Convection Ovens Double Stacked on a Stainless Steel Base Stand

G32D5/2 - Double stack with adjustable feet base stand  
G32D5/2C - Double stack with castor base stand

##### DOUBLE STACK FEATURES

- Two 5 full size sheet pan capacity ovens
- Compact 28<sup>7</sup>/<sub>8</sub>" / 735mm width
- Full stainless steel base stand
- Full stainless steel oven spacer frame
- Adjustable feet or castor models

##### OVEN FEATURES (each)

- 3<sup>1</sup>/<sub>8</sub>" / 85mm tray spacing
- 110-120V plug-in
- 15A NEMA 5-15P cordset fitted
- Digital display Time and Temperature Controls
- Large easy view 3<sup>3</sup>/<sub>4</sub>" / 20mm high displays
- Electronic thermostat control
- Electronic burner ignition and safety control system
- Electronic timer with countdown or time count modes

##### **NEW** Manual mode and Program mode

##### **NEW** 20 programs with 3 stage cooking and stage end alarms

##### **NEW** Core Probe program cooking (optional Core Probe Kit)

- Moisture injection mode (5 levels) and manual injection
- Bi-directional reversing fan system
- 33,000 Btu/hr patented Infrared burner system
- Safe-Touch vented side hinged door (standard LH hinge). Optional RH hinge (field convertible)
- Stay-Cool door handle
- Porcelain enameled oven chamber
- Plug-in continuous oven door seal
- Dual halogen oven lamps
- 5 oven wire racks supplied

##### ACCESSORIES

- Optional M236060 Core Temp Probe Kit



**THE ADVANTAGE**

Model G32D5/2C shown

##### G32D5/2 G32D5/2C

G32D5 ovens shall be Moffat gas heated Turbofan convection ovens NSF-4 and CSA listed. The ovens shall have a one piece porcelain enameled oven chamber, stainless top and sides and safe touch vented easy clean side hinged door that offers field reversible hinging. Ovens shall have capacity for five full size sheet pans each. The ovens shall be controlled by an electronic control having separate digital displays and adjusting knobs for time and temperature functions. The oven control shall allow both manual and programmed operating modes with programmable moisture injection and 3 stage cooking. A core temperature probe M236060 is optional. The units shall include dual halogen oven lamps. Ovens shall be fitted with a NEMA 5-15P cordset. Ovens shall be double stacked using Double Stacking Kits DSKG32 (adjustable feet option) or DSKG32C (castor option). Units shall be supplied in 100% recyclable shipping packaging.

Double stack models are supplied as two individual ovens and a double stacking kit for field assembly.

# 30D SERIES

G32D5/2  
G32D5/2C

# turbofan®

## G32D5/2 G32D5/2C Full Size Digital / Gas Convection Ovens Double Stacked on a Stainless Steel Base Stand

### CONSTRUCTION - OVENS

Porcelain enameled fully welded oven chamber  
Stainless steel front, sides and top exterior  
Stainless steel oven fan baffle  
Removable 5 position stainless steel side racks  
Oven racks chrome plated wire (5 supplied)  
Stainless steel frame side hinged door  
0.2" / 5mm thick door outer glass  
0.2" / 5mm thick low energy loss door inner glass  
Full stainless steel welded door handle  
Stainless steel control panel  
Aluminized coated steel base and rear panels

### CONSTRUCTION - DOUBLE STACKING KIT

All stainless steel construction  
Welded 1½" square base stand  
4 adjustable feet on G32D5/2  
4 dia. 3" / 76mm swivel castors with 2 front castors dual wheel and swivel lock on G32D5/2C  
Stainless steel oven spacer frame  
Aluminized steel bottom oven flue extension

### CONTROLS (each oven)

Electronic controls with Digital Time and Temperature display, Manual or Program modes  
Large ¾" / 20mm high LED displays  
Two individual time and temperature setting control knobs  
ON/OFF key  
Oven Lights key  
Timer Start/Stop key  
Moisture Injection key (5 levels)  
Programs select key  
Actual temperature display key  
Adjustable buzzer/alarm volume  
Thermostat range 150-500°F / 50-260°C  
Timer range from 180 minutes in countdown mode  
Timer range up to 999 minutes in time count mode for holding, slow cooking  
Direct burner ignition control flame failure safety control  
Optional Core Probe temperature range 122-194°F / 50-90°C  
Over-temperature safety cut-out

### CLEANING

Stainless steel top and side exterior panels  
Porcelain enameled oven chamber  
Fully removable stainless steel oven side racks  
Removable stainless steel oven fan baffle  
Easy clean door system with hinge out door inner glass (no tools required)  
Removable plug-in oven door seal (no tools required)

### SPECIFICATIONS

Electrical Requirements (each oven)  
110-120V, 60Hz, 1-phase, 1A  
NEMA 5-15P cordset fitted



### Gas Requirements (each oven)

33,000 Btu/hr / 35MJ/hr burner rating  
Natural, Propane/Butane models  
Unit supplied complete with gas type conversion kit

### Gas Connection (each oven)

½" NPT male

### Water Requirements (optional - each oven)

Cold water connection ¾" GHT male  
80psi maximum inlet pressure / 20psi minimum inlet pressure

### External Dimensions

Width 28 7/8" / 735mm  
Height 71 1/4" / 1810mm  
Depth 33 3/4" / 856mm

### Oven Internal Dimensions (each oven)

Width 18 1/4" / 465mm  
Height 20 1/4" / 515mm  
Depth 27 1/2" / 700mm  
Volume 6ft³ / 0.17m³

### Oven Rack Dimensions

Width 18" / 460mm  
Depth 26" / 660mm

### Nett Weight (double stack complete)

546lbs / 248kg

### Packing Data

#### Ovens (G32D5 each)

289lbs / 131kg  
25ft³ / 0.71m³

#### Stacking Kit

47lbs / 22kg (DSKG32)  
51lbs / 23kg (DSKG32C)  
5.8ft³ / 0.16m³ (DSKG32)  
4.1ft³ / 0.12m³ (DSKG32C)

Width 29 7/8" / 760mm

Height 39 3/4" / 1010mm

Depth 36 3/8" / 925mm

Width 30 3/8" / 770mm

Height 35" / 890mm

Depth 9 1/2" / 240mm (DSKG32)

6 3/4" / 170mm (DSKG32C)

Supplied CKD for assembly on site

### INSTALLATION CLEARANCES

	NON-COMBUSTIBLE SURFACES	COMBUSTIBLE SURFACES
Rear	3" / 75mm	3" / 75mm
LH Side	2" / 50mm	2" / 50mm
RH Side*	3" / 75mm	3" / 75mm

\* For fixed installations a minimum of 20" / 500mm is required for service

### CLEARANCE FROM SOURCES OF HEAT

A minimum distance of 12" / 300mm from the appliance sides is required

### Double Stacking Kits

For after market double stacking two G32D5 convection ovens  
DSKG32 - Double stacking kit - adjustable feet  
DSKG32C - Double stacking kit - castor

## MOFFAT®

www.moffat.com

U.S.A.

Moffat Inc  
3765 Champion Boulevard

Winston-Salem

North Carolina 27105

Ph Toll Free 1-800-551 8795

Ph 336-661 0257

Fax 336-661 9546

Email sales@moffat.com

www.moffat.com

Manufactured by:

Moffat Limited

16 Osborne Street PO Box 10-001

Christchurch 8081 New Zealand



ISO9001  
Quality  
Management  
Standard

Designed and manufactured by


## MOFFAT®

ISO9001

All Turbofan products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd  
Moffat 1419 / 7.14

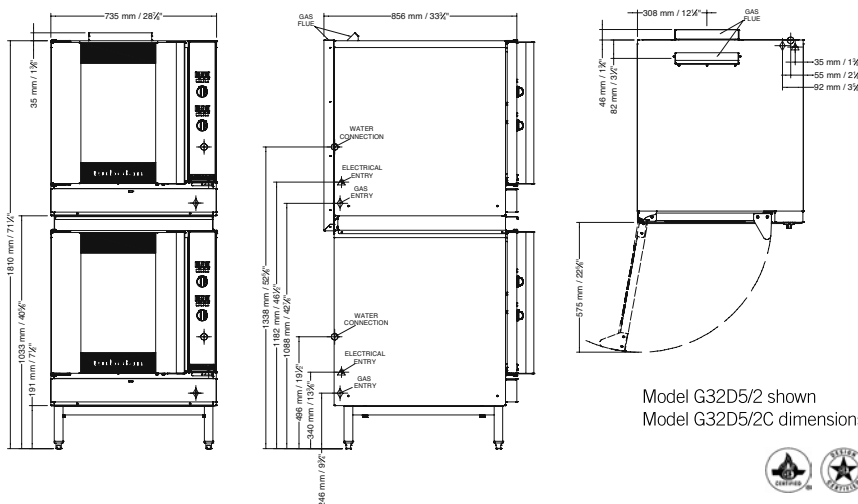

Model G32D5/2 shown  
Model G32D5/2C dimensions are the same

