

NOR-LAKE, INCORPORATED
727 Second Street
P.O. Box 248
Hudson, Wisconsin 54016

800-955-5253
715-386-2323
866-961-5253 Parts
800-388-5253 Service
715-386-4291 FAX
www.norlake.com



DUAL ACCESS MILK COOLERS



AR124-A



PROJECT:

ITEM NUMBER:

MODEL NUMBER:

SPECIFICATIONS FOR: AR084-A, AR124-A & AR164-A

- **Exterior Finish:** The self-service doors are stainless steel, the remaining exterior is white enamel over smooth steel. The remaining exterior is available in stainless steel as an option (shown).
- **Interior Finish:** The self-service doors and the remaining interior are galvanized steel. Stainless steel interior is available as an option.
- **Insulation:** The cabinet is insulated with 2 inches of foamed-in-place polyurethane insulation.
- **Hardware:** The milk coolers are equipped with easy roll, locking swivel casters and heavy duty floor racks. The gasketed, insulated doors with stainless steel hinges open for small child self service, close and lock. Door hold open feature secures door during serving. A drain is standard with every unit.
- **Instrumentation:** Thermometer measures temperature in °F.
- **Refrigeration:** Self contained R-134A refrigeration system. The evaporator is a cold wall evaporator in the cabinet with no moving parts which allows more room for product. The condenser is an air cooled, copper tube and aluminum finned coil which is mounted on the base of the unit. Adjustable temperature control to optimize product temperatures. Operating temperature: 38°F.
- **Electrical:** 115 volt, 60 Hz, 1 phase with cord and plug.
- **Performance:** Designed with a powerful refrigeration system which provides large capacity. This enables the unit to quickly pull product down to the storage temperature and maintain it.
- **Capacity:**

	Cases with Cartons				Loose Carton (without cases)			
	13 x 13 x 11H		19 x 13 x 11H		Flat Top		Peaked Top (Gable)	
	Cases	Cartons	Cases	Cartons	1/2 Pt.	1 Pt.	1/2 Pt.	1 Pt.
AR084-A:	8	352	4	288	864	432	680	430
AR124-A:	12	528	8	576	1368	684	1020	645
AR164-A:	16	704	12	864	1800	900	1360	860
- **Dual Access:** One unit will supply two serving lines.

STANDARD FEATURES

- Adjustable temperature control
- Air-cooled condensing unit
- Cold wall evaporator
- Dual access
- Exterior stainless steel doors
- Fold back doors
- Four swivel casters, two locking
- Gasketed locking doors
- Heavy duty epoxy coated floor racks
- Interior galvanized steel
- Key locks
- NSF listed thermometer
- NSF listed drain
- Operating temperature: 38°F
- Power cord and plug furnished
- Stainless steel exterior
- Stainless steel interior
- Stocked for same day shipment
- UL, C-UL, UL Sanitation and ENERGY STAR® listed**
- Warranties: 3 year parts and labor, 5 year construction, 5 year compressor

OPTIONAL FEATURES*

- Corner bumpers
- Laminate for top, front, sides and back
- White exterior with galvanized interior




Nor-Lake, Inc.
Registered to ISO 9001:2008
File No. 10001816

*Most options are available one week from receipt of order. Please contact us for specific questions.
**C-UL is Underwriters Laboratories Safety Certification Mark which indicates that UL has tested the equipment to applicable CSA Standards.
**UL Sanitation is Underwriters Laboratories Sanitation Mark which indicates that UL has tested the equipment to applicable NSF Standards.

DUAL ACCESS MILK COOLERS


SPECIFICATION
GUIDE

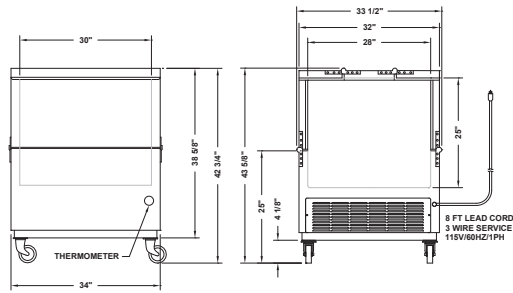


FRONT

AR084-A

SIDE




TOP




TOP

AR124-A

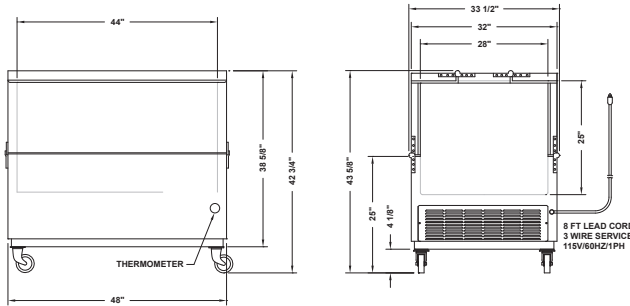


FRONT

SIDE



TOP

AR164-A

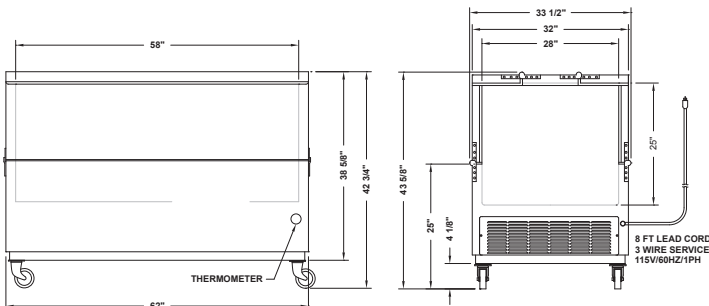

FRONT

SIDE

SPECIFICATIONS

Model	AR084-A	AR124-A	AR164-A
Crated Height	43"	43"	43"
Crated Width	37-1/2"	51-1/2"	65-1/2"
Crated Depth	36"	36"	36"
Crated Weight (lbs.)	326	352	484
Interior Height	25"	25"	25"
Interior Width	30"	44"	58"
Interior Depth	28"	28"	28"
Overall Height	43-5/8"	43-5/8"	43-5/8"
Overall Width	34-5/8"	48-5/8"	62-5/8"
Overall Depth	33-1/2"	33-1/2"	33-1/2"
Gross Cubage (ft. ³)	12.2	17.8	23.5
Number of Floor Racks	2	3	4
Number of Casters	4	4	4
Condensing Unit Size	1/5 HP	1/5 HP	1/5 HP
Refrigerant	R-134a	R-134a	R-134a
Electrical Characteristics	115/60/1	115/60/1	115/60/1
Cord and Plug Furnished	Yes	Yes	Yes
Nema Plug Configuration	5-15P	5-15P	5-15P
Total Amp Draw	3.3	3.3	3.4

Specifications subject to change without notice.



Revision Date: 04/13
 © 2013 NOR-LAKE, INC.
 Printed in the U.S.A.
 Part Number: 095157

