

ADVANTEDGE™ REACH-IN REFRIGERATORS



NLR23-S

NLR49-S

NLR72-S



PROJECT:

.....

ITEM NUMBER:

.....

MODEL NUMBER:

.....

1, 2 & 3 DOOR REFRIGERATORS

SPECIFICATIONS FOR: NLR23-S, NLR49-S, NLR72-S

- **Exterior finish:** Exterior front sides and doors are stainless steel. Exterior top, bottom and back are galvanized steel.
- **Interior finish:** Interior liner and interior door panel are stainless steel.
- **Insulation:** The complete cabinet and door(s) are foamed-in-place with polyurethane foam insulation.
- **Hardware:** Heavy duty, pivot hinges; key locks; curved handle with recessed pocket; self adjusting magnetic gaskets; 4" dia. casters (4 casters on one and two door models and 6 casters on three door model). 4 vinyl coated shelves per door section - standard.
- **Electrical:** An interior incandescent light is activated by a switch for each door.
- **Instrumentation:** Microprocessor with digital display allows temperature adjustment at control panel.
- **Refrigeration:** Complete bottom mounted refrigeration system with a copper tube, ceiling mount aluminum fin evaporator. The condensate is collected and automatically evaporated from an energy efficient air over wick style vaporizer. Drain line is recessed in cabinet back. Refrigerant flow is controlled by a capillary tube. R-134a refrigerant. Operating temperature: +36°F.
- **Approvals:** UL, C-UL, ETL Sanitation and ENERGY STAR® listed **

STANDARD FEATURES

- Air-cooled condensing unit
- Automatic condensate vaporizer
- Automatic defrost
- Casters
- Capillary tube system
- Curved handle with recessed pocket
- Door open alarm
- Interior light
- Key locks
- Magnetic gasket
- Microprocessor with digital display
- Operating temperature: +36°F
- Polyurethane insulation
- R-134a refrigerant
- Stainless steel interior and exterior
- Vinyl coated shelves
- UL, C-UL, ETL Sanitation & ENERGY STAR® listed **
- Warranties: 3 year parts and labor, 5 year compressor

OPTIONAL FEATURES*

- Extra shelves
- Field reversible hinge kit for single door models (part # 146524)
- Pan slide rack (part # 146515)




Nor-Lake, Inc.
 Registered to ISO 9001:2008
 File No. 10001816


* Most options are available two weeks from receipt of order. Please contact us for specific questions.

** C-UL is Underwriters Laboratories Safety Certification Mark which indicates that UL has tested the equipment to applicable CSA Standards.


** UL-Sanitation is Underwriters Laboratories Safety Certification Mark which indicates that UL has tested the equipment to applicable NSF Standards.




NLR23-S Top View




NLR49-S Top View

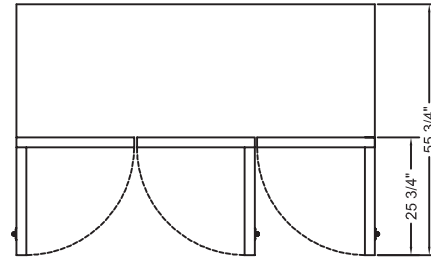


NLR72-S Top View

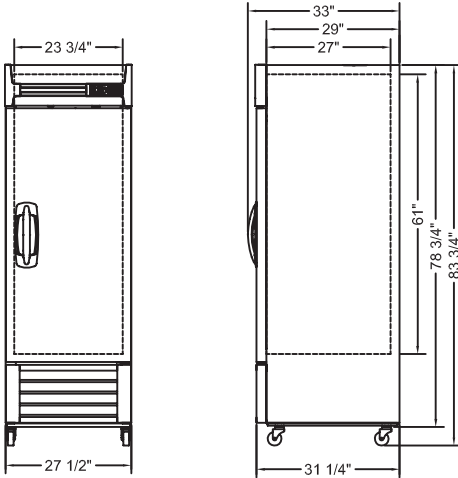

NLR23-S Front and Side Views

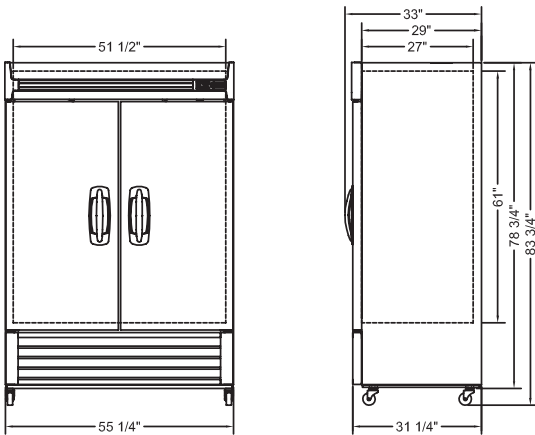

NLR49-S Front and Side Views

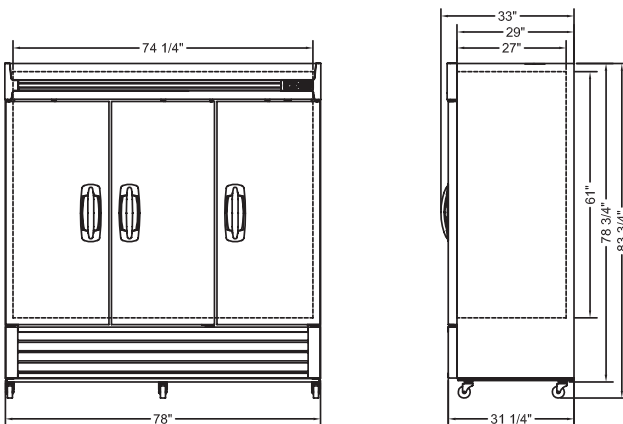

NLR72-S Front and Side Views

SPECIFICATIONS

Models	NLR23-S	NLR49-S	NLR72-S
Crated Height	84- 1/4"	84-1/4"	84-1/4"
Crated Width	29- 1/8"	56-3/4"	78- 3/8"
Crated Depth	33/ 1/2"	33-1/2"	33-1/2"
Crated Weight (lbs)	297	451	607
Interior Height (in)	61"	61"	61"
Interior Width (in)	23- 3/4"	51-1/2"	74- 1/4"
Interior Depth (in)	27"	27"	27
Overall Height (in)*	83- 3/4"	83-3/4"	83- 3/4"
Overall Width (in)	27- 1/2"	55-1/4"	78"
Overall Depth (in)	33"	33"	33"
Gross Cubage (ft. ³)	23	49	70
Number of Shelves	4	8	12
Number of Casters	4	4	6
Condensing Unit Size	3/8 HP	3/8 HP	1/2 HP
Refrigerant	R-134a	R-134a	R-134a
Electrical Characteristics	115/60/1	115/60/1	115/60/1
Cord & Plug Furnished	Yes	Yes	Yes
NEMA Plug Configuration	5-15P	5-15P	5-15P
Total Amp Draw	7.5	7.5	10

Specifications subject to change without notice.

* The overall heights shown in the table and drawings are with casters.



NORLAKE[®]

Revision Date: 03/13
 © 2013 NOR-LAKE, INC.
 Printed in the U.S.A.
 Part Number: 138688

Standex
 Food Service Equipment Group