



## REMOTE BACK BAR REFRIGERATOR 1, 2, 3 & 4 DOOR (STANDARD)



BBR96 shown


JOB	
AREA	
ITEM NO.	
MODEL NO.	

BBR24	1-Door Model
BBR48	2-Door Model
BBR72	3-Door Model
BBR96	4-Door Model



MODEL NUMBERS		BBR24	BBR48	BBR72	BBR96
NUMBER OF DOORS		1	2	3	4
EXTERIOR CABINET DIMENSIONS	Length - in. (mm)	24" (610mm)	48" (1219mm)	72" (1829mm)	96" (2438mm)
	Depth - in. (mm)	24.75" (629mm)	24.75" (629mm)	24.75" (629mm)	24.75" (629mm)
	Height - in. (mm)	34.565" (878mm)	34.565" (878mm)	34.565" (878mm)	34.565" (878mm)
INTERIOR CABINET DIMENSIONS	Length - in. (mm)	20" (508mm)	44" (1118mm)	68" (1727mm)	92" (2337mm)
	Depth - in. (mm)	18.75" (476mm)	18.75" (476mm)	18.75" (476mm)	18.75" (476mm)
	Height - in. (mm)	28.5" (724mm)	28.5" (724mm)	28.5" (724mm)	28.5" (724mm)
INTERNAL VOLUME Net. Cu. Ft. (Litres)		7.0 (198lt)	15.3 (433lt)	23.9 (677lt)	32.6 (923lt)
SHIPPING WEIGHT Lbs. (kg.)		162# (73kg)	286# (130kg)	386# (175kg)	527# (239kg)
ELECTRICAL SPECIFICATIONS	Electrical Supply	120 VAC/60 Hz/1 Ph	120 VAC/60 Hz/1 Ph	120 VAC/60 Hz/1 Ph	120 VAC/60 Hz/1 Ph
	Running Load Amps	1.1	1.6	2	2.5
	Electrical Connection	Hard Wired	Hard Wired	Hard Wired	Cord Connected
	Defrost Initiation	Automatic	Automatic	Automatic	Automatic
	Defrost Type	Off Cycle	Off Cycle	Off Cycle	Off Cycle
	Lighting Type	LED	LED	LED	LED
REFRIGERATION SPECIFICATIONS	Evaporator Capacity-Remotes	900 Btu/Hr @ 20° F Evaporator	1900 Btu/Hr @ 20° F Evaporator	2300 Btu/Hr @ 20° F Evaporator	2300 Btu/Hr @ 20° F Evaporator
	Remote Refrigerant Options	R134a & R22 & R404a	R134a & R22 & R404a	R134a & R22 & R404a	R134a & R22 & R404a
PLUMBING	Floor Drain Included	Yes	Yes	Yes	Yes
	Evaporator Condensate	Field Plumbed	Field Plumbed	Field Plumbed	Field Plumbed

# REMOTE BACK BAR REFRIGERATOR 1, 2, 3 & 4 DOOR (STANDARD)

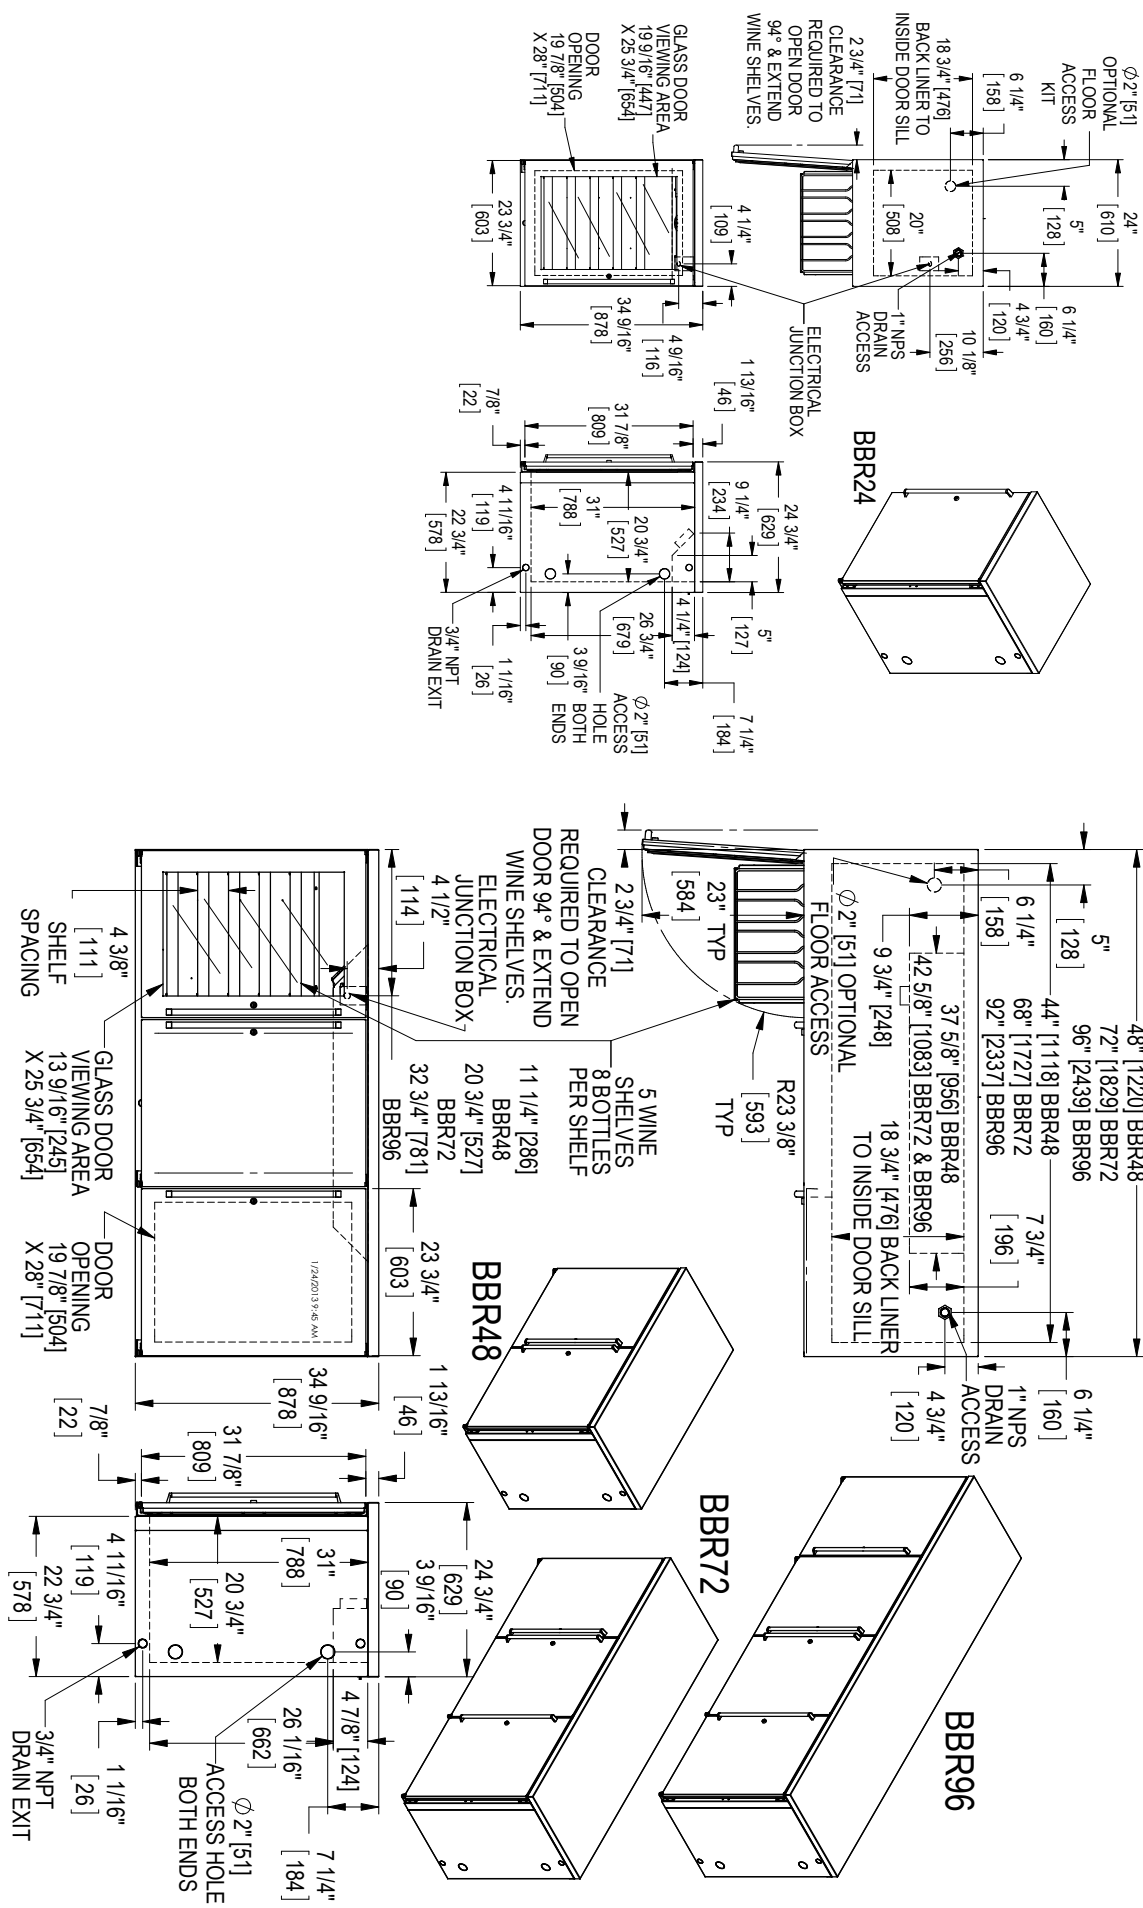

8300 West Good Hope Road, Milwaukee, WI 53223  
 (800) 558-5592 • perlick.com