

## Product Specifications

### Heated Case Self-Service

Lengths include end panels

- GHSS460H      51"L x 31-7/8"D x 60"H
- GHSS660H      75-3/8"L x 31-7/8"D x 60"H



MODEL SHOWN: GHSS660H

NOTE: CHICKEN CONTAINER CAPACITIES: GHSS460H=(34), GHSS660H=(46)

### STANDARD FEATURES


- Designed for dry heat
- Integrated average product temperature of 160°F
- One year parts & labor warranty
- Stainless steel interior

Features	Standard	Options
EXTERIOR COLOR	<input type="checkbox"/> Laminated (non-premium) Confirm pattern/grain direction	<input type="checkbox"/> Laminated (premium) Confirm pattern/grain direction <input type="checkbox"/> Stainless steel
TOP PANEL COLOR	<input type="checkbox"/> Painted - Black	<input type="checkbox"/> Stainless steel
BASE	<input type="checkbox"/> Rail system for shims	<input type="checkbox"/> 6"H legs
END PANEL LEFT	<input type="checkbox"/> Full end panel w/mirror interior	<input type="checkbox"/> Cutaway with glass
END PANEL RIGHT	<input type="checkbox"/> Full end panel w/mirror interior	<input type="checkbox"/> Cutaway with glass
LOWER FRONT PANEL	<input type="checkbox"/> Painted - Black	<input type="checkbox"/> Stainless steel
UPPER REAR	<input type="checkbox"/> Solid back panel, stainless steel	<input type="checkbox"/> Reflective glass rear sliding doors <input type="checkbox"/> Solid back panel, black
SHELVING	<input type="checkbox"/> Solid heated shelves, lighted	<input type="checkbox"/> Additional solid heated shelf, lighted
ELECTRICAL ACCESS	<input type="checkbox"/> Front electrical access	<input type="checkbox"/> Rear electrical access
ELECTRICAL CONNECT	<input type="checkbox"/> Terminal block	<input type="checkbox"/> 6' straight blade power cord (self cont.)
MISCELLANEOUS		<input type="checkbox"/> Second year parts & labor warranty


## Product Specifications

<b>Intended Environment:</b> Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.	
<b>Zone</b>	<b>Integrated Prod Temp ° F</b>
All	160

PLAN VIEW

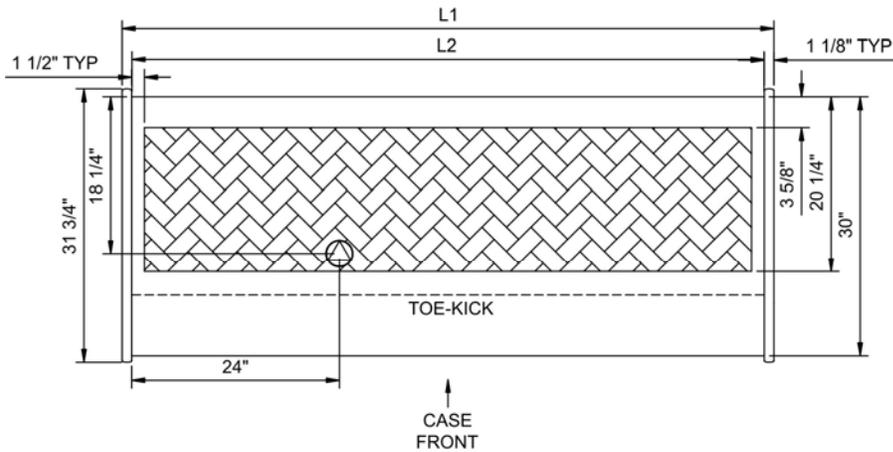

SIDE VIEW

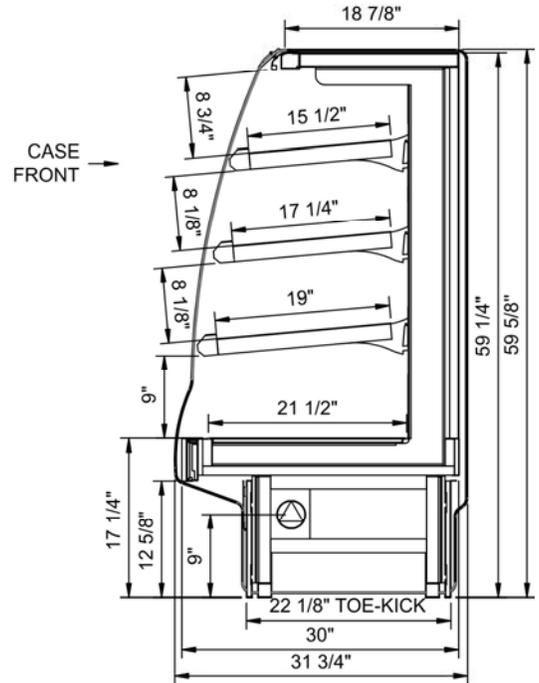

NOTE: ALL DIMENSIONS APPROXIMATE

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
- LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

- REFRIGERATION LINE CONNECTION.
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications

Model	L"	L1"	L2"	System Circuit Volts	Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	BTUH	Ship Wt	Frt Cls		
GHSS460H	N/A	51.00	.00	Heat	Circuit #1	208	1	50-60	30.90	5,631	2+G	Leads Single	N/A	850	110	
						240	1	50-60	35.10	7,497	2+G	Leads Single	N/A			N/A
						208	3	50-60	20.60	5,631	3+G	Leads Single	N/A			N/A
						240	3	50-60	23.80	7,497	3+G	Leads Single	N/A			N/A
GHSS660H	N/A	75.38	.00	Heat	Circuit #1	208	1	50-60	43.80	8,044	2+G	Leads Single	N/A	1,180	110	
						240	1	50-60	49.80	1,071	2+G	Leads Single	N/A			N/A
						208	3	50-60	30.90	8,044	3+G	Leads Single	N/A			N/A
						240	3	50-60	35.70	1,071	3+G	Leads Single	N/A			N/A

\*\*\* Does not include electric defrost on freezer models.

Regulatory Approvals:	
All Models	ETL Listed to UL 197 ETL Listed to CAN/CSA 22.2 No. 109 UL Sanitation to NSF Std 4

Important Notes:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) 32" minimum door entry clearance required (without shipping skid).

