



Outperform every day.™

Project:

Item Number:

Quantity:

Induction Range: Mirage® Pro Countertop

The Vollrath Company, L.L.C.

INDUCTION RANGE: MIRAGE® PRO COUNTERTOP



Mirage® Pro 59500P Countertop Induction Range

DESCRIPTION

The ultra-low profile, portable countertop induction range is designed for use in light to medium duty front-of-the-house cooking. Models 59500P and 59510P will plug into standard, dedicated 15A outlets which are readily available in most restaurants and kitchens.

The induction range comes complete with a 6-ft. (183 cm) power cord and plug. The case frame is made from heavy-duty, 18-gauge stainless steel with a ceramic top. The ceramic top is easily cleaned with a mild cleaner.

The induction ranges are equipped with a variety of safety features including:

- Over-heat protection
- Small-article detection
- Pan auto-detection function
- Empty-pan shut-off
- Safety auto-shut-off function

Agency Listings — 59500P



This device complies with Part 18 FCC Rules.

Agency Listings — 59510P



This device complies with Part 18 FCC Rules.

Due to continued product improvement, please consult www.vollrath.com for current product specifications.

MODELS

59500P 1.8kW @ 120V (US only)

59510P 1.4kW @ 120V (US and Canada)

FEATURES

- Next generation G4 engine with 4 IGBT switches for improved durability and temperature control
- Full two-year parts and labor warranty
- 100 power levels with optimum power output to a wide variety of induction-ready cookware
- 1-100 power levels or °F/°C temperature level controls
- 90% efficiency rating
- Enhanced troubleshooting display
- 1-180 minute timer
- Stainless steel case and ceramic top
- Patent-pending low profile design and complete portability
- 59500P has a variable speed knob for fast temperature adjustment
- Ranges display HOT when unit is turned off, if the cooking surface is still hot
- Rubber feet to prevent slipping of appliance
- Unit comes with cord and plug and does not require hard wiring
- FCC listed

IMPORTANT

- This appliance is intended for use with induction-ready cookware.
- All models require adequate unrestricted intake and exhaust air ventilation for proper operation of the controls. The maximum intake temperature must not exceed 110°F (43°C). Temperatures are measured in ambient air while all appliances in the kitchen are in operation.
- Countertop models require a minimum clearance of 4 inches (10.2 cm) at the rear and 1 inch (2.5 cm) at the bottom.

WARRANTY: All models shown come with Vollrath's standard warranty against defects in materials and workmanship. For full warranty details, please refer to the Vollrath Equipment and Smallwares Catalog.

| Approvals | Date |
|-----------|------|
| | |



Outperform every day.™
www.vollrath.com

The Vollrath Company, L.L.C.
1236 North 18th Street
Sheboygan, WI 53081-3201 U.S.A.
Customer Service: 800.628.0830
Canada Customer Service: 800.695.8560
Main Fax: 800.752.5620 or
920.459.6573



Technical Services: 800.628.0832
Technical Services Fax:
920.459.5462

INDUCTION RANGE: MIRAGE® PRO COUNTERTOP

MODELS 59500P 1.8kW @ 120V (US only)
 59510P 1.4 kW @ 120V (US and Canada)

DIMENSIONS

Dimensions shown in inches (cm)

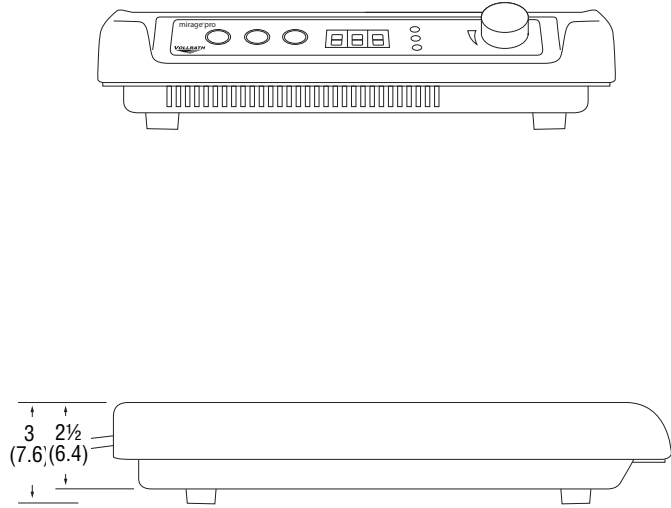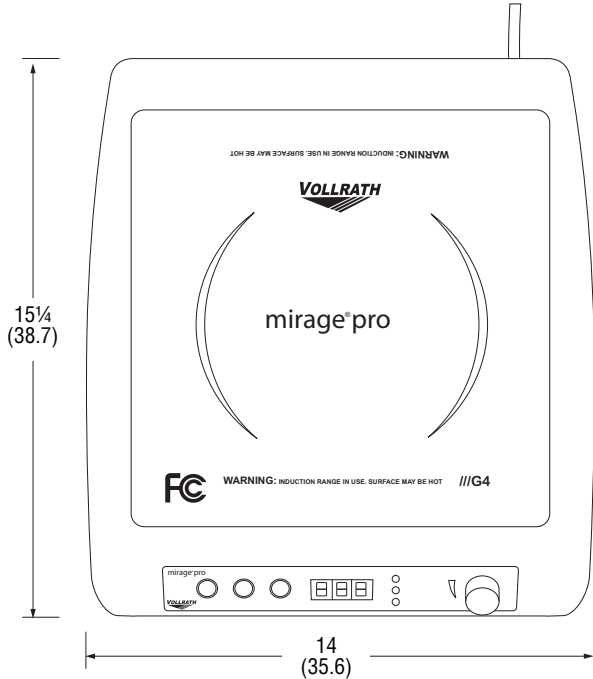


Unit shown with 1/2" (1.27 cm) feet.

SPECIFICATIONS – 1 PHASE, 60 HZ

| Model | Max Pan Size | kW Rating | Volts | Nominal Amps | Plug | Weight | Shipping Weight | Shipping Container |
|--------|--------------|-----------|---------|--------------|------------|---------------|-----------------|---|
| 59500P | 14 (35.6) | 1.8 | 120V AC | 15 | NEMA 5-15P | 12.8 (5.8) | 15.7 (17.1) | 17 3/4 x 17 x 7 1/4 (45.1 x 43.2 x 18.4) |
| 59510P | 14 (35.6) | 1.4 | 120V AC | 12 | NEMA 5-15P | 12.8 (5.8) | 15.7 (17.1) | 17 3/4 x 17 x 7 1/4 (45.1 x 43.2 x 18.4) |

Receptacle



Outperform every day.™

www.vollrath.com

The Vollrath Company, L.L.C.
 1236 North 18th Street
 Sheboygan, WI 53081-3201 U.S.A.
 Customer Service: 800.628.0830
 Canada Customer Service: 800.695.8560
 Main Fax: 800.752.5620 or

Technical Services: 800.628.0832
 Technical Services Fax:
 920.459.5462