# 6210

# SOFT SERVE FREEZER

Single flavor, Countertop, Gravity feed,

## **Product Offering**

Offer all popular soft serve variations from low or non-fat ice cream to custards, yogurt and sorbet.

## **Freezing Cylinder**

One, 1.3 quarts (1.2 Liter)

## **Mix Hopper**

One, 8.5 quarts (8 Liters) Hopper refrigeration maintains mix temperature Below 40°F (4.4°C) during Cool

#### **Mix Low Indicator**

When mix level is low, the Mix Low light turns "ON" to alert operator to add mix.

## Output

13 Quarts/Hour

## **Safety Protections**

- High pressure switch prevents compressor overheat
- Thermal overload protects from motor overheat















SPACEMAN USA

CORPORATE OFFICE: 4635 Nautilus Court South - Unit C | Boulder, CO 80301

PHONE: (888) 610-5520

WEB: WWW.SPACEMANUSA.COM



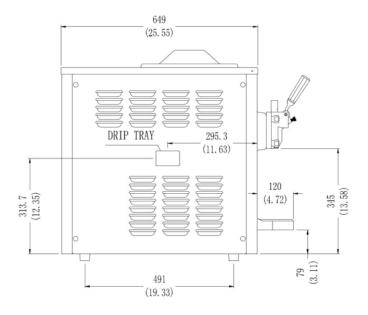

Weight	lb/Kg	
Net	193 / 87	_
Shipping	220 / 99	

Packaging Volume 10.13 CBF / 0.29 CBM

<b>Dimensions</b>	Net (in/mm)	Shippina	(ir	<u>/mm)</u>
Width	15 / 384	22	/	550
Depth	26 / 649	28	/	720
Height	27 / 691	34	/	870

Electical	Maximum	Min. Circuit	Poles (P)
	Fuse Size	Ampacity	Wires (W)
110-115/60/1	20	14	2P/3W

PLUG
L5-20

This unit may be manufactured in other electrical characteristics. Refer to the local Distributor for availability.

(For exact electrical information, always refer to the data label of the unit.)

#### Note

Continuing research results in steady improvements; therefore these specifications are subject to change without notice.

## **Specifications**

#### **Electrical**

One dedicated electrical connection is required. Unit shall be cord connected or permanently connected. Consult your local Spaceman distributor for available cord receptacle specifications as per local codes.

#### Motor

One, 0.8HP

#### **Refrigeration System**

Compressor: One 2,450 BTU/HR, R404A (BTUs may vary depending on compressor used.)

#### **Air Cooled**

Minimum clearance of 6" (152mm) on both sides of the machine is required to achieve optimum performance.

The rear of the unit may be placed against a wall. Max room temperature 95° F

#### **Options:**

- Air Exhaust Kit
- Local language Control Systems: English, French, Spanish, German, Dutch, Czech, Chinese

