

6690



MODEL 6690

FROZEN BEVERAGE FREEZER

Single flavor, Counter-top

Product Offering

Vary your menu by offering shakes & smoothies, fruit juices, coffees, cappuccino and tea slush beverages, all served at the desired thickness. Not recommended for products that contain alcohol.

Freezing Cylinder

One, 6.9 Liter (7.3 quarts)

Mix Hopper

One, 25 Liters (26.4 quarts)

Refrigerated to maintain mix below 4°C (40°F)

Approved for dairy and non-dairy products.

Indicator Lights

Add Mix light alerts the operator to add mix.

When Mix Out light turns ON, the unit automatically shuts down to prevent damage.

Automatic Consistency Control

Specially designed viscosity control automatically maintains superior product quality.


Adjustable control allows the operator to serve a wide variety of frozen beverages at the desired thickness.



Output

42 quarts per hour

Safety Protections

- High pressure switch prevents compressor overheat.
- Thermal overload protects from motor overheat.

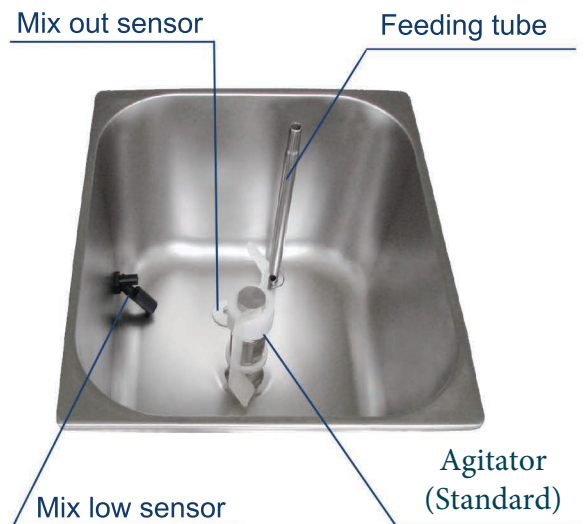

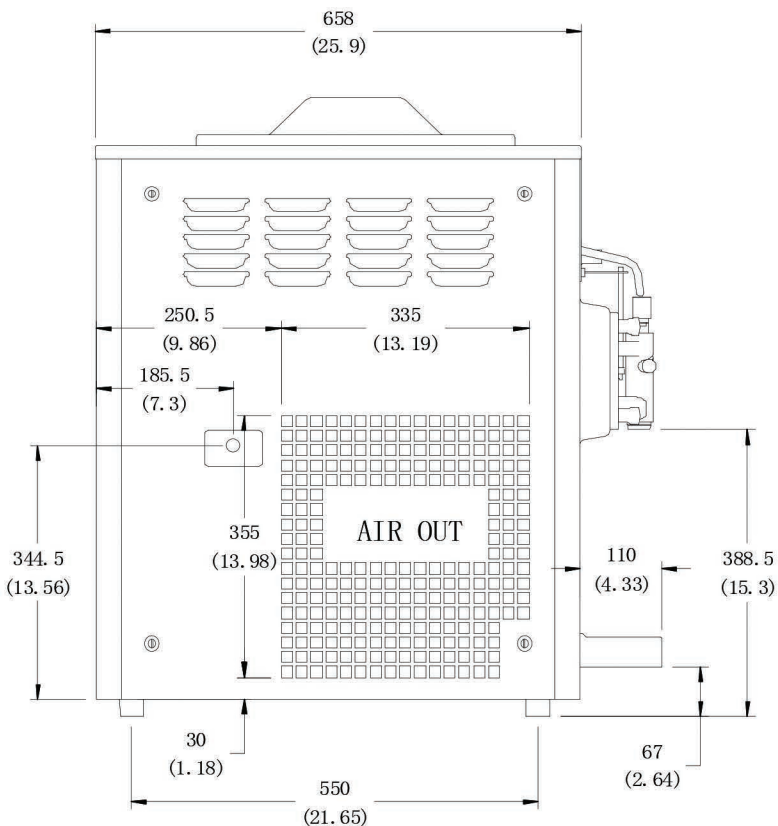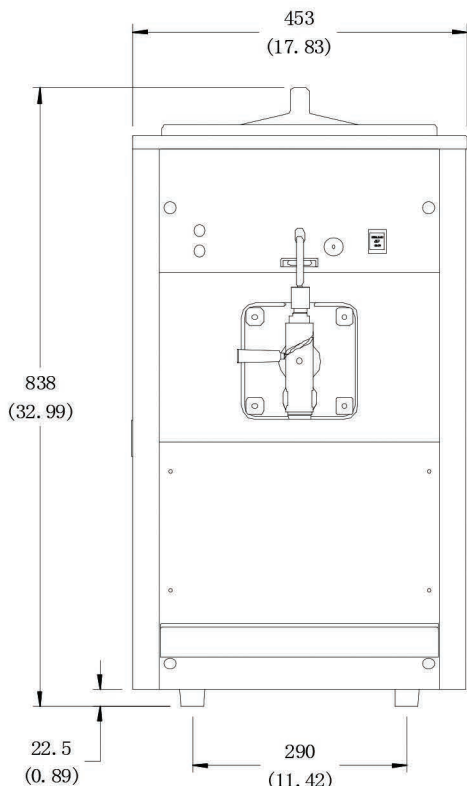

Weight	Kg / lb
Net	123 / 271
Shipping	137 / 302

Packaging Volume 0.46 CBM / 16.36 CBF

Dimensions	Net (mm/in)	Shipping (mm/in)
Width	453 / 17.8	510 / 20.1
Depth	658 / 25.9	845 / 33.3
Height	838 / 33.0	1075 / 42.3

Electrical	Maximum Fuse Size	Min. Circuit Ampacity	Poles (P) Wires(W)
208-230/60/1	20	15	2P/3W

PLUG: L6-20

This unit may be manufactured in other electrical characteristics. Refer to the local distributor for availability. (For exact electrical information, always refer to the data label of the unit.)

Note
Continuing research results in steady improvements, therefore, these specifications are subject to change without notice.

Specifications

Electrical
One dedicated electrical connection is required. Unit shall be cord connected or permanently connected. Consult your local Spaceman distributor for available cord & receptacle specifications as per local codes.

Motor
One, 4/5HP

Refrigeration System
Main Compressor: 14,800BTU/HR, R404A
Hopper Compressor: 480 BTU/HR, R134A

(BTUs may vary depending on compressor used.)

Air Cooled
Minimum clearance of 152mm (6") on both sides is required to achieve optimum performance. The rear of the unit may be placed against a wall
Max room temperature 95° F