

# 6695



## FROZEN BEVERAGE FREEZER

Two flavor, Countertop

### Product Offering

Vary your menu by offering shakes & smoothies, fruit juices, coffees, cappuccino and tea slush beverages, all served at the desired thickness. Not recommended for products that contain alcohol

### Freezing Cylinder

Two, 6.9 Liter (7.3 quarts)

### Mix Hopper

Two, 15 Liters (15.85 quarts)

Refrigerated to maintain mix below 4°C (40°F)

Approved for dairy and non-dairy products.

### Indicator Lights

Add Mix light alerts the operator to add mix. When Mix Out light turns ON, the unit automatically shuts down to prevent damage.

### Automatic Consistency Control

Specially designed viscosity control automatically maintains superior product quality. Adjustable control allows the operator to serve a wide variety of frozen beverages at the desired thickness.

### Output


65 Quarts/Hour

### Safety Protections



- High pressure switch prevents compressor overheat.
- Thermal overload protects from motor overheat.



Model 6695

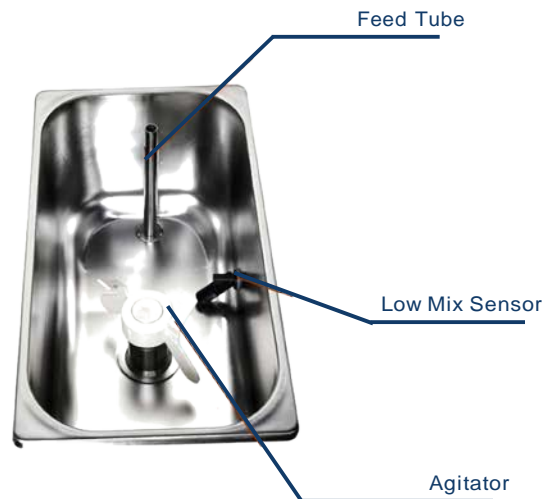

# Model 6695

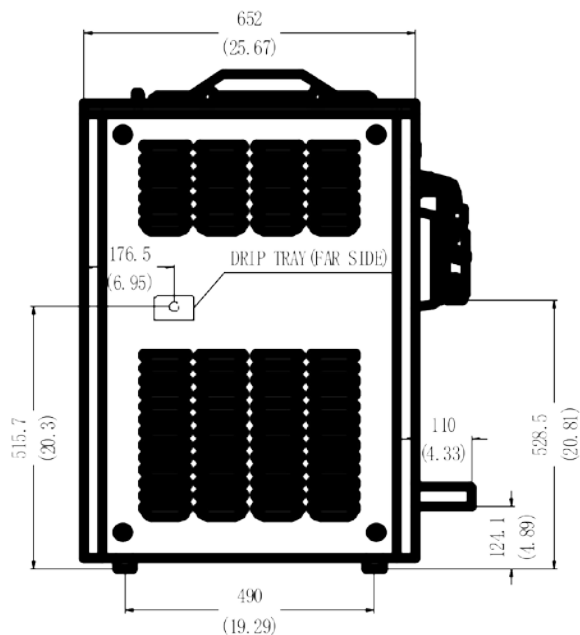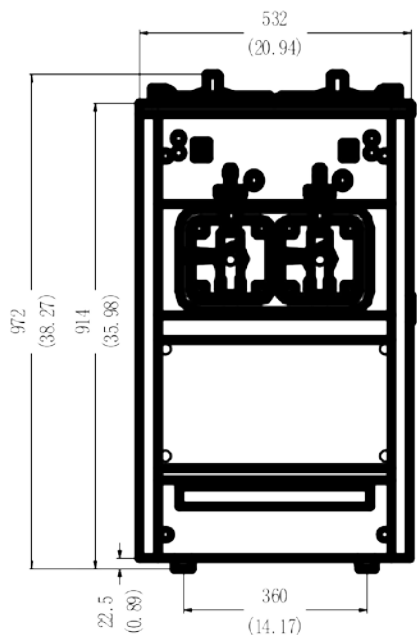

Weight	Kg / lb
Net	195 / 436
Shipping	215 / 478

**Packaging Volume** 0.68 CBM / 24.01 CBF

Dimensions	Net (mm/in)	Shipping (mm/in)
Width	532 / 20.9	630 / 24.8
Depth	652 / 25.7	940 / 37.0
Height	972 / 38.3	1145 / 45.1

Electrical	Maximum Fuse Size	Min. Circuit Ampacity	Poles (P) Wires(W)
220/60/1	20	16	2P/3W

### Plug

L6-20

*This unit may be manufactured in other electrical characteristics. Refer to the local Distributor for availability.*

*(For exact electrical information, always refer to the data label of the unit.)*

### Note

Continuing research results in steady improvements; therefore these specifications are subject to change without notice.

## Specifications

### Electrical

One dedicated electrical connection is required. Unit shall be cord connected or permanently connected. Consult your local Spaceman distributor for available cord receptacle specifications as per local codes.

### Motor

Two, 4/5 HP

### Refrigeration System

Compressor: One 7,800 BTU/HR, R404A (BTUs may vary depending on compressor used.)

### Separate Hopper Cooling Compressor

One, 480 BTU/HR

### Air Cooled

Minimum clearance of 6" (152mm) on both sides of the machine is required to achieve optimum performance. The rear of the unit may be placed against a wall. Max room temperature 95° F