



PRODUCT: _____

SKU NUMBER: _____

QUANTITY: _____



Shown with Optional Hose Reel

- 300-5025 2.2 gpm / 8.3 lpm @ 1100 psi / 76 bars, 115V
- 300-5035 2.2 gpm / 8.3 lpm @ 1000 psi / 69 bars, 208V
- 300-5027 2.2 gpm / 8.3 lpm @ 1100 psi / 76 bars, 230V
- 300-5024 2.9 gpm / 11 lpm @ 850 psi / 59 bars, 115V
- 300-5034 2.9 gpm / 11 lpm @ 800 psi / 55 bars, 208V
- 300-5026 2.9 gpm / 11 lpm @ 850 psi / 59 bars, 230V

FEATURES

- 2 HP Motor TEFC, 1725rpm, 1 Phase Draws 15A
- 3 Cylinder CAT® Super Flow Plunger Pump
- Quick Coupler Set (Connects Hose to Unit)
- Quick Coupler Set (Connects Gun to Hose)
- 50 ft / 15.3 m High Pressure Hose (Steel Braided)
- Adjustable Chemical Injector
- 1 - 1 gal / 3.8 L Chemical Baskets
- Pressure Gauge, 2000 psi / 138 bars, Liquid Filled
- Stainless Steel Cover and Frame
- Stainless Steel Wall Mount Brackets with Gun Hanger
- 6 ft / 2 m - Water Inlet Supply Hose
- 4 ft / 1.3 m Cord with GFC
- Maintenance Kit: Water Filter, Replacement Filter and Two Hydraulic Oils
- ETL-CSA Listed to UL 1776
- Shipping Weight: 239 lb / 104-.3 kg

Optional SMT-200RW Manual Rewind Hose Reel

SMT - 1100W Wall Mounted Pressure System

Spray Master Technologies®

TOLL FREE: 800.548.3373




115 E. LINDEN, ROGERS, ARKANSAS 72756 USA

PHONE: +1 479.636.5776 FAX: +1 479.636.3245

WWW.SPRAYMASTERTECH.COM



SMT - 1100W Wall Mounted Pressure System

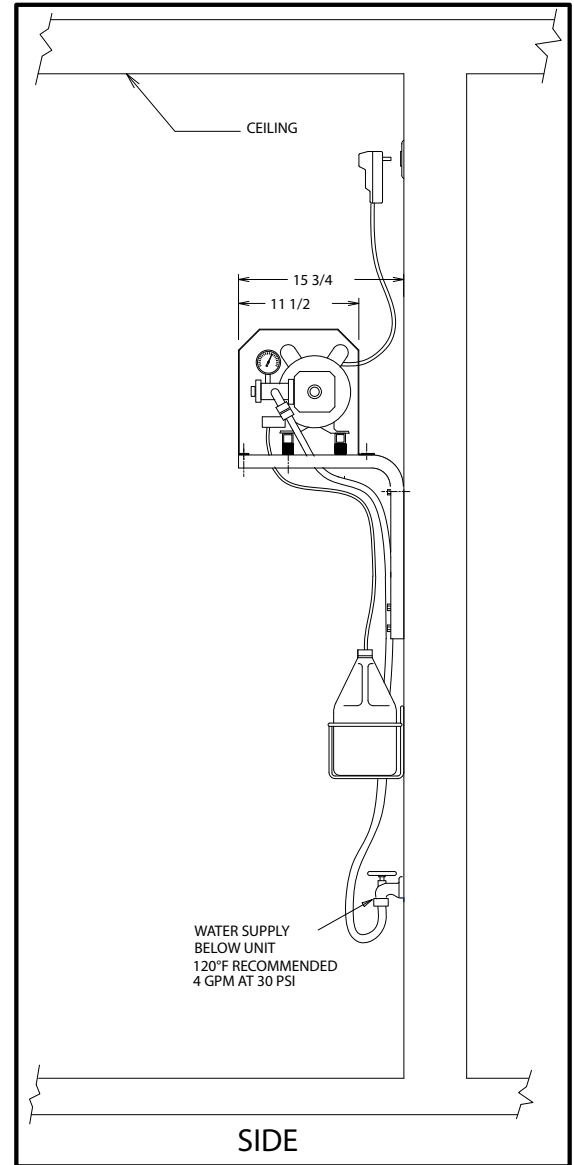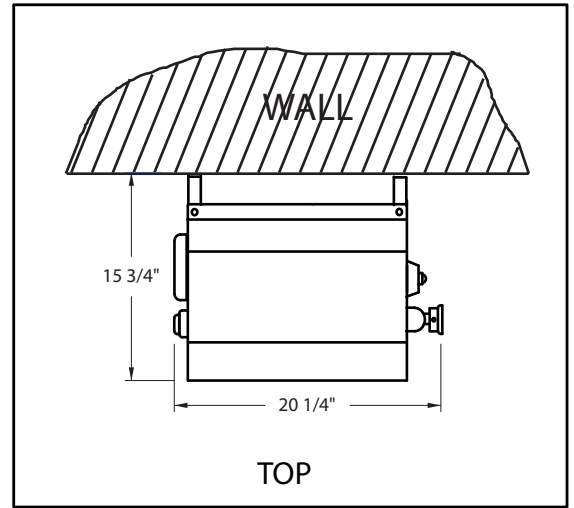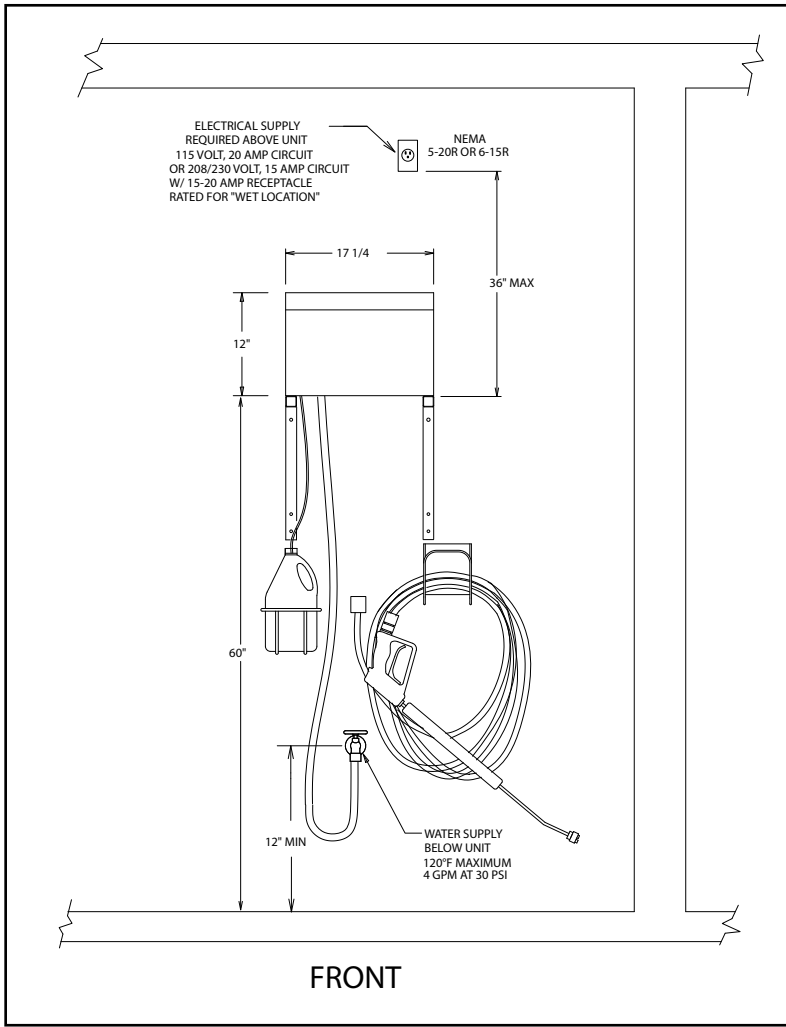

Equipment Specifications

Clearances

Left side	12"/30cm
Right side	12"/30cm
Overhead	14"/35cm
Floor	36"/91cm
Front	36"/91cm

Plumbing

3/4"/2cm Hose Bib with 5gpm/.14Lpm @
30psi/20.6bars. 120°F/49°C Max

Electrical

115V, 16A dedicated circuit or
208-230V, 15A GFCI.

Installation Specifications

Electrical:

One (1) 115V, 60hz, single phase, 20A, 'Dedicated Circuit' with standard receptacle. NOTE: For 208V or 230V units a 15A wall receptacle is required.

Water:

One (1) warm water outlet 120°F/49°C MAX with standard 3/4"/1.9cm hose bib with shut-off valve. A pressure gauge in the water line can be helpful although it is not mandatory. A minimum of 5 gal./ 19L per minute and a line pressure not less than 30psi/20.6bars, is required.

Location:

Heated utility room or closet with ventilation. Minimum 14in/.35m clearance above unit required to remove cover. The cover must be removed for servicing the unit. The unit can be serviced without removing it from the wall.

General Recommendations:

Floor drains are essential in new facilities to receive the greatest utilization and maximum efficiency of your SPRAY MASTER Pressure Washer. Floor materials and wall coverings which can be cleaned with pressurized water are desirable. Locate electrical outlets above washing areas.