



# HOLMAN 2 & 4 SLICE POP-UP TOASTERS

## Models T2, T4, BT4, CT4

### Features/Benefits:

- ★ Holman's Pop-Up Toasters will toast your bagels, breads, buns or a variety of other bread products to perfection.
- ★ Available in 2 & 4 slice designs to accommodate any volume foodservice operation.
- ★ Solid state timer control(s) for consistent toasting cycles.
- ★ Insulated ceramic heating elements provide uniform heat and even toasting.
- ★ Extra wide 1-1/8" slots for toasting bagels or Texas toast.
- ★ Operating lever and color selection knob to meet all of your customers tastes.
- ★ Removable crumb tray for easy cleaning.
- ★ Production ranges from 150 slices per hour for two slice toasters and 250 slices per hour for four slice toasters.
- ★ Each toasting chamber is equipped with oven guide wires and lowering rack.



Model T2

### Applications:

Commercial electronic pop-up toasters are designed to uniformly toast bread, frozen waffles, bagels, buns and many other foods consistently.

### Quality Construction:

Holman's 2 and 4 slice toasters feature stainless steel body, insulated ceramic etched foil heaters and pullout crumb tray. Dual thermostats and adjustable color control for each bank of two slot openings. Toasters come complete with 3' lead in cord and molded plug.

### Warranty:

Holman's Pop-Up Toasters are covered by a one year parts and labor warranty.



Model CT4






Star Manufacturing International, Inc.

Holman® 2 & 4 Slice Pop-Up Toasters

## HOLMAN® 2 & 4 SLICE POP-UP TOASTERS

### Models T2, T4, BT4, CT4

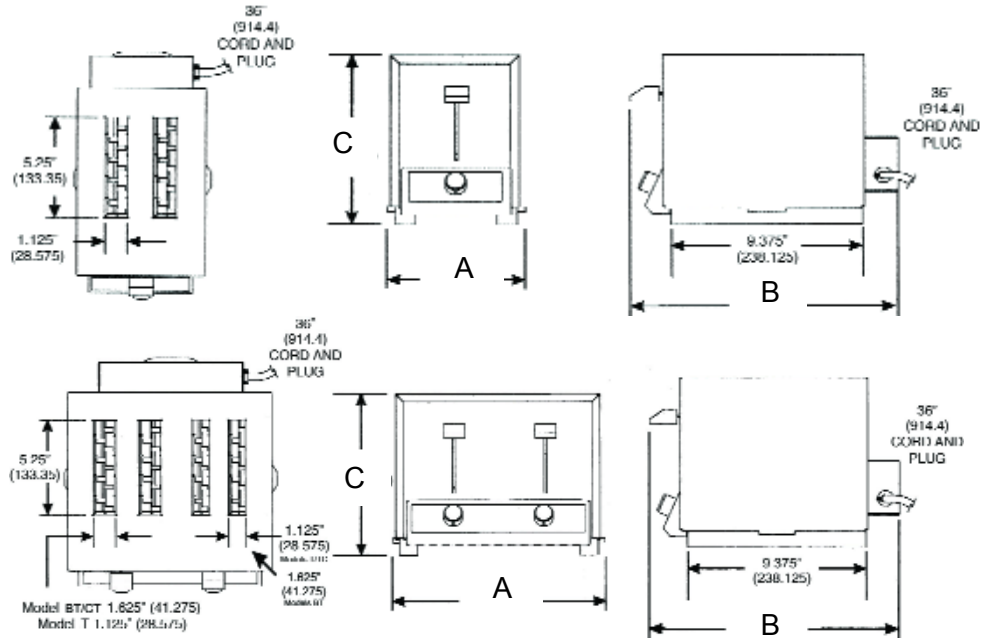

#### Model Specifications

| Model No. | Description             | Dimensions          |                     |                      | NEMA   | Voltage | Wattage     | Amps     | Approximate Weight |                     |
|-----------|-------------------------|---------------------|---------------------|----------------------|--------|---------|-------------|----------|--------------------|---------------------|
|           |                         | A Width Inches (cm) | B Depth Inches (cm) | C Height Inches (cm) |        |         |             |          | Shipping lbs. (kg) | Installed lbs. (kg) |
| T2        | Two Slot Toaster        | 6-5/8               | 13-3/8              | 9-3/16               | 5-15P  | 120     | 1,100       | 9.0      | 12.3               | 9.0                 |
|           |                         | (16.8)              | (34)                | (23.3)               | 6-15P  | 208/240 | 1,000/1,300 | 4.8/5.4  | (5.6)              | (4.1)               |
| T4        | Four Slot Toaster       | 11-7/16             | 13-3/8              | 9-3/16               | 5-20P* | 120     | 2,200       | 18.3     | 21                 | 16.5                |
|           |                         | (29.1)              | (34)                | (23.3)               | 6-15P  | 208/240 | 2,000/2,600 | 9.6/10.8 | (9.5)              | (7.5)               |
|           |                         |                     |                     |                      | 6-20P  | 208V    | 2,600       | 12.5     |                    |                     |
| BT4       | Four Slot Toaster       | 11-7/16             | 13-3/8              | 9-3/16               | 5-20P  | 120     | 1,800       | 15.0     | 21                 | 16.5                |
|           |                         | (29.1)              | (34)                | (23.3)               | 6-15P  | 208/240 | 1,400/1,800 | 6.7/7.5  | (9.5)              | (7.5)               |
| CT4       | Four Slot Combo Toaster | 11-7/16             | 13-3/8              | 9-3/16               | 5-20P* | 120     | 2,000       | 16.6     | 21                 | 16.5                |
|           |                         | (29.1)              | (34)                | (23.3)               | 6-15P  | 208/240 | 1,700/2,200 | 9.2      | (9.5)              | (7.5)               |

\*Not approved for Canada

#### Typical Specifications

Holman's Pop-Up Toasters have a polished stainless steel body with 2 or 4 slot openings from 1-1/8" wide and 5-1/4" long. A large removable crumb tray is standard. Toasters have an adjustable color control knob coupled with a voltage and temperature compensating electronic control for each bank of 2 slot openings. Insulated ceramic etched foil heaters installed on both sides of chamber (one side for bagel toasters). Toasters come complete with a 3 foot lead in cord with molded plug (NEMA #5-15P on 2 slot 120V, 5-20P on 4 slot 120V, 6-15P on T4, BT4 and CT4 208/240 and 6-20P on T4 208V). Toasters have been tested by ETL in accordance to UL and CSA standards. ETL listed to NSF standard 4. Printed in the U.S.A.

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Star Manufacturing exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.

Star Manufacturing International Inc. - 10 Sunnen Drive - P.O. Box 430129 - St. Louis, MO 63143-3800

Phone: (800) 264-7827 - FAX: (800) 264-6666 - www.star-mfg.com