



SPLIT-BELT IMPINGEMENT/RADIANT CONVEYOR TOASTER

MODELS IRCS2-SBK

FEATURES/BENEFITS

- Multi use toaster/ broiler- belts can be used with conveyor for traditional bread products such as croissants and bagels, product paddles can be used to heat/toast non-traditional bread products or broiler.
- High intensity infrared elements and impingement airflow reduces toast time up to 50% by quickly and evenly heating food products.
- Two, independent, 5" wide conveyors.
- Dual controllers; each controls top toasting power, lower toasting power and belt speed for each side.
- 1400 watts top toasting power each side provided by a serpentine, metal-sheathed radiant element.
- 1000 watts bottom toasting power each side provided by a serpentine, metal sheathed radiant element.
- Choice of toast or timer menu's or countdown timer.
- Stainless divider between conveyors and elements.
- Full width flip and return area behind and under conveyors.
- Single NEMA L6-30 twist lock plug feeds two individual fuse blocks that protect each side for full separation.
- Each controller has four re-programmable menu buttons that can be configured to control power to the top and bottom elements individually (0 -10, increments of 1). The conveyor speed can also be pro-grammed for relative speed settings of 0-99.
- Two menu buttons control a timing feature for cheese melting.
- Safe load up area with full width composite front burn guard and cool to the touch exterior.
- "Smart" crumb tray keeps the bread crumbs from falling under the toaster.
- Reversible motors automatically removes products from toasting chamber during cheese melting function.



Model IRCS2-SBK

IRC SPLIT-BELT CONVEYOR TOASTER

Application:

This state of the art toaster is designed for a variety of bread products such as bagels, English muffins, toast, buns and more. Electronic controls are perfect for foodservice operations and restaurants. The innovative energy saving feature can significantly reduce cost and extend component life with a simple touch of a button.

Quality Construction:

Star's Two-Sided Grills are constructed of 18 gauge stainless steel. Units available with aluminum, iron grooved or smooth platens. Star's heavy-duty hinge mechanism is constructed of hardened aluminum for strength and durability. Metal tubular elements are standard. The lead-in cord is resistant to water and oil to protect wiring. Furnished with a 6' cord and standard NEMA plug. Other plugs available upon request.

Warranty:

Star's split-belt toasters are covered by a **one year** parts and labor warranty.




NEMA L6-30R



SPLIT-BELT IMPINGEMENT/RADIANT CONVEYOR TOASTER

MODELS IRCS2-SBK

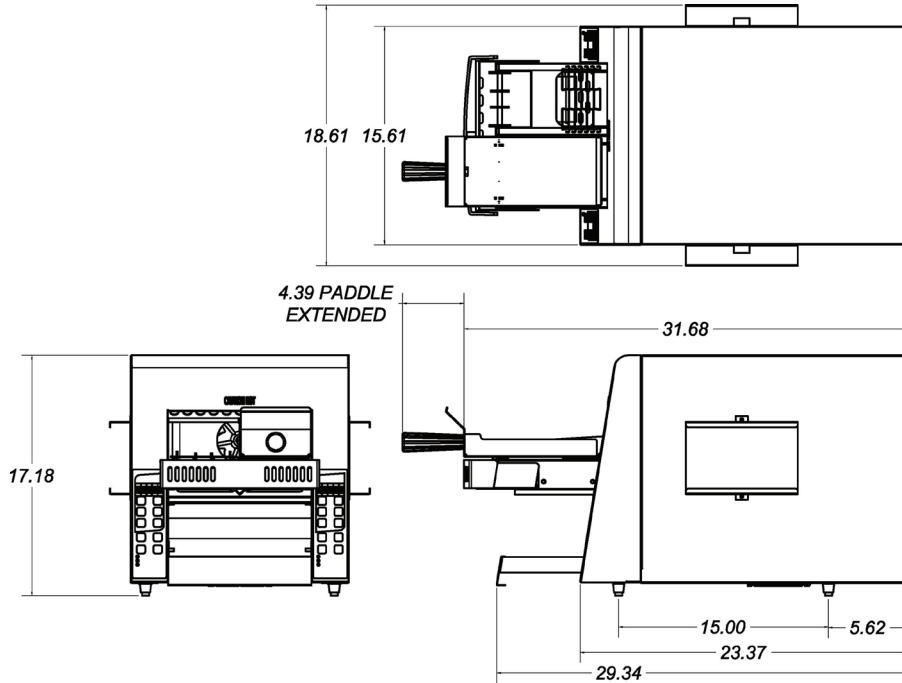

Specifications

Model No.	Dimensions			Ship Weight
	Width (cm)	Depth (cm)	Height (cm)	
IRCS2-SBK	18.6 (47.2)	23.4 (59)	17.2 (44)	N/A

Electrical Data

Model No.	Volts	Amps	Watts Per Right Side		Watts Per Left Side		Total Watts	NEMA
			Above	Below	Above	Below		
IRCS2-SBK	208V	23	1400	1000	1400	1000	4800	L6-30P
	240V	20						



NEMA L6-30R

Typical Specifications

Split belt conveyor toaster is constructed of corrosion resistant stainless steel. Supplied with two heavy-duty motors, drive chain and fast heat up metal sleeve infrared heaters. A conveyor belt tension system is supplied for a smooth, quiet operation. Units are supplied with variable speed control, top and bottom heat control, power saver and high limit switch. Extended conveyor belt, crumb tray, heated holding area and full width burn guard are standard. Unit has a one-piece cover for easy access with 1" adjustable legs and a 6' cord with NEMA L6-30 plug. Printed in the U.S.A.

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Star Manufacturing exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.