



RADIANT CONVEYOR TOASTER

Model RCS2-600N

QCS Features/Benefits:

- ★ Holman's forced convection system keeps the toaster cool to the touch and extends the life of critical components. The forced convection increases productivity by circulating pre-heated air into toasting chamber.
- * Narrow body with metal sheath elements.
- ★ High volume compact toaster requires only 9-1/2" of counter space and the forced convection system allows the unit to be placed against a wall. Other toasters have louvers requiring additional counter space.
- ★ Unit produces up to 400 bread slices per hour.
- ★ Easy to use control panel takes the guesswork out of speed control settings.
- ★ Toasts bread in seconds!
- ★ Variable speed control for perfect color and texture of bread.
- ★ Extended conveyor belt for easy loading and large warming area for higher production.
- ★ Safe load up area with full width front burn guard and cool to the touch exterior.
- ★ "Smart" crumb tray keeps the breadcrumbs from falling under the toaster
- ★ Heated holding area to keep toast at the perfect temperature.
- ★ Requires power from a standard 120V oultlet, adding to flexibility of use in the kitchen.
- ★ 24 hours 7 days a week technical support by Star technicians.

Applications:

The RCS2-600N toaster toasts bread perfectly while saving time and money.

Quality Construction:

No matter how you slice it, Holman delivers high quality, reliable toasters. Stainless steel construction for long lasting durability. Heavy-duty motor, drive chain and conveyor speed control for superior reliability. Conveyor belt tension system for smooth and quiet operation. High performance metal sheath elements provide superior toasting performance and reliability. Units are easy to disassemble with one-piece cover for cleaning and service. Toasters are furnished with 1" adjustable legs and 5ft minimum cord length.

Warranty:

Holman's conveyor toasters are covered by a one-year parts and labor warranty.



Model RCS2-600N










Star Manufacturing

RADIANT CONVEYOR TOASTER

Model RCS2-600N





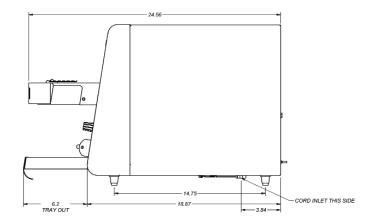

| Specifications | | | | |
|----------------|--------|--------------|--------|----------|
| | | Dimensions | | Shipping |
| Model No. | Width | Depth W/Tray | Height | Weight |
| | Inches | Inches | Inches | lbs |
| | (cm) | (cm) | (cm) | (kg) |
| RCS2-600N | 9.47" | 24.56" | 15.64" | N/A |
| | (24.1) | (62.4) | (39.7) | (N/A) |

Typical Specifications

High performance conveyor toaster is constructed of corrosion resistant stainless steel. Supplied with heavy-duty motor, drive chain and metal sheath elements. A conveyor belt tension system is supplied for a smooth, quiet operation. Extended conveyor belt, crumb tray, heated holding area and full width burn guard is standard. Unit has a one-piece cover for easy access with 1" adjustable legs and a 5ft minimum cord length.

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Star Manufacturing exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.