


Counter-Top Shake Freezer or Frozen Beverage Dispenser

F122



- Compact, space-saver unit, offers the convenience to serve frozen beverages, shakes, smoothies or frozen cocktails.
- IntelliTec2™ control communicates with the operator through a multiline graphics LCD display using full text instructions.
- Two large freezing cylinders for high volume dispensing and quick recovery.
- High capacity refrigeration system with a 12,000 Btu/hr compressor produces volumes of shakes or frozen beverages.
- Stainless steel auger, heavy duty speed reducer and 1/2 hp drive motor set the standard for long life dependability.
- Each door is made of clear polycarbonate that highlights pre-flavored products.
- ADA compliant for self service locations when paired with optional floorstand.
- Can easily be adapted to autofill accessories.
- Air and Water cooled units available.



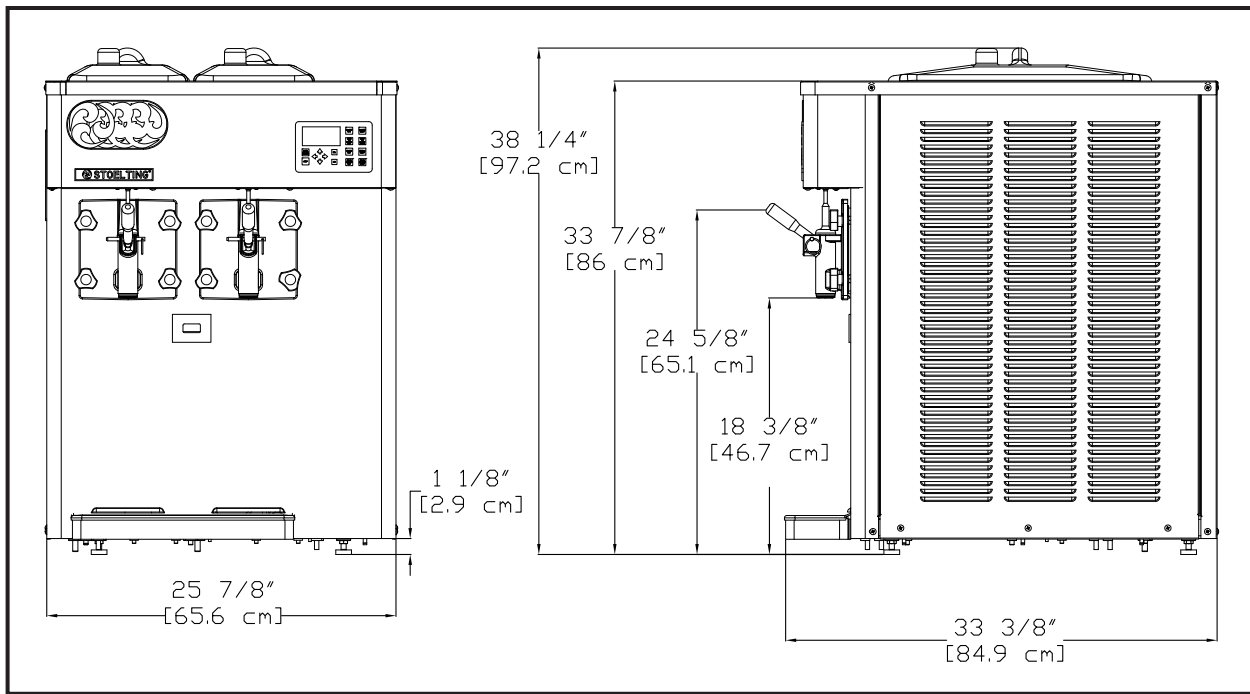

Model F122		
Dimensions	Machine	with crate
width	25-7/8" (65,7 cm)	31-3/4" (80,6 cm)
height	38-1/4" (97,2 cm)	47-3/8" (120,3 cm)
depth	33-3/8" (84,8 cm)	41-1/4" (104,8 cm)
Weight	390 lbs (176,9 kg)	485 lbs (219,9 kg)
*Electrical	1 Phase, 208-240 VAC, 60Hz	
running amps	14.5A	
connection type	NEMA6-20P power cord provided	
Compressor	12,000 Btu/hr	
Drive Motor	Two - 1/2 hp	
Air Flow	Air cooled units require 6" (15,24 cm) air space on both sides	
Plumbing Fittings	Water cooled units require 3/8" N.P.T. water and drain fittings.	
Hopper Volume	Two - 3 gallon (11,36 liters)	
Freezing Cylinder Volume	Two - 2.125 gallon (8,04 liters)	

Continuous research leads to ongoing product improvements; therefore, these specifications are subject to change without notice and should not be used as installation specifications.

* Machine requires a dedicated electrical circuit.

Distributed by:



502 Highway 67 • Kiel, WI 53042-1600
 920-894-2293 • 800-558-5807
 Fax: 920-894-7029
 E-mail: foodservice@stoelting.com
www.stoeltingfoodservice.com

ISO 9001:2008 Registered

Certified, Listed and/or Recognized by:



STMF-105 04/12