


# TWIN TWIST, FLOOR MODEL, GRAVITY SOFT SERVE/YOGURT FREEZER

0231



- Precision controlled refrigeration system designed for quality product consistency from the first cone to the last.
- Hard-working unit handles peak demands, while providing years of dependable service.
- IntelliTec 2™ control communicates with the operator through a multiline graphics LCD display using full text instructions.
- Energy Conservation Mode (ECM) protects product from over-agitation during slow or non-draw periods.
- Separate hopper refrigeration system.
- Proprietary auger design gently folds mix and prevents product breakdown, producing a smoother, creamier product.
- Clear door shows visible moving product for merchandising appeal.
- Self-closing spigot eliminates waste and assures precise portion control.
- Adjustable dispense rate for optimal product output.
- Long-wearing parts offer low preventative maintenance costs.
- Built for ease of operation and cleaning.
- Twist feature allows you to serve two flavors individually or combine flavors for a unique twist.



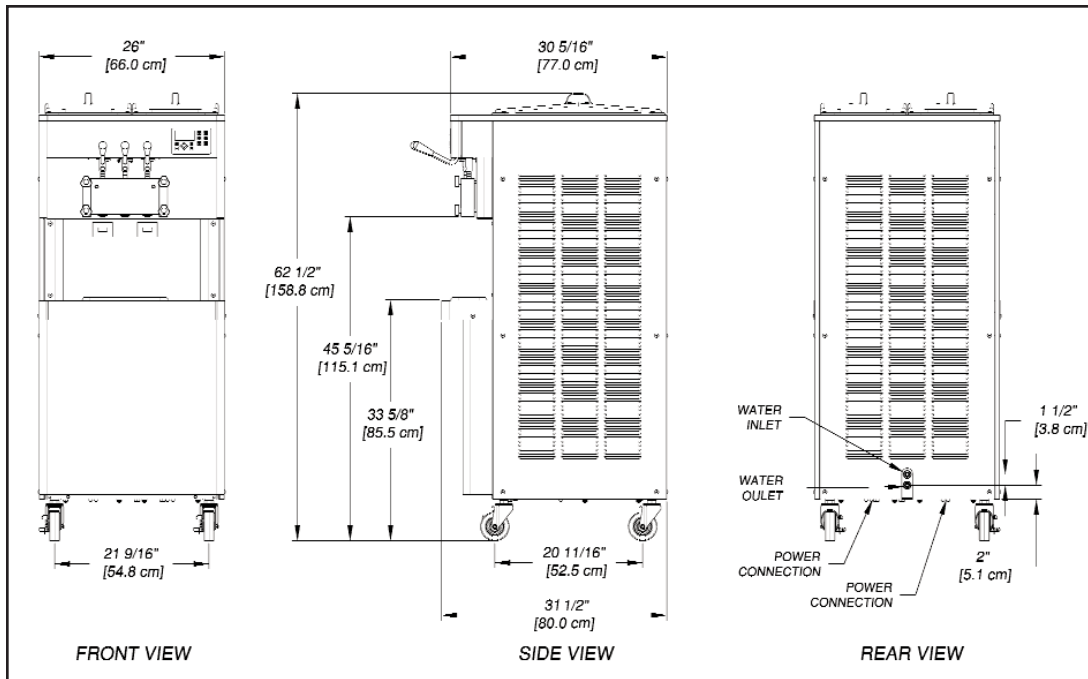

	<b>O231 Water Cooled</b>		<b>O231 Air Cooled</b>	
<b>Dimensions</b>	<b>Machine</b>	<b>with crate</b>	<b>Machine</b>	<b>with crate</b>
width	26" (66,0 cm)	40-1/4" (102,2 cm)	26" (66,0 cm)	40-1/4" (102,2 cm)
height	62-1/2" (158,8 cm)	64-1/2" (163,8 cm)	62-1/2" (158,8 cm)	64-1/2" (163,8 cm)
depth	31-1/2" (80,0 cm)	33-1/4" (84,5 cm)	31-1/2" (80,0 cm)	33-1/4" (84,5 cm)
<b>Weight</b>	640 lbs (290,2 kg)	730 lbs (331,1 kg)	640 lbs (290,2 kg)	730 lbs (331,1 kg)
<b>Electrical</b> circuit ampacity (per barrel) overcurrent protection device (per barrel)	<b>1 PH</b>	<b>3 PH</b>	<b>1 PH</b>	<b>3 PH</b>
	26A minimum 40A maximum	19A minimum 30A maximum	27A minimum 40A maximum	20A minimum 30A maximum
<b>Compressor</b>	Freezing Cylinders - Two 14,000 Btu/hr (R-404A) Storage - 1,300 Btu/hr Compressor (R-134a)			
<b>Drive Motor</b>	Two - 2 hp			
<b>Cooling</b>	Water cooled units require 3/8" N.P.T. water and drain fittings with 2 inlets and 2 outlets or 1/2" N.P.T. water and drain fittings with 1 inlet and 1 outlet		Air cooled units require 6" (15,2 cm) air space at back.	
<b>Hopper Volume</b>	Two - 6.5 gallon (24,7 liters)			
<b>Freezing Cylinder Volume</b>	Two - 1 gallon (4 quart), 3,79 liters			

Continuous research leads to ongoing product improvements; therefore, these specifications are subject to change without notice and should not be used as installation specifications.

Distributed by:



FOODSERVICE EQUIPMENT

502 Highway 67 • Kiel, WI 53042-1600

920-894-2293 • 800-558-5807

Fax: 920-894-7029

E-mail: [foodservice@stoelting.com](mailto:foodservice@stoelting.com)

[www.stoeltingfoodservice.com](http://www.stoeltingfoodservice.com)

ISO 9001:2008 Registered

Certified, Listed and/or Recognized

