HIGH CAPACITY COMBINATION SOFT SERVE/SHAKE MACHINE W/REFRIGERATED CABINET



Model U444 (without mixer).



- Allows the operator to dispense smooth soft serve from the left side and thick creamy shakes from the right side with the convenience and cost of one unit.
- Provides greater reliability and quieter operation with the combination of Stoelting's high efficiency evaporator system and Scroll™ compressor.
- Refrigerated mix storage cabinet has a slide-out shelf that holds two 8-gallon mix containers.
- Mix pump injects the precise amount of air into the mix, providing consistent overrun to ensure maximum profitability.
- · Clean-in-place simplicity of pump reduces labor.
- Proprietary auger design gently folds mix and prevents product breakdown, producing a smoother, creamier product.
- Long-wearing parts offer low preventative maintenance costs.
- Optional bag connection system eliminates potential mix contamination sources.


SOFT SERVE

- Standby refrigeration mode provides fresh creamy product at opening time.
- Maximum freezing mode allows for high volume dispensing.

SHAKE

- The IntelliTec control features a display, which communicates with the operator for worry-free operation.
- Dispensing and mixing product is accomplished with a single front-mounted handle, for fastest speed of service.




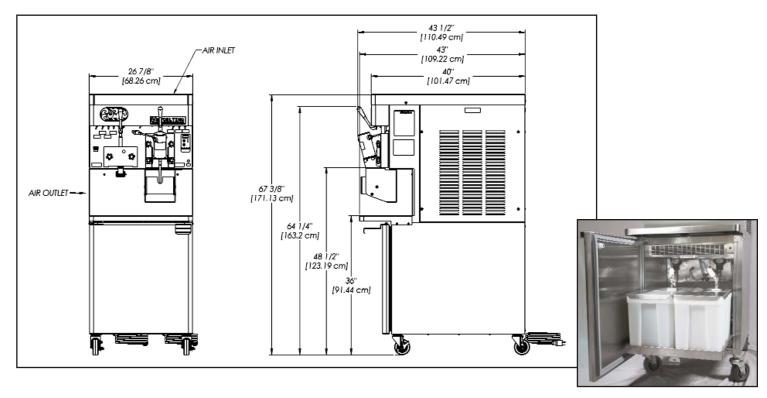

Refrigerated Storage Cabinet showing slide-out mix shelf and bag connection system.

	hine	with	4 .	
26-7/8" (Machine		with crate	
26-7/8" (68,3 cm)		34" (86,4 cm)		
67-3/8" (171,1 cm)		78" (198,1 cm)		
40" (101,6 cm)		48" (121,9 cm)		
760 lbs (344,7 kg)		908 lbs (411,8 kg)		
1 Phase, 208-240 VAC, 60Hz		3 Phase, 208-240 VAC, 60Hz		
Left	Right	Left	Right	
approximately 21A	approximately 15A	approximately 17A	approximately 15A	
NEMA L6-30P	NEMA L6-30P	NEMA L15-30P	NEMA L15-30P	
Soft Serve - 19,000 Btu/hr Scroll™ Compressor (R-404A)				
	Cabinet - 1,300 Btu/hr Compressor (R-134a)			
Soft Serve - 2 hp, Shake - 3/4 hp				
Air cooled units require 3" (7,6 cm) air space on both sides, 6" back.				
Two - 8 gallons (30,29 liters)				
Soft Serve - 1.33 gallon (5.32 quart), 5,4 liters				
Warranty Five-year warranty on compressor, evaporator assembly, drive motor, s			•	
	67-3/8" (1 40" (10: 760 lbs (3: 1 Phase, 208-2 Left approximately 21A NEMA L6-30P Soft Ser Shake C: Air cooled unit	67-3/8" (171,1 cm) 40" (101,6 cm) 760 lbs (344,7 kg) 1 Phase, 208-240 VAC, 60Hz Left Right approximately 21A approximately 15A NEMA L6-30P NEMA L6-30P Soft Serve - 19,000 Btu/hr S Shake - 15,000 Btu/hr S Cabinet - 1,300 Btu/hr Soft Serve - 2 hp Air cooled units require 3" (7,6 cm Two - 8 gallon Soft Serve - 1.33 gallon Shake - 2.1 gallon (8	67-3/8" (171,1 cm) 78" (19 40" (101,6 cm) 48" (12 760 lbs (344,7 kg) 908 lbs (3 1 Phase, 208-240 VAC, 60Hz Left Right approximately 21A ANEMA L6-30P NEMA L6-30P NEMA L15-30P Soft Serve - 19,000 Btu/hr Scroll™ Compressor (Shake - 15,000 Btu/hr Scroll™ Compressor (R-Cabinet - 1,300 Btu/hr Compressor (R-134a) Soft Serve - 2 hp, Shake - 3/4 hp Air cooled units require 3" (7,6 cm) air space on both si Two - 8 gallons (30,29 liters) Soft Serve - 1.33 gallon (5.32 quart), 5,4 liters) Shake - 2.1 gallon (8.4 quart), 7,95 liters	

Continuous research leads to ongoing product improvements; therefore, these specifications are subject to change without notice.





FOODSERVICE EQUIPMENT 502 Highway 67 • Kiel, WI 53042-1600 920-894-2293 • 800-558-5807 Fax: 920-894-7029

E-mail: foodservice@stoelting.com www.stoeltingfoodservice.com ISO 9001:2000 Registered

Certified, Listed and/or Recognized by:



