

High Capacity Combination Soft Serve/Yogurt, Shake Freezer with Refrigerated cabinet

U444
SU444




Model U444 (without mixer)



Refrigerated Cab showing
slide-out mix shelf & bag
connection system

- Allows the operator to dispense smooth soft serve from the left side and thick creamy shakes from the right side with the convenience and cost of one unit.
- Provides greater reliability and quieter operation with the combination of Stoelting's high efficiency evaporator system and Scroll™ compressor.
- Refrigerated mix storage cabinet has a slide-out shelf that holds two 8-gallon mix containers.
- Mix pump injects the precise amount of air into the mix, providing consistent overrun to ensure maximum profitability.
- Clean-in-place simplicity of pump reduces labor.
- Proprietary auger design gently folds mix and prevents product breakdown, producing a smoother, creamier product.
- Long-wearing parts offer low preventative maintenance costs.
- Optional bag connection system eliminates potential mix contamination sources.
- The IntelliTec2™ control features a multi-line graphics LCD display, which communicates with the operator for worry-free operation.
- Standby refrigeration mode provides fresh creamy product at opening time.
- Maximum freezing mode allows for high volume dispensing.
- Dispensing and mixing of shake product is accomplished with a single front-mounted handle, for fastest speed of service.



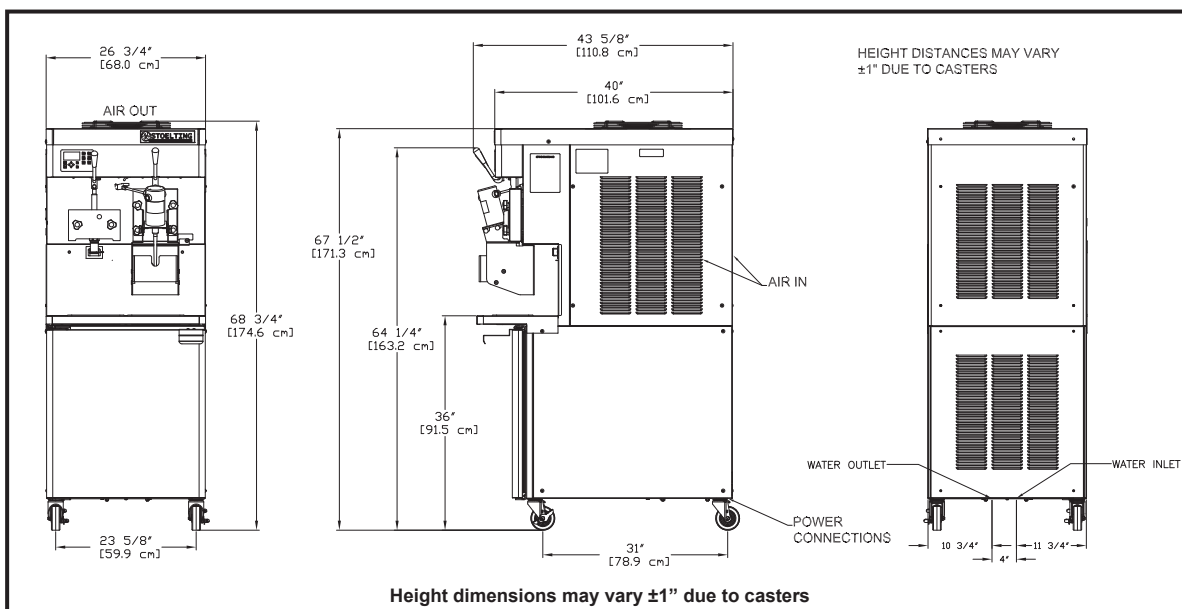

	SU444 I2 Water Cooled				SU444 I2 Air Cooled			
Dimensions	Machine		with crate		Machine		with crate	
	width		26-3/4" (67,9 cm)34" (86,4 cm)		26-3/4" (67,9 cm)34" (86,4 cm)		26-3/4" (67,9 cm)34" (86,4 cm)	
	height		67-1/2" (171,5 cm)78" (198,1 cm)		67-1/2" (171,5 cm)78" (198,1 cm)		67-1/2" (171,5 cm)78" (198,1 cm)	
	depth		40" (101,6 cm)48" (121,9 cm)		40" (101,6 cm)48" (121,9 cm)		40" (101,6 cm)48" (121,9 cm)	
Weight	760 lbs (344,7 kg)		908 lbs (411,8 kg)		760 lbs (344,7 kg)		908 lbs (411,8 kg)	
Electrical*	1 PH		3 PH		1 PH		3 PH	
	left	right	left	right	left	right	left	right
	minimum circuit ampacity		35A27A		23A19A		35A27A	
	maximum overcurrent protection device		50A40A		31A26A		51A41A	
Compressor	Soft Serve - 19,000 Btu/hr Scroll™ Compressor (R-404A)							
	Shake - 15,000 Btu/hr Scroll™ Compressor (R-404A)							
	Cabinet - 1,300 Btu/hr Compressor (R-134a)							
Drive Motor	Soft Serve - 2 hp, Shake - 3/4 hp							
Cooling	Water cooled units require 1/2" N.P.T. water and drain fittings. Maximum water pressure of 130 psi. Minimum water flow rate of 3 GPM. Ideal EWT of 50°-70°F. The machine requires 6" (15,2 cm) air space on all sides for the cabinet refrigeration system.				Air cooled units require 6" (15,2 cm) air space on both sides and back.			
Hopper Volume	Two - 8 gallon (30,28 liters)							
Freezing Cylinder Volume	Soft Serve - 1.33 gallon (5,4 liters)							
	Shake - 2.1 gallon (7,95 liters)							

Continuous research leads to ongoing product improvements; therefore, these specifications are subject to change without notice and should not be used as installation specifications.

* Machine requires a dedicated electrical circuit.

Distributed by:

STOELTING
A VOLLRATH® COMPANY
stoeltingfoodservice.com

Stoelting Foodservice Equipment
502 Highway 67 • Kiel, WI 53042-1600
920-894-2293 • 800-558-5807
Customer/Technical Service: 888-429-5920
E-mail: foodservice@stoelting.com

Certified, Listed
and/or Recognized by:



ISO 9001:2008 Registered
STMF-113 4/15