


# TWIN TWIST, FLOOR MODEL PRESSURIZED SOFT SERVE FREEZER

U431



- Adjustable dispensing rate meets the requirements of high volume operations
- Refrigerated mix storage cabinet holds (2) 8-gallon mix containers for use with and without bag connection system
- Air/mix pumps inject the exact amount of air into your mix, maintaining overrun to assure maximum profitability
- Electronic control assures peak efficiency and uniform product consistency
- Forced refrigeration switch to meet peak serving period demands
- Bottom sealing spigots eliminate waste and offer precise dispensing control
- Mix-low system to alert you of low mix conditions
- Self-sharpening, nonmetallic auger flights for reliable service
- Environmentally-friendly refrigerant



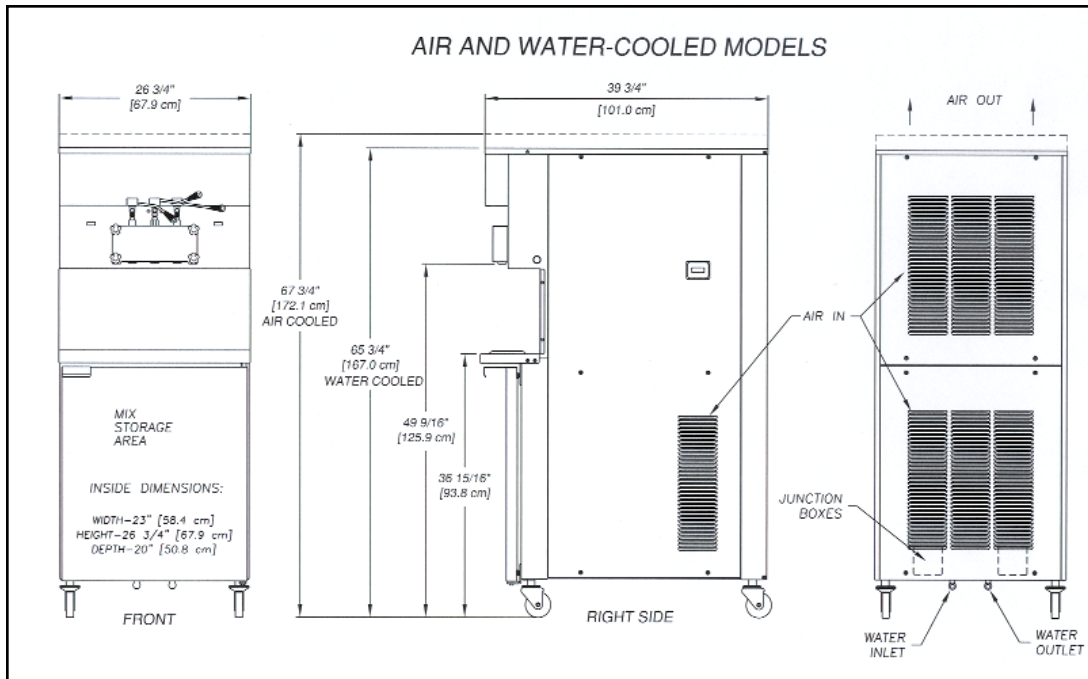

	U431 Water Cooled		U431 Air Cooled				U431 Remote Air Cooled					
Dimensions	Freezer		with crate		Freezer		with crate		Freezer		with crate	
width	26-3/4" (67,9 cm)		34" (86,4 cm)		26-3/4" (67,9 cm)		34" (86,4 cm)		26-3/4" (67,9 cm)		34" (86,4 cm)	
height	65-3/4" (167,0 cm)		78" (198,0 cm)		67-3/4" (172,0 cm)		78" (198,0 cm)		67-3/4" (172,0 cm)		78" (198,0 cm)	
depth	39-3/4" (100,1 cm)		48" (121,9 cm)		39-3/4" (100,1 cm)		48" (121,9 cm)		39-3/4" (100,1 cm)		48" (121,9 cm)	
Weight	760 lbs (344,6 kg)		908 lbs (411,8 kg)		785 lbs (356,1 kg)		935 lbs (424,1 kg)		785 lbs (356,1 kg)		935 lbs (424,1 kg)	
Electrical	1 PH		3 PH		1 PH		3 PH		1 PH		3 PH	
minimum circuit ampacity	left	right	left	right	left	right	left	right	left	right	left	right
maximum overcurrent protection device	31A	31A	21A	21A	36A	31A	26A	21A	36A	31A	21A	21A
	45A	45A	30A	30A	50A	45A	35A	30A	50A	45A	30A	30A
International Option	1 Phase, 220-240 VAC, 50Hz or 3 Phase, 380-415 VAC, 50Hz											
Compressor	Two - 18,000 Btu/hr											
Drive Motor	Two - 2 hp											
Cooling	Water cooled units require 1/2" N.P.T. water and drain fittings.				Air cooled units require 3" (7,6 cm) air space on right, 10" (25,4 cm) above.				Requires two condensers (284105) and two precharged line sets(128313).			
Hopper Volume	Two - 8 gallon (30,28 liters)											
Freezing Cylinder Volume	Two - 1.33 gallon (5.32 quart), 5,4 liters											
Accessories	Side-mounted spinner #2177877 Dual bag connection kit #2177801											
Warranty	Five-year warranty on compressor, evaporator assembly, drive motor, speed reducers, and auger. One-year warranty on remaining parts and labor.											

Continuous research leads to ongoing product improvements; therefore, these specifications are subject to change without notice.

Distributed by:



FOODSERVICE EQUIPMENT

502 Highway 67 • Kiel, WI 53042-1600

920-894-2293 • 800-558-5807

Fax: 920-894-7029

E-mail: [foodservice@stoelting.com](mailto:foodservice@stoelting.com)

[www.stoeltingfoodservice.com](http://www.stoeltingfoodservice.com)

ISO 9001:2000 Registered

Certified, Listed and/or Recognized by:

