


## HIGH CAPACITY COMBINATION SOFT SERVE/SHAKE FREEZER



- Allows the operators to dispense outstanding soft serve from the left side, and thick creamy shakes from the right side, with the convenience and cost of one unit.
- Ultra high capacity with (2) 18,000 B.T.U.H. compressors and (two) 2 H.P. drive motors provides continuous production from each cylinder.
- Refrigerated mix storage cabinet holds (2) 8 gallon mix containers per cylinder, to produce up to 340 four-ounce cones, plus 170 eight-ounce shakes without refilling.
- Air/mix pumps inject the exact amount of air into your mix, maintaining consistent overrun to assure maximum profitability, with clean-in-place simplicity.
- Proprietary auger design gently folds mix and prevents product breakdown, producing a smoother, creamier product.
- Long-wearing parts offer lower preventative maintenance costs.
- Clear door shows visible moving product for merchandising appeal.
- Standby refrigeration mode provides fresh creamy product at opening time.
- Forced refrigeration switch; constant ready-to-serve mode for high volume dispensing.
- Mix low warning light automatically notifies operator when mix needs to be added.
- The U444 is the ideal choice for restaurants, drive-ins, recreational facilities, ice cream parlors, schools, and cafeterias.
- Optional bag connection system.
- Optional shake mixer.

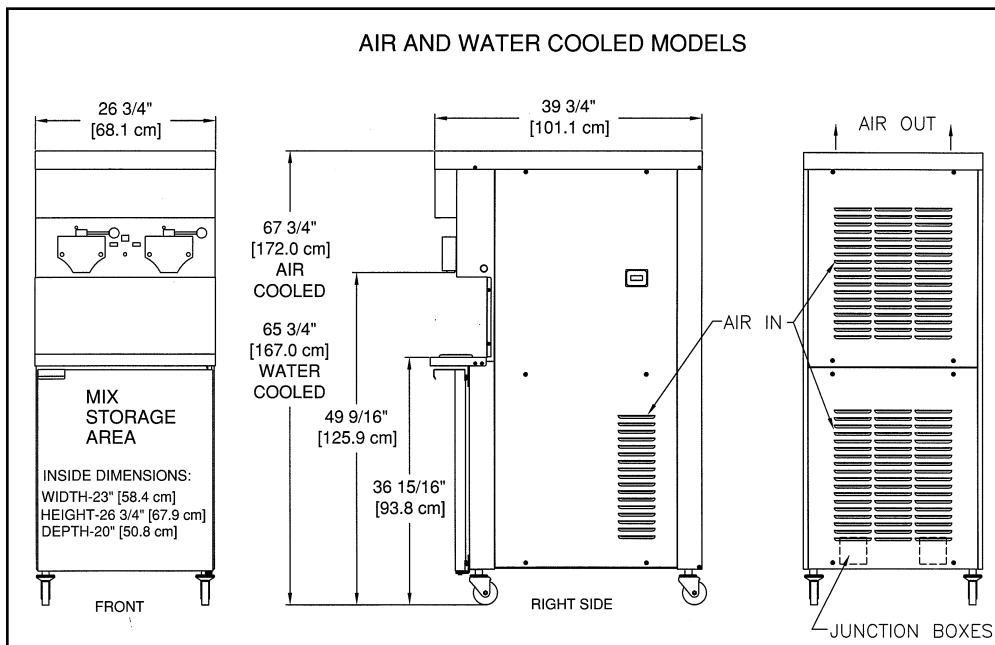

SPECIFICATIONS	MODEL U444 (water-cooled)				MODEL U444 (air-cooled)			
	FREEZER		WITH CRATE		FREEZER		WITH CRATE	
<b>DIMENSIONS</b>								
Depth	39 3/4" (101 cm)		48" (121.9 cm)		39 3/4" (101 cm)		48" (121.9 cm)	
Width	26 3/4" (68 cm)		34" (86.4 cm)		26 3/4" (68 cm)		34" (86.4 cm)	
Height	65 3/4" (167 cm)		78" (198.1 cm)		67 3/4" (172.0 cm)		78" (198.1 cm)	
<b>WEIGHT</b>								
	760 lbs. (344.7 kg)		908 lbs. (411.9 kg)		785 lbs. (356.1 kg)		935 lbs. (424.1 kg)	
<b>ELECTRICAL</b>	<b>ELECTRICAL 208/230 VOLT</b>				<b>ELECTRICAL 208/230 VOLT</b>			
			1 PHASE				3 PHASE	
			Left Side	Right Side	Left Side	Right Side	Left Side	Right Side
	Total Running Amps:		17.6	17.2	11.6	11.2	20.8	17.2
	Min. Circuit Ampacity:		31	31	21	21	36	31
	HACR Max. Circuit Breaker:		45	45	30	30	50	45
	Maximum Fuse Size:		45	45	30	30	50	45
	International: 220-240/380-415 volts/50 hz/3 phase.				International: 220-240/380-415 volts/50 hz/3 phase.			
<b>REFRIGERANT</b>	R404A				R404A			
<b>COMPRESSOR</b>	(2) 18,000 B.T.U.H.				(2) 18,000 B.T.U.H.			
<b>DRIVE MOTOR</b>	(2) 2 H.P.				(2) 2 H.P.			
<b>COOLING</b>	Water cooled				Air cooled			
<b>Air Flow</b>	In sides and back, out top 3" minimum clearance.				In sides and back, out top 3" minimum clearance.			
<b>PLUMBING FITTINGS</b>	Water cooled requires 1/2" N.P.T. water and drain fittings.							
<b>FREEZING CYLINDER SIZE</b>	(Two) 1.33 gallon, 5.3 quart., 5 liters				(Two) 1.33 gallon, 5.3 quart., 5 liters			
<b>OPTIONS</b>	Side mounted spinner kit 2177877; Dual bag connection kit 2177801							
<b>WARRANTY</b>	One-year warranty; five year warranty on compressor, evaporator assembly, drive motor, speed reducers, auger shaft, and auger flights (against breakage).							

Continuous research leads to ongoing product improvements; therefore, these specifications are subject to change without notice.

**Distributed by:**



502 Highway 67 • Kiel, WI 53042-1600  
 920-894-2293 • 800-558-5807  
 Fax: 920-894-7029  
 E-mail: commercial@stoelting.com  
 Internet: www.stoelting.com

ISO 9001:2000 Registered

Certified, Listed and/or Recognized by:



05/06