

Product Specifications

Heated Self-Service Case - 32"D

Lengths include end panels

- B2432H 24-1/2"L x 32-1/4"D x 82-1/4"H
- B2432H-4 24-1/2"L x 32-1/4"D x 82-1/4"H
- B3632H 36-1/2"L x 32-1/4"D x 82-1/4"H
- B3632H-4 36-1/2"L x 32-1/4"D x 82-1/4"H



MODEL SHOWN: B3632H

NOTE: SHOWN WITH OPTIONAL STAINLESS STEEL EXTERIOR

STANDARD FEATURES


- NOTE: The additional shelf option significantly increases electrical load for model. Refer to the -4 suffix model for these specifications.
- Flat upper front panel & header
- Integrated average product temperature of 160°F
- Shelving removable and adjustable on 1" centers
- Solid back panel, black
- Stainless steel Interior

Features	Standard	Options
EXTERIOR COLOR	<input type="checkbox"/> Laminated (non-premium) Confirm pattern/grain direction	<input type="checkbox"/> Laminated (premium) Confirm pattern/grain direction <input type="checkbox"/> Stainless steel (includes lower front panel)
LOWER FRONT PANEL COLOR	<input type="checkbox"/> Painted - Black	<input type="checkbox"/> Stainless steel (w/stainless ext. only)
BASE	<input type="checkbox"/> Casters w/ levelers	
END PANEL LEFT	<input type="checkbox"/> Full end panel w/mirror interior (metal edging)	<input type="checkbox"/> Cutaway end panel w/metal edging
END PANEL RIGHT	<input type="checkbox"/> Full end panel w/mirror interior (metal edging)	<input type="checkbox"/> Cutaway end panel w/metal edging
SHELVING	<input type="checkbox"/> Solid heated shelves (3), lighted	<input type="checkbox"/> Additional solid heated shelf, lighted (Refer to the -4 suffix model for electrical specifications)
LIGHTS	<input type="checkbox"/> Incandescent lights	<input type="checkbox"/> Ceramic Metal Halide high efficiency lighting
ELECTRICAL CONNECT	<input type="checkbox"/> 6' power cord (base exit)	<input type="checkbox"/> 6' power cord (top exit)
MISCELLANEOUS		<input type="checkbox"/> Second year parts & labor warranty (excludes compressor)


Product Specifications

Intended Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.	
Zone	Intended Product To Be Displayed
All	Packaged heated product
Integrated Prod Temp ° F	
160	

PLAN VIEW

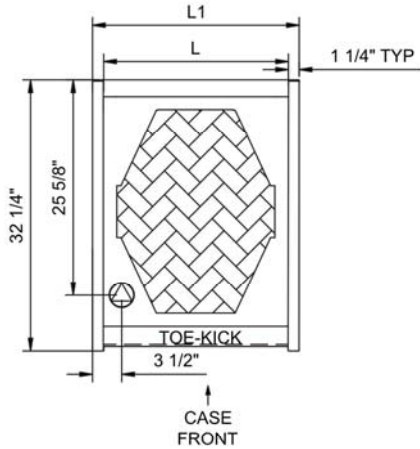

SIDE VIEW

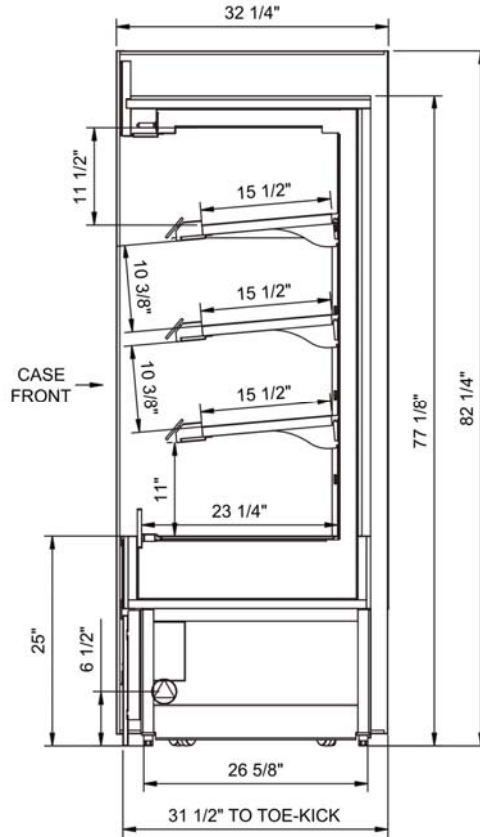

NOTE: ALL DIMENSIONS APPROXIMATE

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6\"/>
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.
- LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4\"/>
- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- REFRIGERATION LINE CONNECTION.
- DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications

Model	L"	L1"	L2"	System	Circuit #1	System Circuit Volts	Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	BTUH	Ship Wt
B2432H	N/A	24.50	.00	Heat	Circuit #1	208-240	1	60	13.91	2,942	2+G	Leads Single	N/A	N/A	950
B2432H-4	N/A	24.50	.00	Heat	Circuit #1	208-240	1	60	13.41	2,782	2+G	Leads Single	N/A	N/A	950
B3632H	N/A	36.50	.00	Heat	Circuit #1	208-240	1	60	20.34	4,296	2+G	Leads Single	N/A	N/A	1,150
B3632H-4	N/A	36.50	.00	Heat	Circuit #1	208-240	1	60	23.54	5,031	2+G	Leads Single	N/A	N/A	1,150

*** Does not include electric defrost on freezer models.

Important Notes:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) Performance issues (product temperatures, water on floor, etc.) caused by adverse conditions are not covered by warranty.
- 3) Keep unit at least 15' from exterior doors, overhead HVAC vents, or any air curtain disruption.
- 4) Do not expose unit to direct sunlight or any heat source (ovens, fryers, etc.).

Regulatory Approvals:

All Models ETL Listed to UL 197
ETL Listed to CAN/CSA 22.2 No. 109
ETL Sanitation to NSF 4

