

## Product Specifications

### Combination Ambient/Refrigerated Service Above Refrigerated Self-Service Case

Lengths include end panels

- C3Z3667 36-1/2"L x 41-7/8"D x 67-1/2"H
- C3Z4867 48-1/2"L x 41-7/8"D x 67-1/2"H



MODEL SHOWN: C3Z3667

#### STANDARD FEATURES


- Breeze™ w/EnergyWise s/c refrigeration
- Compressor air intake from rear and out front panel at toe kick. Front panel cannot be blocked.
- Full end panel w/mirror interior
- Integrated average product temperature of 40°F or less
- Middle service area w/baffle
- Non-refrigerated upper display
- One year parts & labor; 5 year compressor warranty
- Rear wrapping board
- Self-service refrigerated lower display w/17" solid shelf
- T-8 top & shelf lights

Features	Standard	Options
EXTERIOR COLOR	<input type="checkbox"/> Laminated (non-premium) Confirm pattern/grain direction	<input type="checkbox"/> Laminated (premium) Confirm pattern/grain direction <input type="checkbox"/> Stainless steel
INTERIOR COLOR	<input type="checkbox"/> Black	<input type="checkbox"/> Stainless steel
BASE	<input type="checkbox"/> Levelers	<input type="checkbox"/> 6"H legs <input type="checkbox"/> Casters
UPPER REAR	<input type="checkbox"/> Clear glass rear sliding doors w/o lock	<input type="checkbox"/> Reflective glass rear sliding doors w/o lock
ELECTRICAL CONNECT	<input type="checkbox"/> 6' straight blade power cord (self-cont.)	<input type="checkbox"/> 6' locking power cord (self-cont.)
MISCELLANEOUS		<input type="checkbox"/> LED lights <input type="checkbox"/> Rear door lock <input type="checkbox"/> Second year parts & labor warranty (excludes compressor)
ACCESSORIES		<input type="checkbox"/> Display steps (n/a w/shelf) <input type="checkbox"/> Night curtain, retractable, non-locking <input type="checkbox"/> Removable wire security cover, locking


## Product Specifications

<b>Intended Environment:</b> Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.	
<b>Zone</b>	<b>Intended Product To Be Displayed</b>
All	Packaged / unpackaged refrigerated products
<b>Integrated Prod Temp ° F</b>	
40	

PLAN VIEW

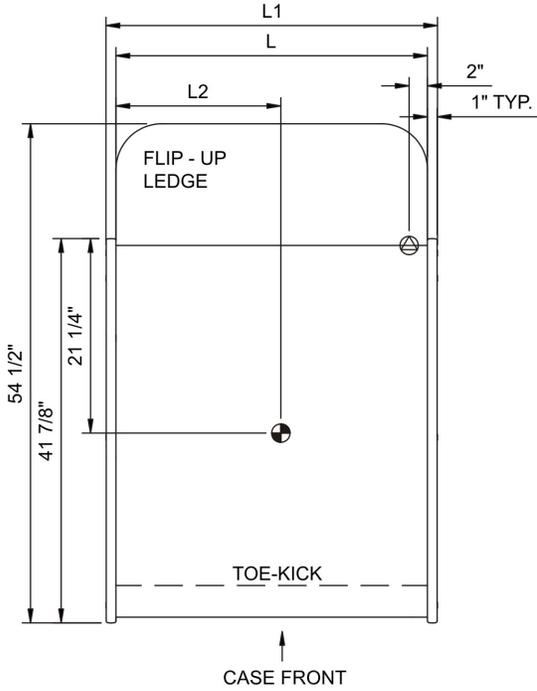

SIDE VIEW

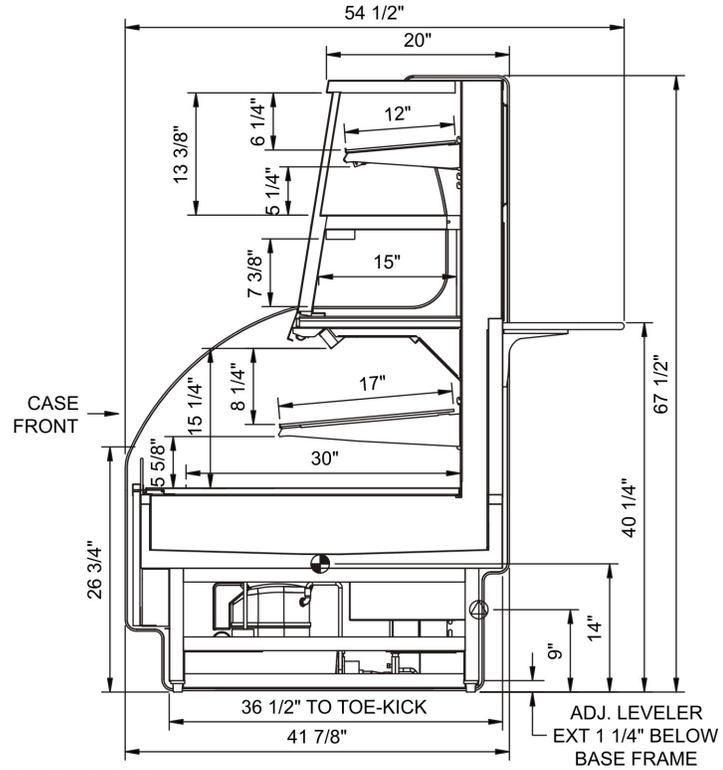

NOTE: ALL DIMENSIONS APPROXIMATE

-  ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
-  REFRIGERATION LINE CONNECTION.
-  SELF-CONTAINED CASE SERVICE ACCESS AREA.
-  LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).
-  REMOTE FLOOR SINK & UTILITIES ACCESS AREA.
-  DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications

Model	L"	L1"	L2"	System	Circuit Volts	Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	BTUH	Ship Wt	Frts Cls
C3Z3667	N/A	36.50	18.00	Self-Contained	Circuit #1	110-120	1	60	14,800	1,395	2+G	N/A	N/A	950	110
C3Z4867	N/A	48.50	13.00	Self-Contained	Circuit #1	110-120	1	60	16,000	1,585	2+G	N/A	N/A	1,000	110

\*\*\* Does not include electric defrost on freezer models.

Regulatory Approvals:	
All Models	<p>Accordance with AHRI Std 1200</p> <p>ETL Listed to UL 471</p> <p>ETL Listed to CAN/CSA 22.2 No. 120</p> <p>ETL Sanitation to NSF 7</p>

**Important Notes:**

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) 43" minimum door entry clearance required (without shipping skid).
- 3) Units are supplied with levelers. They must be adjusted during installation to ensure the unit is level and plumb. Dimensions reflect levelers extended 1 1/4". 4) Compressor air ventilation is out the front panel. Front panel cannot be blocked.



In Accordance with **AHRI Std 1200** DOE 2012 Energy Efficiency Compliant