

Product Specifications

**Non-Refrigerated Self-Service Countertop Case
 Straight Front**

Lengths include end panels

- CGS2830 28"L x 25"D x 30-1/2"H
- CGS3830 38"L x 25"D x 30-1/2"H



MODEL SHOWN:
CGS2830 SERVICE



MODEL SHOWN:
CGS2830 SELF-SERVICE

STANDARD FEATURES

- Clear glass rear swinging doors w/o lock
- Designed for service or self-service applications
- Glass ends
- One year parts & labor warranty
- Shelving removable and adjustable on 1" centers
- T-8 top light

Features	Standard	Options
INTERIOR / EXTERIOR COLOR	<input type="checkbox"/> Black	<input type="checkbox"/> Stainless steel
SHELVING	<input type="checkbox"/> Metal shelves, T-8 lighted (3)	<input type="checkbox"/> Metal shelves, LED lighted (3)
ELECTRICAL CONNECT	<input type="checkbox"/> 12" straight blade power cord	<input type="checkbox"/> Electrical leads (non-refrigerated)
MISCELLANEOUS		<input type="checkbox"/> Second year parts & labor warranty



Product Specifications

Intended Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.	
Zone	Integrated Prod Temp ° F
All	Ambient

REAR VIEW

PLAN VIEW

SIDE VIEW

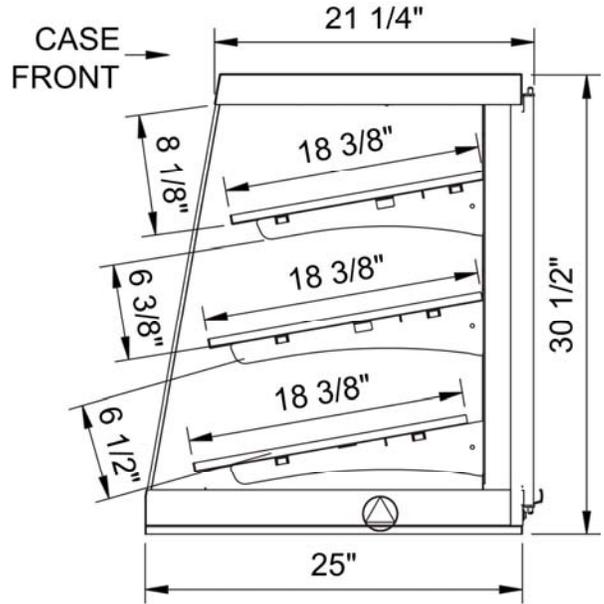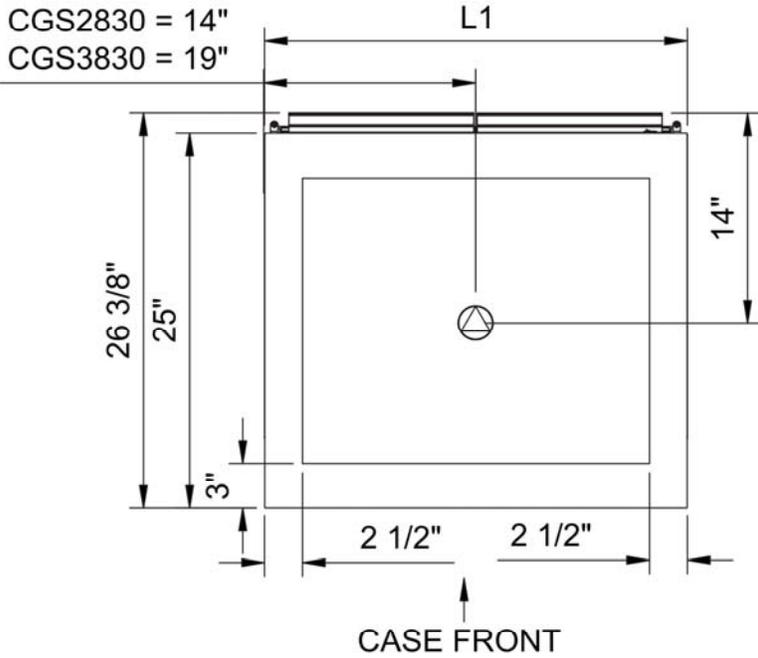

NOTE: ALL DIMENSIONS APPROXIMATE

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
- LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

- REFRIGERATION LINE CONNECTION.
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications

Model	L"	L1"	L2"	System Circuit Volts	Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	BTUH	Ship Wt	Frt Cls		
CGS2830	N/A	28.00	.00	Ambient	Circuit #1	110-120	1	60	0.40	51	2+G	5-15P	N/A	N/A	300	125
CGS3830	N/A	38.00	.00	Ambient	Circuit #1	110-120	1	60	0.56	75	2+G	5-15P	N/A	N/A	350	125

*** Does not include electric defrost on freezer models.

Important Notes:

Regulatory Approvals:

All Models ETL Listed to UL 65
ETL Sanitation to NSF 2

