

Product Specifications

Non-Refrigerated Self-Service Case

Lengths include end panels

- CO37 36-1/4"L x 32-5/8"D x 79-5/8"H
- CO47 47-1/4"L x 32-5/8"D x 79-5/8"H
- CO57 59-1/4"L x 32-5/8"D x 79-5/8"H
- CO67 71-1/4"L x 32-5/8"D x 79-5/8"H



MODEL SHOWN: CO37

STANDARD FEATURES


- One year parts & labor warranty
- Shelving removable and adjustable on 1" centers
- T-8 top light(s)

Features	Standard	Options
EXTERIOR COLOR	<input type="checkbox"/> Laminated (non-premium) Confirm pattern/grain direction	<input type="checkbox"/> Laminated (premium) Confirm pattern/grain direction <input type="checkbox"/> Stainless steel (includes lower front panel)
INTERIOR COLOR	<input type="checkbox"/> Black	<input type="checkbox"/> Stainless steel
LOWER FRONT PANEL COLOR	<input type="checkbox"/> Painted - Black	<input type="checkbox"/> Stainless steel (w/stainless ext. only)
BASE	<input type="checkbox"/> Casters	<input type="checkbox"/> Levelers <input type="checkbox"/> Seismic levelers (Q4695)
END PANEL LEFT	<input type="checkbox"/> Full end panel w/mirror interior	<input type="checkbox"/> Cutaway end panel <input type="checkbox"/> No end panel (for same case to case connections)
END PANEL RIGHT	<input type="checkbox"/> Full end panel w/mirror interior	<input type="checkbox"/> Cutaway end panel
EXTERIOR BACK PANEL	<input type="checkbox"/> Solid back panel, black	<input type="checkbox"/> Solid back panel, stainless steel
SHELVING	<input type="checkbox"/> Metal shelves, non-lighted	<input type="checkbox"/> Metal shelves, lighted (LED) <input type="checkbox"/> Metal shelves, lighted (T-8)
ELECTRICAL CONNECT	<input type="checkbox"/> 12" straight blade power cord	<input type="checkbox"/> 12" locking power cord <input type="checkbox"/> Electrical leads (non-refrigerated)
MISCELLANEOUS		<input type="checkbox"/> Roll-down security cover, locking (Requires two end panels (full or cutaway) per case) <input type="checkbox"/> Second year parts & labor warranty


Product Specifications

Intended Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.	
Zone	Intended Product To Be Displayed
All	Packaged non-refrigerated products
Integrated Prod Temp ° F	
Ambient	

PLAN VIEW

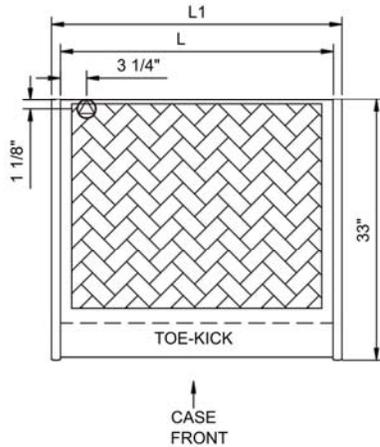

SIDE VIEW

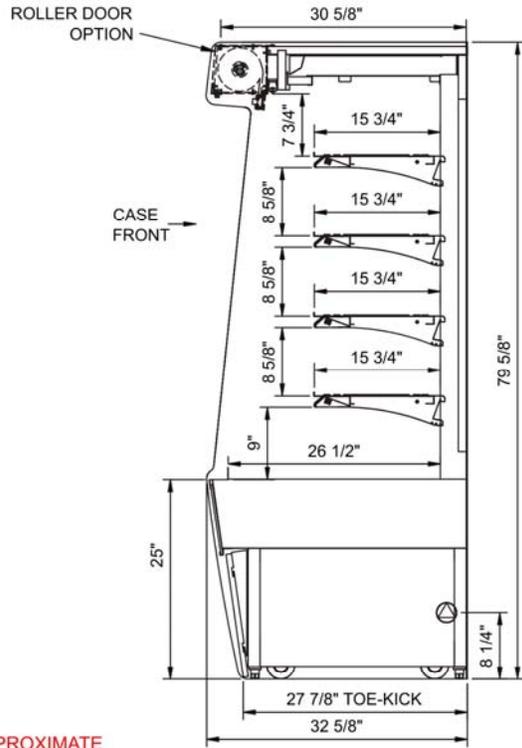

NOTE: ALL DIMENSIONS APPROXIMATE

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
- LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

- REFRIGERATION LINE CONNECTION.
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications																
Model	L"	L1"	L2"	System	Circuit	Volts	Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	BTUH	Ship Wt	Frt Cls
CO37	N/A	36.25	.00	Ambient	Circuit #1	110-120	1	60	0.81	85	2+G	Leads Single	N/A	N/A	N/A	125
CO47	N/A	47.25	.00	Ambient	Circuit #1	110-120	1	60	1.17	150	2+G	Leads Single	N/A	N/A	N/A	125
CO57	N/A	59.25	.00	Ambient	Circuit #1	110-120	1	60	1.52	192	2+G	Leads Single	N/A	N/A	N/A	125
CO67	N/A	71.25	.00	Ambient	Circuit #1	110-120	1	60	2.07	240	2+G	Leads Single	N/A	N/A	N/A	125

*** Does not include electric defrost on freezer models.

Important Notes:

Regulatory Approvals:

All Models
 Accordance with AHRI Std 1200
 ETL Listed to UL 471
 ETL Listed to CAN/CSA 22.2 No. 120
 ETL Sanitation to NSF 7



In Accordance with
AHRI Std 1200

DOE 2012
 Energy Efficiency
 Compliant