

Refrigerated Self-Service Case



MODEL SHOWN: CO47R



- |                                |                                   |
|--------------------------------|-----------------------------------|
|                                | <b>Lengths include end panels</b> |
| <input type="checkbox"/> CO37R | 36-1/4"L x 32-5/8"D x 79-5/8"H    |
| <input type="checkbox"/> CO47R | 47-1/4"L x 32-5/8"D x 79-5/8"H    |
| <input type="checkbox"/> CO57R | 59-1/4"L x 32-5/8"D x 79-5/8"H    |
| <input type="checkbox"/> CO67R | 71-1/4"L x 32-5/8"D x 79-5/8"H    |

**STANDARD FEATURES**


- Breeze~E (Type-II) w/ EnergyWise s/c refrigeration
- 4"D removable rear wall spacer (not included in depth dimensions)
- Compressor air front intake, rear discharge. Front panel cannot be blocked. Must remain 4" from wall
- Condensate pan (self-contained refig. only)
- Integrated average product temperature of 40°F or less
- One year parts & labor; 5 year compressor warranty
- Removable deck pans provide complete access to evaporator coil & refrigeration connections
- Shelving removable and adjustable on 1" centers
- T-8 top light(s)

Features	Standard	Options
<b>EXTERIOR COLOR</b>	<input type="checkbox"/> Laminated (non-premium) Confirm pattern/grain direction	<input type="checkbox"/> Laminated (premium) Confirm pattern/grain direction <input type="checkbox"/> Stainless steel (includes lower front panel)
<b>INTERIOR COLOR</b>	<input type="checkbox"/> Black	<input type="checkbox"/> Stainless steel
<b>LWR LOUVERED FRNT PANEL COLOR</b>	<input type="checkbox"/> Painted - Black	<input type="checkbox"/> Stainless steel (w/stainless ext. only)
<b>BASE</b>	<input type="checkbox"/> Casters (n/a with remote)	<input type="checkbox"/> Levelers <input type="checkbox"/> Seismic levelers (Q4695)
<b>END PANEL LEFT</b>	<input type="checkbox"/> Full end panel w/mirror interior	<input type="checkbox"/> Cutaway end panel <input type="checkbox"/> No end panel (for same case to case connections)
<b>END PANEL RIGHT</b>	<input type="checkbox"/> Full end panel w/mirror interior	<input type="checkbox"/> Case to case acrylic end <input type="checkbox"/> Cutaway end panel
<b>EXTERIOR BACK PANEL</b>	<input type="checkbox"/> Solid back panel, black	<input type="checkbox"/> Rear loading hinged doors, locking <input type="checkbox"/> Solid back panel, stainless steel
<b>SHELVING</b>	<input type="checkbox"/> Metal shelves, non-lighted	<input type="checkbox"/> Metal shelves, lighted (LED) <input type="checkbox"/> Metal shelves, lighted (T-8)
<b>ELECTRICAL CONNECT</b>	<input type="checkbox"/> 6' power cord (base exit)	<input type="checkbox"/> 6' power cord (top exit)
<b>REFRIGERATION</b>	<input type="checkbox"/> Breeze~E (Type-II) w/ EnergyWise s/c refrigeration	<input type="checkbox"/> Note: Remote doesn't incl Conds unit. Floor drain reqd. <input type="checkbox"/> Remote w/thermostat, solenoid & TXV
<b>MISCELLANEOUS</b>		<input type="checkbox"/> Case height wall spacer bracket (specify BL or SS) <input type="checkbox"/> Roll-down security cover, locking (Requires two end panels (full or cutaway) per case) <input type="checkbox"/> Second year parts & labor warranty (excludes compressor)
<b>ACCESSORIES</b>		<input type="checkbox"/> Clean Sweep® coil cleaner (n/a w/remote) <input type="checkbox"/> Night curtain, retractable, non-locking <input type="checkbox"/> Solid security cover, removable, locking


## Product Specifications

<b>Intended Environment:</b> Type II - Designed to operate in ambient conditions of 80°F and 60% relative humidity unless noted otherwise in system information below.	
<b>Zone</b>	<b>Integrated Prod Temp ° F</b>
All	40

### PLAN VIEW

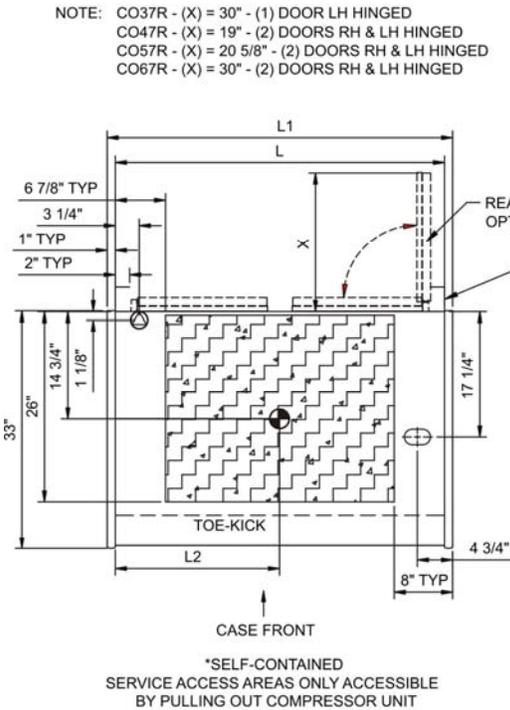

### SIDE VIEW

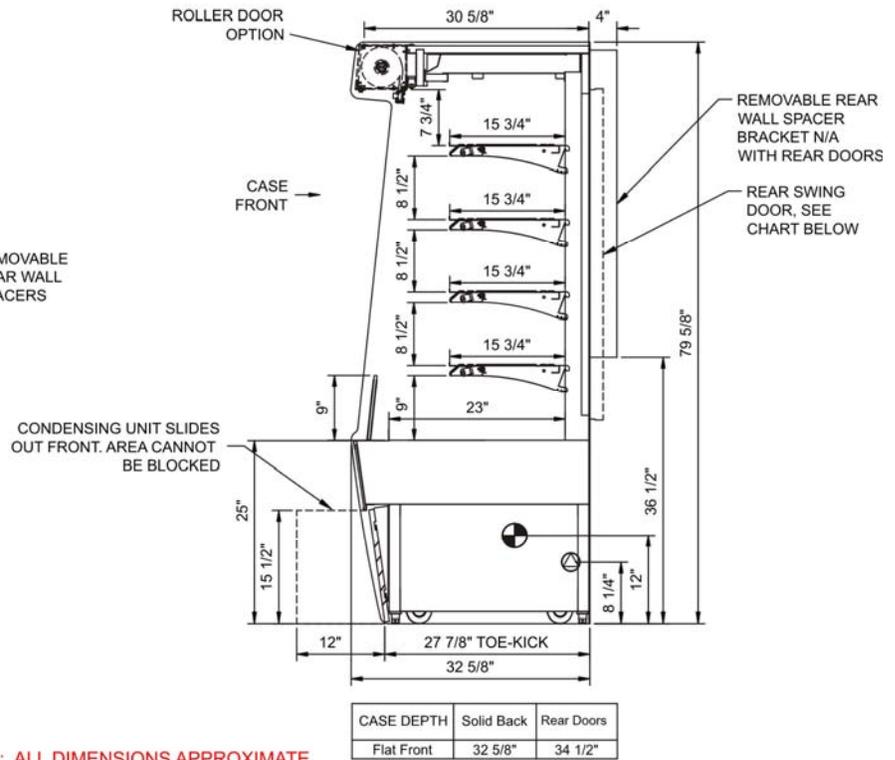

NOTE: ALL DIMENSIONS APPROXIMATE

ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).  
 LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

REFRIGERATION LINE CONNECTION.  
 REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

SELF-CONTAINED CASE SERVICE ACCESS AREA.  
 DRY CASE SERVICE ACCESS AREA.

### Model Technical Specifications

Model	L"	L1"	L2"	System Circuit Volts		Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	BTUH	Ship Wt	Frt CIs	
CO37R	N/A	36.25	18.00	Remote(Type I)	Circuit #1	110-120	1	60	1.27	116	2+G	Leads Multiple	20.0	5,400	960	110
				Remote(Type II)	Circuit #1	110-120	1	60	1.27	116	2+G	Leads Multiple	20.0	6,625		
				Self-Contained	Circuit #1	110-120	1	60	15.30	1,480	2+G	5-20P or L5-20P	N/A	N/A		
CO47R	N/A	47.25	23.50	Remote(Type I)	Circuit #1	110-120	1	60	1.60	155	2+G	Leads Multiple	20.0	6,850	1,150	110
				Remote(Type II)	Circuit #1	110-120	1	60	1.60	155	2+G	Leads Multiple	20.0	8,450		
				Self-Contained	Circuit #1	208-240	1	60	10.20	1,922	2+G	6-20P or L6-20P	N/A	N/A		
CO57R	N/A	59.25	10.00	Remote(Type I)	Circuit #1	110-120	1	60	2.33	213	2+G	Leads Multiple	20.0	8,775	1,350	110
				Remote(Type II)	Circuit #1	110-120	1	60	2.33	213	2+G	Leads Multiple	20.0	10,800		
				Self-Contained	Circuit #1	208-240	1	60	12.00	2,323	2+G	6-20P or L6-20P	N/A	N/A		
CO67R	N/A	71.25	31.25	Remote(Type I)	Circuit #1	110-120	1	60	2.93	259	2+G	Leads Multiple	20.0	10,525	1,550	110
				Remote(Type II)	Circuit #1	110-120	1	60	2.93	259	2+G	Leads Multiple	20.0	12,975		
				Self-Contained	Circuit #1	208-240	1	60	14.20	2,433	2+G	6-20P	N/A	N/A		

\*\*\* Does not include electric defrost on freezer models.

Regulatory Approvals:	
All Models	Accordance with AHRI Std 1200 ETL Listed to UL 471 ETL Listed to CAN/CSA 22.2 No. 120 ETL Sanitation to NSF 7



In Accordance with  
**AHRI Std 1200**

**DOE 2012**  
Energy Efficiency  
Compliant

### Important Notes:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) Performance issues (product temperatures, water on floor, etc.) caused by adverse conditions are not covered by warranty.
- 3) Keep unit at least 15' from exterior doors, overhead HVAC vents, or any air curtain disruption.
- 4) End panels must be tightly joined or kept at least 6" away from any structure to prevent condensation.
- 5) Do not expose unit to direct sunlight or any heat source (ovens, fryers, etc.).
- 6) Keep at least 8" of clearance above unit for air discharge (self-contained only).
- 7) Tile floors, low ceilings, or small rooms will increase noise level. Remote refrigeration recommended.