

Product Specifications

Non-Refrigerated Self-Service Countertop Case

CSC3223

Lengths include end panels
 31-1/2"L x 23-1/8"D x 36-3/8"H



MODEL SHOWN: CSC3223

NOTE: SHOWN W/OPTIONAL GRAPHICS HEADER & BLACK BASE COLOR. TRAYS NOT PROVIDED

STANDARD FEATURES


- 12" straight blade power cord
- Black interior
- Black trim
- Glass ends
- Glass swinging front doors
- Holds (4) 18" x 26" trays
- Light switch in base
- NOTE: Trays not supplied with unit.
- One year parts & labor warranty
- T-8 side lights
- Tray support non-lighted shelves, (trays not included)

Features	Standard	Options
BASE COLOR	<input type="checkbox"/> Gray base exterior	<input type="checkbox"/> Black base exterior
BASE	<input type="checkbox"/> 6"H base w/bag area	<input type="checkbox"/> 2"H solid base
FRONT DOOR GRAPHICS	<input type="checkbox"/> None	<input type="checkbox"/> Front door graphics (customer supplied)
HEADER GRAPHICS	<input type="checkbox"/> None	<input type="checkbox"/> Header sign graphics (customer supplied) <input type="checkbox"/> Header sign, plain
REAR	<input type="checkbox"/> Solid back panel	<input type="checkbox"/> Clear glass rear swinging doors w/o lock <input type="checkbox"/> Mirror back panel
MISCELLANEOUS		<input type="checkbox"/> Second year parts & labor warranty


Product Specifications

Intended Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.		
Zone	Intended Product To Be Displayed	Integrated Prod Temp ° F
All	Unpackaged non-refrigerated products	Ambient

PLAN VIEW

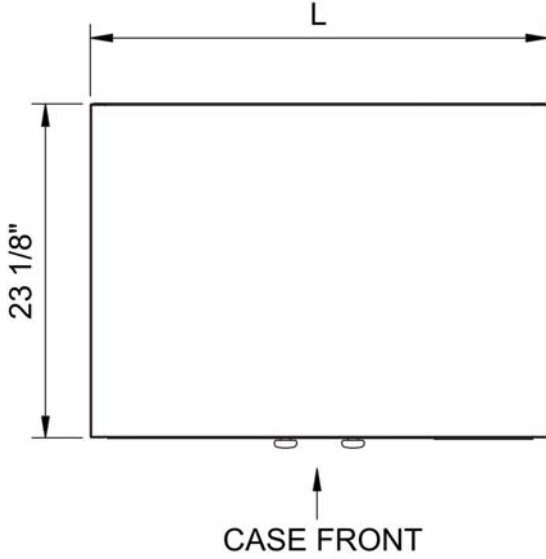

SIDE VIEW

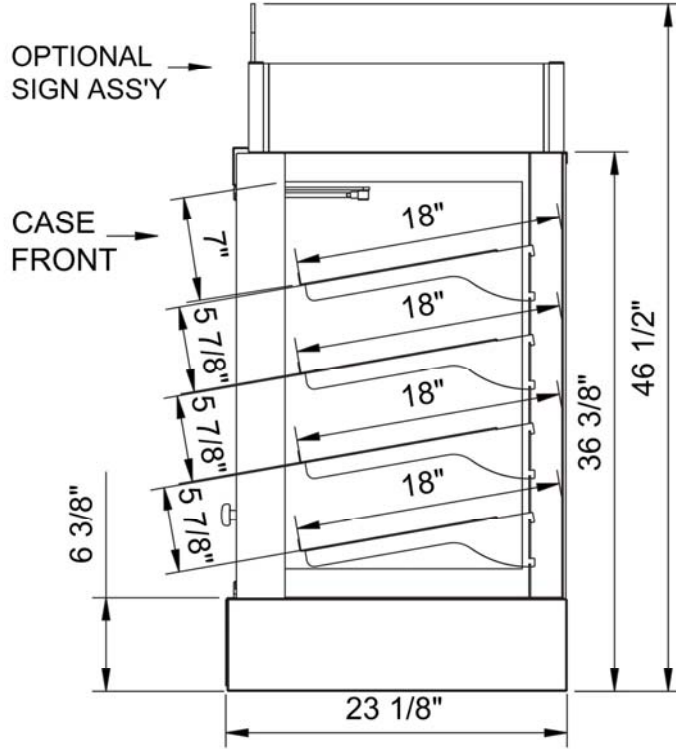

NOTE: ALL DIMENSIONS APPROXIMATE

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.
- LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).
- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- REFRIGERATION LINE CONNECTION.
- DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications																
Model	L"	L1"	L2"	System Circuit Volts	Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	BTUH	Ship Wt	Frts Cls		
CSC3223	N/A	31.50	.00	Ambient	Circuit #1	110-120	1	60	0.30	34	2+G	5-15P	N/A	N/A	300	150

*** Does not include electric defrost on freezer models.

Important Notes:

- 1) 24 1/8" Minimum door entry clearance required (Without shipping skid).

Regulatory Approvals:	
All Models	ETL Listed to UL 65 ETL Sanitation to NSF 2

