

## Product Specifications

### Refrigerated Self-Service Case

- Lengths include end panels
- GHSS460R 51"L x 42-7/8"D x 60"H
  - GHSS660R 75-3/8"L x 42-7/8"D x 60"H



MODEL SHOWN: GHSS660R

### STANDARD FEATURES

- Breeze™ w/EnergyWise s/c refrigeration
- Compressor air intake from rear and out front panel at toe kick. Front panel cannot be blocked.
- Flat front panel
- Integrated average product temperature of 40°F or less
- One year parts & labor; 5 year compressor warranty
- Shelving removable and adjustable on 1" centers
- Stainless steel rear exterior
- T-8 top light

Features	Standard	Options
<b>EXTERIOR COLOR</b>	<input type="checkbox"/> Laminated (non-premium) Confirm pattern/grain direction	<input type="checkbox"/> Laminated (premium) Confirm pattern/grain direction <input type="checkbox"/> Stainless steel
<b>INTERIOR COLOR</b>	<input type="checkbox"/> Black	<input type="checkbox"/> Stainless steel <input type="checkbox"/> White
<b>TRIM COLOR</b>	<input type="checkbox"/> Black	<input type="checkbox"/> Silver
<b>BASE</b>	<input type="checkbox"/> Casters w/ levelers (n/a w/ remote ref.)	<input type="checkbox"/> 6"H legs
<b>END PANEL LEFT</b>	<input type="checkbox"/> Full end panel w/mirror interior	<input type="checkbox"/> Cutaway with glass <input type="checkbox"/> Full end to match GHSS'H model <input type="checkbox"/> No end panel (for same case to case connections)
<b>END PANEL RIGHT</b>	<input type="checkbox"/> Full end panel w/mirror interior	<input type="checkbox"/> Cutaway with glass <input type="checkbox"/> Full end to match GHSS'H model <input type="checkbox"/> No end panel (for same case to case connections)
<b>LOWER FRONT PANEL</b>	<input type="checkbox"/> Painted - Black	<input type="checkbox"/> Stainless steel
<b>ELECTRICAL CONNECT</b>	<input type="checkbox"/> 6' straight blade power cord (self cont.)	<input type="checkbox"/> 6' locking power cord (self cont.) <input type="checkbox"/> Electrical leads (remote)
<b>REFRIGERATION</b>	<input type="checkbox"/> Breeze™ w/EnergyWise s/c refrigeration	<input type="checkbox"/> NOTE: Remote only available w/rail base w/shims. N/A w/ levelers, casters or legs. <input type="checkbox"/> Note: Remote doesn't incl Conds unit. Floor drain reqd. <input type="checkbox"/> Remote w/thermostat, solenoid & TXV
<b>MISCELLANEOUS</b>		<input type="checkbox"/> Clear glass rear sliding doors w/o lock <input type="checkbox"/> Metal shelves, LED lighted (4) <input type="checkbox"/> Metal shelves, T-8 lighted (4) <input type="checkbox"/> Scale stand w/receptacle (requires separate circuit) <input type="checkbox"/> Second year parts & labor warranty (excludes compressor)
<b>ACCESSORIES</b>		<input type="checkbox"/> Clean Sweep® coil cleaner (n/a w/remote) <input type="checkbox"/> Night curtain, retractable, non-locking <input type="checkbox"/> Removable wire security cover, locking

## Product Specifications

**Intended Environment:** Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.

**Zone** Intended Product To Be Displayed



**Integrated Prod Temp ° F**

All Packaged refrigerated products

40

**PLAN VIEW**

**SIDE VIEW**

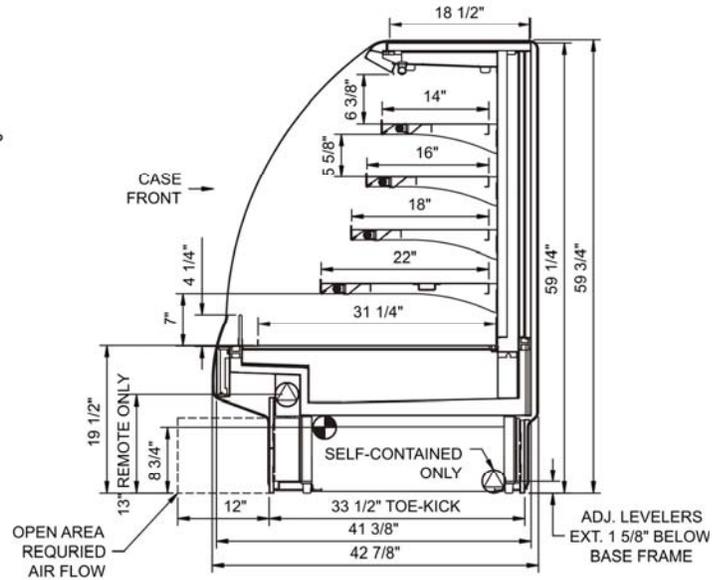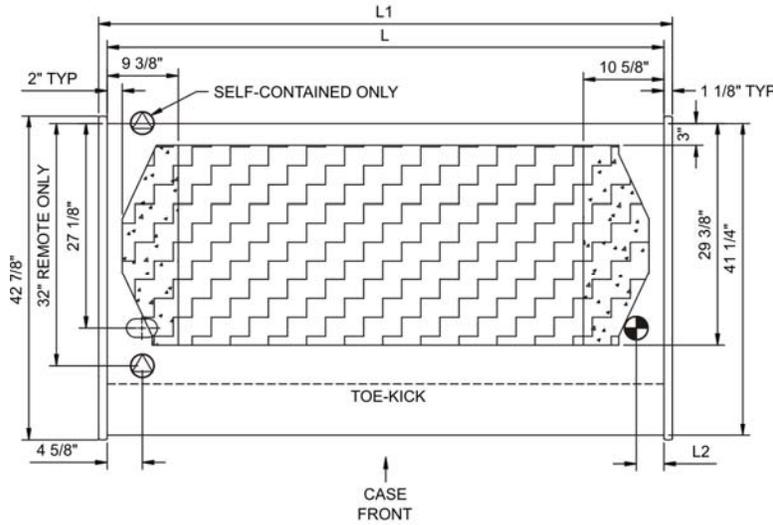

**NOTE: ALL DIMENSIONS APPROXIMATE**

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
- LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

- REFRIGERATION LINE CONNECTION.
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- DRY CASE SERVICE ACCESS AREA.

**Model Technical Specifications**

Model	L"	L1"	L2"	System Circuit Volts		Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	BTUH	Ship Wt	Frt Cls	
GHSS460R	N/A	51.00	3.63	Remote(Type I)	Circuit #1	110-120	1	60	2.05	209	2+G	Leads Multiple	20	7,050	850	110
				Self-Contained	Circuit #1	208-240	1	60	10.20	1,956	2+G	6-20P or L6-20P	N/A	N/A		
GHSS660R	N/A	75.38	3.63	Remote(Type I)	Circuit #1	110-120	1	60	3.41	315	2+G	Leads Multiple	20	10,500	1,250	110
				Self-Contained	Circuit #1	208-240	1	60	13.90	2,587	2+G	6-20P or L6-20P	N/A	N/A		

\*\*\* Does not include electric defrost on freezer models.

**Regulatory Approvals:**

All Models: Accordance with AHRI Std 1200  
ETL Listed to UL 471  
ETL Listed to CAN/CSA 22.2 No. 120  
ETL Sanitation to NSF 7



**Important Notes:**

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) 45" minimum door entry clearance required (without shipping skid).
- 3) Units are supplied with levelers. They must be adjusted during installation to ensure the unit is level and plumb. Dimensions reflect levelers extended 1 1/4".