

Product Specifications

Hot Service Case

Lengths include 1-1/8" end panels

- GMS4H
- GMS6H

51"L x 42-3/4"D x 51-5/8"H
 75-3/8"L x 42-3/4"D x 51-5/8"H



MODEL SHOWN: GMS4H

NOTE: INTERIOR PANS NOT PROVIDED W/CASE - GMS4H = (3) FULL & (3) 1/3 SIZE 4"D PANS, GMS6H = (5) FULL & (5) 1/3 SIZE 4"D PANS

STANDARD FEATURES


- Designed for dry heat
- Incandescent bulbs & infrared overhead heat
- Independently heated wells controlled by thermostat
- Integrated average product temperature of 160°F
- One year parts & labor warranty
- Stainless steel interior
- Stainless steel rear exterior
- Terminal block

| Features | Standard | Options |
|--------------------------------|--|--|
| EXTERIOR COLOR | <input type="checkbox"/> Laminated (non-premium) Confirm pattern/grain direction | <input type="checkbox"/> Laminated (premium) Confirm pattern/grain direction <input type="checkbox"/> Stainless steel |
| LOWER FRONT PANEL COLOR | <input type="checkbox"/> Painted - Black | <input type="checkbox"/> Stainless steel |
| TRIM COLOR | <input type="checkbox"/> Black | <input type="checkbox"/> Silver |
| BASE | <input type="checkbox"/> Rail system for shims | <input type="checkbox"/> 6"H legs |
| END PANEL LEFT | <input type="checkbox"/> Cutaway with glass | <input type="checkbox"/> Full end panel w/mirror interior (No mirror w/ss ext) <input type="checkbox"/> No end panel (for same case to case connections) |
| END PANEL RIGHT | <input type="checkbox"/> Cutaway with glass | <input type="checkbox"/> Full end panel w/mirror interior (No mirror w/ss ext) <input type="checkbox"/> No end panel (for same case to case connections) |
| FRONT GLASS | <input type="checkbox"/> Curved single pane, lift-up front glass w/o lock | <input type="checkbox"/> Flat angled single pane, lift-up front glass w/o lock |
| UPPER REAR | <input type="checkbox"/> Clear glass rear sliding doors w/o lock | <input type="checkbox"/> Reflective glass rear sliding doors w/o lock |
| MISCELLANEOUS | | <input type="checkbox"/> Front glass lock <input type="checkbox"/> Rear door lock <input type="checkbox"/> Scale stand w/receptacle (requires separate circuit) <input type="checkbox"/> Second year parts & labor warranty |
| ACCESSORIES | | <input type="checkbox"/> Power cord (n/a w/scale stand) <input type="checkbox"/> Rear wrapping board |


Product Specifications

| | |
|--|----------------------------------|
| Intended Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below. | |
| Zone | Integrated Prod Temp ° F |
| All | Unpackaged heated product 160 |

PLAN VIEW

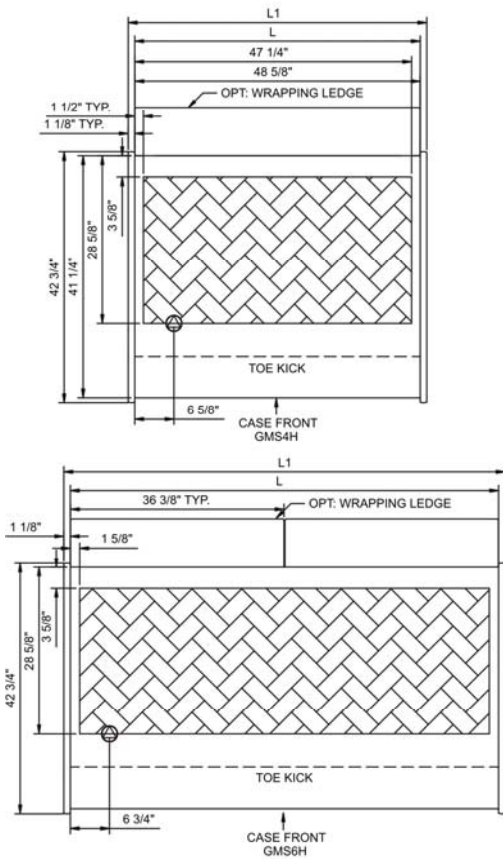

SIDE VIEW

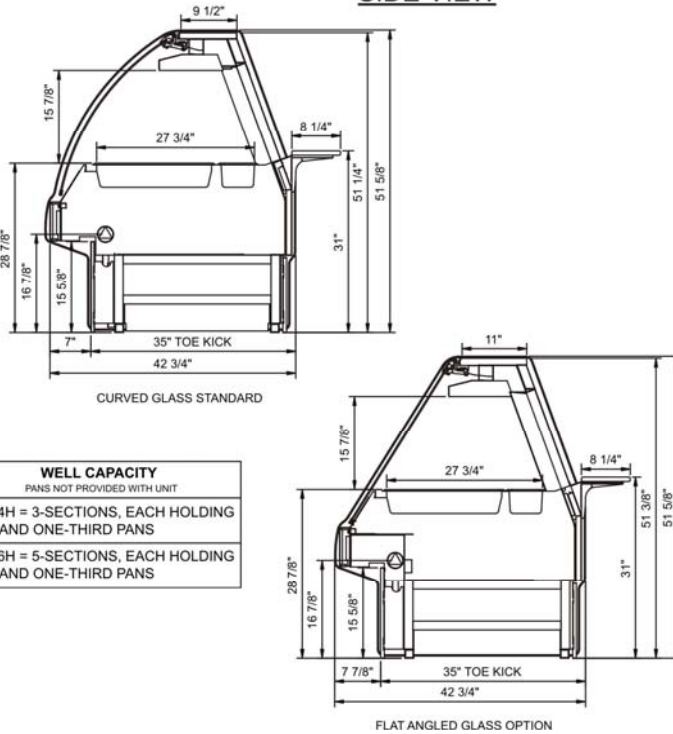

WELL CAPACITY
PANS NOT PROVIDED WITH UNIT
GMS4H = 3-SECTIONS, EACH HOLDING ONE AND ONE-THIRD PANS
GMS6H = 5-SECTIONS, EACH HOLDING ONE AND ONE-THIRD PANS

- NOTE: ALL DIMENSIONS APPROXIMATE**
- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
 - LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).
 - REFRIGERATION LINE CONNECTION.
 - REMOTE FLOOR SINK & UTILITIES ACCESS AREA.
 - SELF-CONTAINED CASE SERVICE ACCESS AREA.
 - DRY CASE SERVICE ACCESS AREA.

| Model Technical Specifications | | | | | | | | | | | | | | | | |
|--------------------------------|-------|-------|-----|--------|---------------|-----|------|----------|-------|-------|-----------|--------------|------|---------|---------|-----|
| Model | L" | L1" | L2" | System | Circuit Volts | Phs | Freq | Amps *** | Watts | Wires | NEMA Plug | SST | BTUH | Ship Wt | Frt Cls | |
| GMS4H | 48.75 | 51.00 | .00 | Heat | Circuit #1 | 208 | 1 | 50-60 | 11.80 | 2,530 | 2+G | Leads Single | N/A | N/A | 770 | 110 |
| | | | | | | 240 | 1 | 50-60 | 13.60 | 3,329 | 2+G | Leads Single | N/A | N/A | | |
| | | | | | | 208 | 3 | 50-60 | 7.97 | 2,530 | 3+G | Leads Single | N/A | N/A | | |
| | | | | | | 240 | 3 | 50-60 | 9.16 | 3,329 | 3+G | Leads Single | N/A | N/A | | |
| GMS6H | 73.13 | 75.38 | .00 | Heat | Circuit #1 | 208 | 1 | 50-60 | 19.60 | 4,197 | 2+G | Leads Single | N/A | N/A | 900 | 110 |
| | | | | | | 240 | 1 | 50-60 | 22.60 | 5,529 | 2+G | Leads Single | N/A | N/A | | |
| | | | | | | 208 | 3 | 50-60 | 15.40 | 4,197 | 3+G | Leads Single | N/A | N/A | | |
| | | | | | | 240 | 3 | 50-60 | 17.80 | 5,529 | 3+G | Leads Single | N/A | N/A | | |

*** Does not include electric defrost on freezer models.

| Regulatory Approvals: | |
|-----------------------|--|
| All Models | Accordance with AHRI Std 1200 ETL Listed to UL 197 ETL Listed to CAN/CSA 22.2 No. 109 ETL Sanitation to NSF 4 |

Important Notes:
1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
2) 43" minimum door entry clearance required (without shipping skid).

